

REGISTRATION INTERFACE
BRIDGED MULTIPLE
TIP AND RING ARRANGEMENTS
RJ21X, RJ22X, RJ23X, AND RJ24X

1. GENERAL

1.01 This section provides information on the standard wiring arrangements to be provided under the Federal Communications Commission (FCC) Registration program.

1.02 If this section is reissued, the reasons for reissue will be contained in this paragraph.

1.03 The arrangements in this section use a 50-pin miniature ribbon connector (female) to provide a bridged tip and ring connection of several telephone lines. Where Key Telephone Systems (KTS) are involved, the A and A1 leads may also be supplied. The plug in the registered customer provided equipment (CPE) must be a compatible 50-pin miniature ribbon plug (male).

1.04 The lead to pin assignments differ for each arrangement, requiring care be taken that the connector be wired per Fig. 2 through 5. Fig. 1 is provided as an aid in establishing the position and numbering of the contacts in the connector.

1.05 In some of the arrangements only tip and ring are to be furnished to the CPE. Disposition of the other leads should be per local instructions.

Note: Circuit incompatibility may occur involving the spare leads if a change of service is installed, ie, RJ21X, if installed originally, would not be compatible with a subsequent installation of RJ22X. Whenever service is altered at a location involving registration USOC codes, verify that all appearances are properly wired.

1.06 Unless otherwise specifically required by a particular wiring arrangement, access to the required leads can be at any access point. If installed in a large key system with color-keyed backboards, the auxiliary (yellow) field should be used; otherwise, access at satellite closets, distribution boxes, connecting blocks, etc.

1.07 When necessary to access leads in COM KEY* installations, wire as follows:

(1) COM KEY 416—Tip and ring ahead of the line circuit can be obtained only at the 91A connecting block for the primary station. A and A1 will require use of a KS-19252 adapter in the cabling loop. A short length of connector cable must be plugged into the adapter and the raw end terminated on a 66-type connecting block. The required leads are then accessed on the connecting block. Where T, R, A, and A1 are required behind the line circuit, the KS-19252 adapter and short connector cable are again used but all leads are accessed on the 66-type connecting block. Refer to Section 518-450-105 for information on COM KEY 416.

(2) COM KEY 718—Tip and ring ahead of the line circuit can be obtained at the incoming CO/PBX line terminations on block 3 using 183B adapters. If T, R, A, or A1 are required behind the line circuit, they can be accessed per line at any of the line appearances of the station terminations on blocks 3, 4, or 5. Again use 183B adapters. For information on COM KEY 718, refer to Section 518-450-100.

(3) COM KEY 1434—Tip and ring ahead of the line circuit can be accessed at the incoming line terminations on block 7 using 183B adapters. T and R behind the line circuit and A and A1

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

for a particular line can be accessed at any of the line appearances of the station terminations on blocks 6 through 15 using 183B adapters. For information on COM KEY 1434, refer to Section 518-450-102.

(4) COM KEY 2152—Tip and ring ahead of the line circuit can be accessed on block 3 of the 100A1 or 101A1 connecting unit. T and R behind the line circuit and A and A1 are accessed per line on the station cutdown blocks of the connecting units. Use 183B2 adapters to provide termination. For information on COM KEY 2152, refer to Section 518-450-110.

*Trademark

2. IDENTIFICATION

2.01 USOC RJ21X: This arrangement provides a bridged connection of the tip and ring of a multiple number of CO or PBX trunks to the CPE. The connection is furnished through a female ribbon connector, such as the KS-16690 connector or equivalent, as part of an A25B connector cable. Up to 25 trunks or lines can be furnished (Fig. 2). Bridging to the tip and ring may be at various locations. Typical usage for RJ21X would be for connection of registered traffic data recording equipment furnished by the customer.

2.02 USOC RJ22X: Provides up to 12 CO/PBX circuits to the CPE where the tip and ring must be bridged ahead of the line circuit and A lead control is required. Leads furnished to the CPE on a per line basis are T, R, A, and A1 using a KS-16690 connector or equivalent (Fig. 3). Access to leads will probably be at the KTS to permit connecting tip and ring ahead of the line circuit and A and A1 behind line circuit. Primary use of arrangement will be where a number of ancillary devices, requiring A lead control, are to be accessed by the CPE.

2.03 USOC RJ23X: This arrangement is similar to RJ22X except the tip and ring,

as well as A and A1, are connected behind the line circuit. Up to 12 circuits are connected using the KS-16690 connector or equivalent (Fig. 4).

2.04 USOC RJ24X: Provides the same T, R, and A appearances plus A1 as a standard 5-line key telephone set to the CPE (Fig. 5). The L and LG appearances are omitted. Connection to the CPE is through a KS-16690 connector or equivalent. All connections are bridged behind the line circuit.

Note: Some multibutton key sets are terminated in other than the standard wiring arrangement. When accessing the leads for this arrangement, care must be taken that the desired leads will appear on the connector as required.

3. MAINTENANCE


3.01 Maintenance of the wiring arrangements covered in this section is limited to:

- Verification of the telephone company wiring and equipment
- Assurance that the required leads are supplied in the interface used for CPE connection.

No attempt should be made to test, modify, or repair customer-owned and maintained equipment.


3.02 When in the judgment of repair personnel the trouble is located in the CPE, the Repair Service Bureau should be notified so that proper Maintenance of Service Billing can be initiated as required and as outlined in the following:

- Section 660-101-312, Maintenance of Service Charge on Services With Customer-Provided Equipment (CPE)
- Section 660-101-318, Tariff and Registration Violation Notice Procedures.

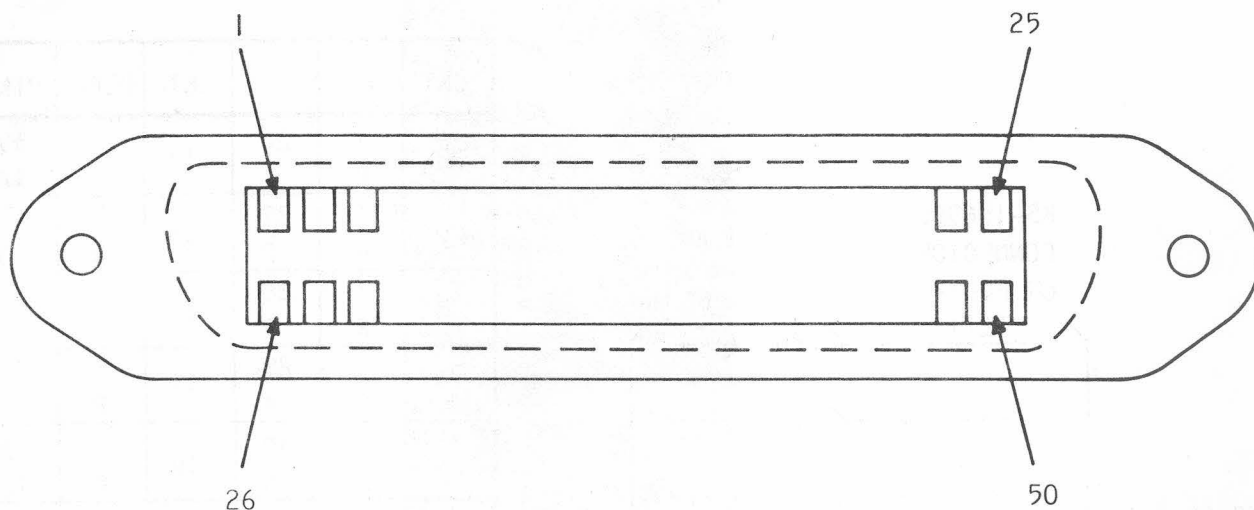

NOTE:
CONNECTOR VIEWED FROM WIRING SIDE

Fig. 1—Location of Contacts in KS-16690 Connector

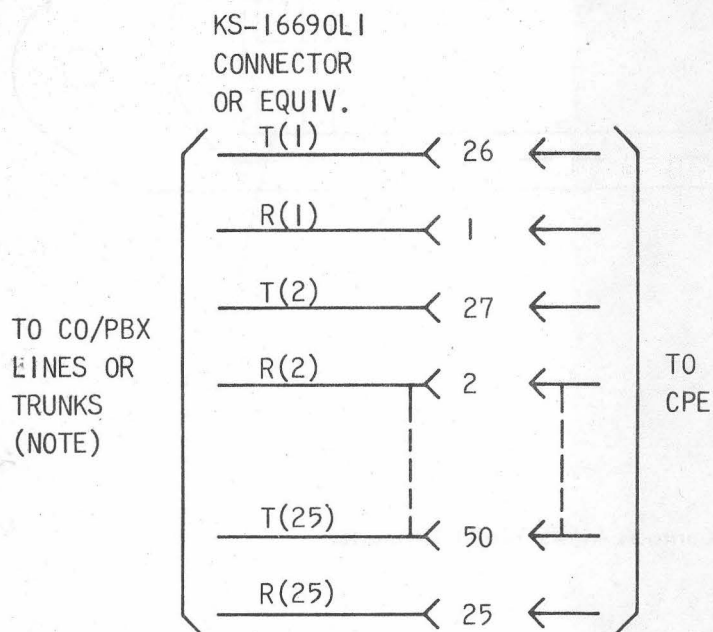


NOTE:

CONNECT CIRCUITS
AS REQUIRED

CKT	LEAD	PIN	CKT	LEAD	PIN
1	T R	26 1	14	T R	39 14
2	T R	27 2	15	T R	40 15
3	T R	28 3	16	T R	41 16
4	T R	29 4	17	T R	42 17
5	T R	30 5	18	T R	43 18
6	T R	31 6	19	T R	44 19
7	T R	32 7	20	T R	45 20
8	T R	33 8	21	T R	46 21
9	T R	34 9	22	T R	47 22
10	T R	35 10	23	T R	48 23
11	T R	36 11	24	T R	49 24
12	T R	37 12	25	T R	50 25
13	T R	38 13			


Fig. 2—Connections for USOC RJ21X—Multiple Bridged Tip and Ring

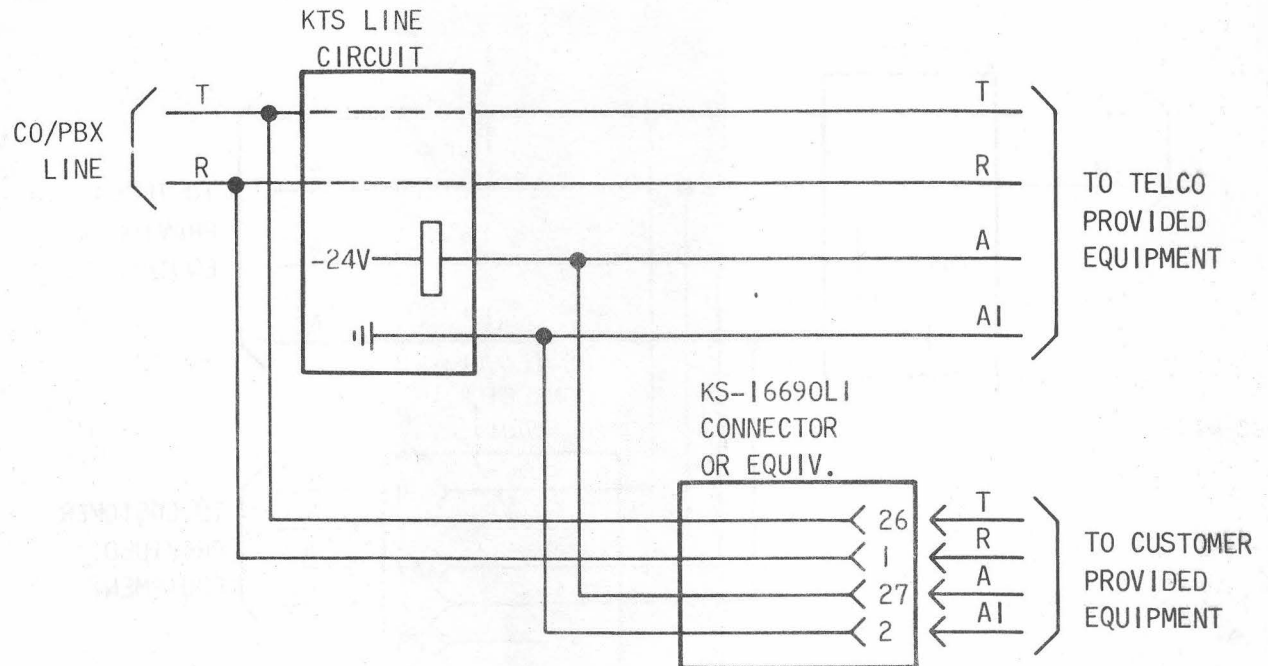

CKT	LEAD	PIN	CKT	LEAD	PIN
1	T	26	7	A	39
	R	1		AI	14
	AI	27	8	T	40
2	T	28		R	15
	R	3		A	41
	AI	29	9	T	42
3	T	30		R	17
	R	5		A	43
	AI	31	10	T	44
4	T	32		R	19
	R	7		A	45
	AI	33	11	T	46
5	T	34		R	21
	R	9		A	47
	AI	35	12	T	48
6	T	36		R	23
	R	11		A	49
	AI	37		AI	24
7	T	38			50
	R	13			25

NOTE:
CONNECT
CIRCUITS AS
REQUIRED. ONLY
1ST CIRCUIT SHOWN
CONNECTED

Fig. 3—Connections for USOC RJ22X—Multiple Bridged Tip and Ring Ahead of Line Circuit With A Lead Control

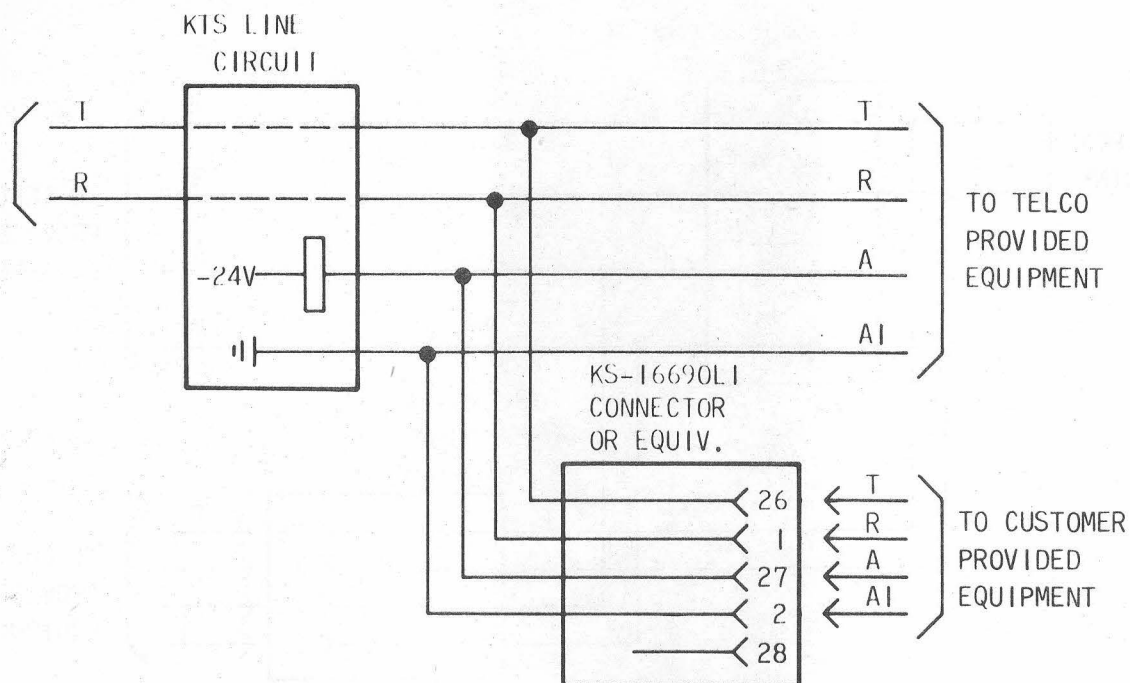

CKT	LEAD	PIN	CKT	LEAD	PIN
1	T	26	7	A	39
	R	1		AI	14
	AI	27	8	T	40
2	T	28		R	15
	R	3		A	41
	AI	29	9	T	42
3	T	30		R	17
	R	5		A	43
	AI	31	10	T	44
4	T	32		R	19
	R	7		A	45
	AI	33	11	T	46
5	T	34		R	21
	R	9		A	47
	AI	35	12	T	48
6	T	36		R	23
	R	11		A	49
	AI	37			24
7	T	38			50
	R	13			25


NOTE:

CONNECT CIRCUITS
AS REQUIRED. ONLY
1ST CIRCUIT SHOWN
CONNECTED.

Fig. 4—Connections for USOC RJ23X—Multiple Bridged Tip and Ring With A Lead Control Behind Line Circuit

KS-16690LI
CONNECTOR
OR EQUIV.

TO KTS
LINE
CIRCUIT
(NOTES
1 AND 2)

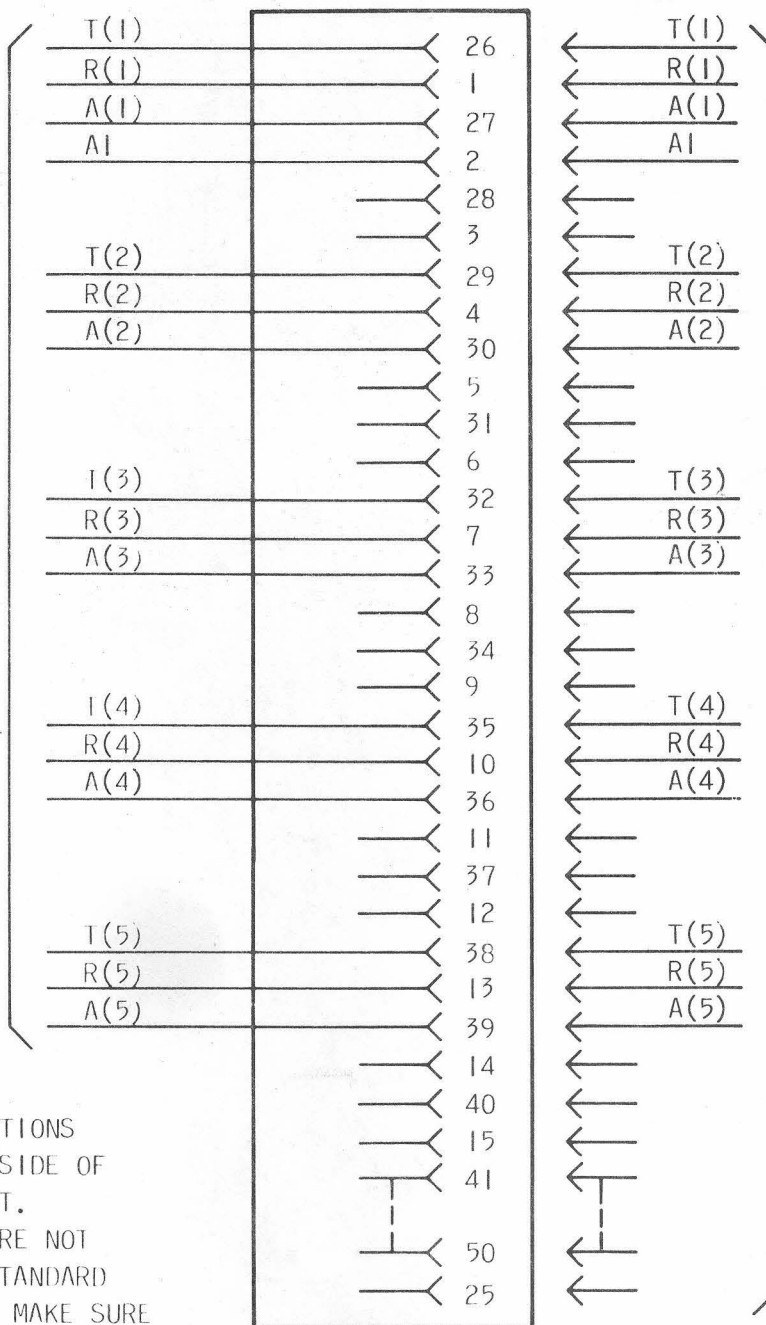

NOTES:

1. MAKE CONNECTIONS ON STATION SIDE OF LINE CIRCUIT.
2. SOME SETS ARE NOT WIRED PER STANDARD COLOR CODE. MAKE SURE PROPER LEADS ARE CONNECTED TO TERMINALS SHOWN.

Fig. 5—Connections for USOC RJ24X—Multiple Bridged Tip and Ring With A Lead Control, Standard Appearance