


110. PRIOR TO ISSUE 3-B REVISORS (C) AND (C) AND
TERMINAL BT OF HWT TRANSFORMERS WERE NOT SHOWN.
CAPACITORS (C) AND (C) WERE 1750A AND REVISOR
(C) WERE 107A-30,000A, 1575-500A,
AS-500A ELECTRO AND 15A-30A REW.

111. FOR RECORD OF FIGURES, WIRING AND APPARATUS CHANGES SEE TABLE.
112. USE FIG. F WITH FIG. J ONLY WHEN 24V FIL BATTERY IS NOT AVAILABLE. WHEN "10" F IS USED, PROVIDE RESISTOR IN INPUT LEADS A,B,C OF AS SHOWN IN CONNECTING CIRCUIT. ~~ALSO PROVIDE 115A AND 320A TUBES.~~
113. FURNISH FIGS. I AND B WITH "X" WIRING WHEN AMP - RECT IS USED WITH A MICHEL 941 OR 240 TYPE OR PROJECTION TYPE METER. FURNISH FIGS. I AND E WITH "X" WIRING WHEN AMP-RECT IS USED WITH A RECORDING METER.
114. IN 40-WATT INSTALLATIONS USE FIG. E. IN 24-VOLT INSTALLATIONS, USE FIG. B. TYPE 320A AND 320A TUBES SHALL BE USED FOR 24 AND 40-VOLT BATTERY.
115. IF NECESSARY, REMOVE THE Z STRAP FROM RESISTORS "A" AND "B" AND ADJUST RESISTORS "A" AND "B" TO OBTAIN ± 1.0 VOLT BETWEEN PIN 1 OF TUBE 1 AND PIN 5 OF TUBE 2 WHEN THE FILAMENT SUPPLY VOLTAGE IS 24 OR 40 ± 1.0 VOLTS.

116. PRIOR TO ISSUE 15B, OPTION W WAS
PART OF OPTION Z.

CAUTION NOTE:
2A1. WHEN AEROSOL CAPACITORS EEM OR 2EM AND
EE OR 2E ARE REPLACED BY K54257,LI AND
K54789,LI CAPACITORS RESPECTIVELY,
AN APPLIQUE PLATE (841045263 BRACKET)
MUST BE OBTAINED.

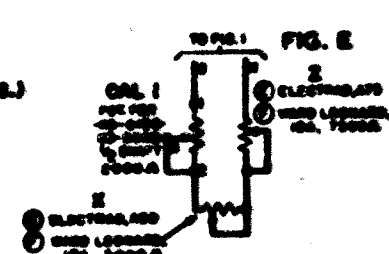

NOTICE
NOT FOR USE OR
ENCLOSURE OUTSIDE
WE OR BFL
EXCEPT UNDER
WRITTEN AGREEMENT

10-10-24 1
10-10-24 1

168

1992年12月 第10卷第12期 第1192-1193页 中国地质大学(北京)学报

TELL JACOB
TERMINATION REQUIRED
IN APPROX. SECTION
LATE NIGHT SUPPLY

姓名: _____
 学号: _____

SECRET