

1	1	20	APP. 2	30	APP.

PRINTED IN U.S.A.

FIG. 1
PREPAYMENT COIN BOX TRUNKS
MESSAGE RATE TRUNK OR AUX LINE ALARM
TIMING AND ALM CKT OR TIMING CKT ASSOCIATED
WITH 65 VOLT DRY CELL ALARM CKT (SEE NOTES 103 & 106)
ONE PER OFFICE

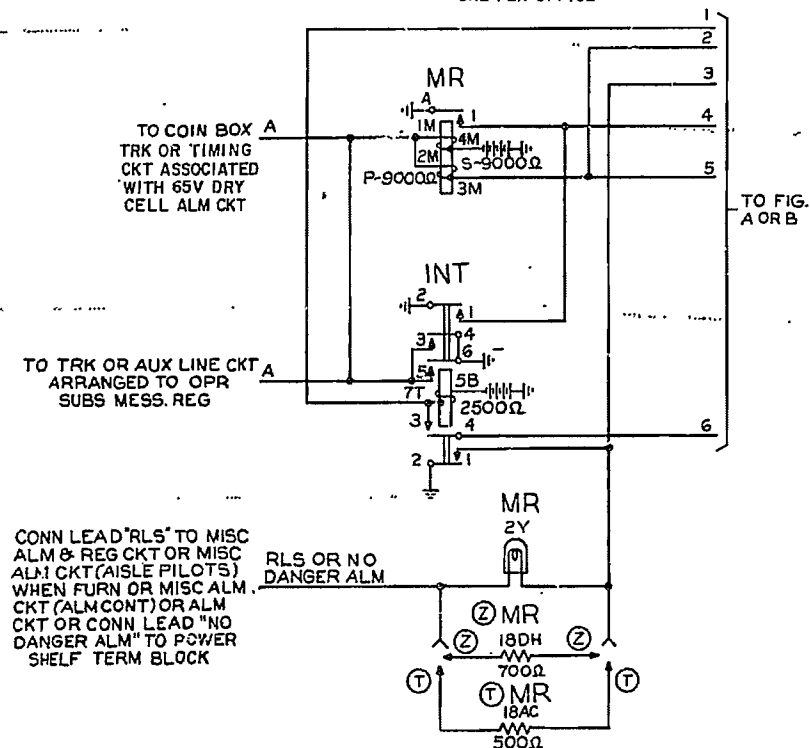


FIG. 2
ALARM AND PILOT RELAY FOR FINDERS
FOR USE WITH OR WITHOUT AISLE PILOT
LAMPS ONE PER FRAME
("MFR DISC" FOR 22 POINT TRUNK FINDERS)

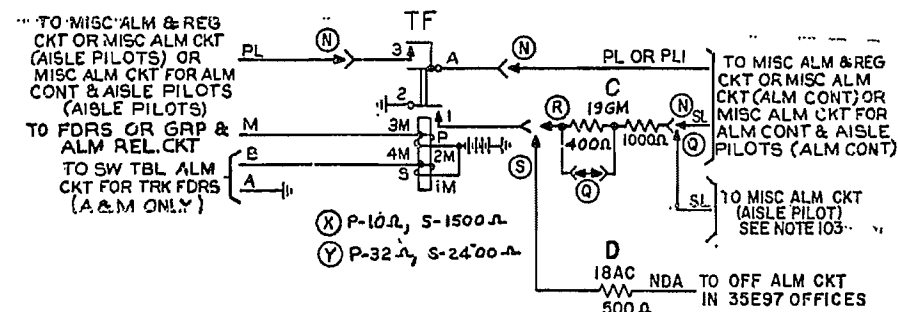


FIG. A


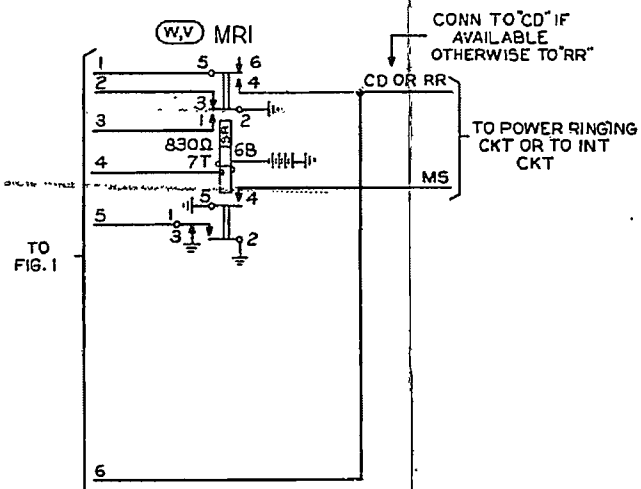


FIG. B

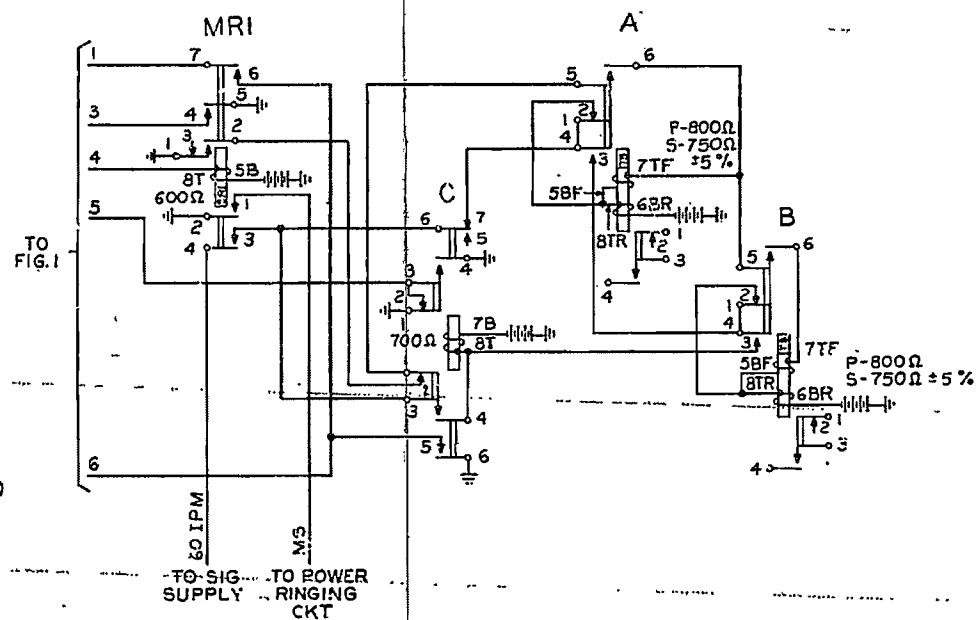

SD-31978-01-2

MISCELLANEOUS ALARM CIRCUIT

②

SD-31978-01-2

BELL TELEPHONE LABORATORIES
INCORPORATED

65

PRINTED IN U.S.A.

CIRCUIT REQUIREMENTS

[illegible]

1. R 5-6T & 3-4B ONLY
2. UD GAPS OF 1T & 1B SHALL BE PERCEPTIBLE
w/ 5-6T & 3-4B MAY MAKE.
3. ADJACENT RELAYS SHALL NOT BE ENERGIZED.
SEE BSP.
4. FOR FIG. A, INSULATE 3T, 1B(MR1) FOR FIG. B,
INSULATE 2T (C),
5. CONTACT MAKE-READJUST & TEST 4.
6. PRIOR TO ISSUE 14B, THE ARMATURE TRAVEL WAS
SHOWN AS 49.

ISSUE HW
16B

SD-31978-01-3

65

PRINTED IN U. S. A.

TCI Library www.telephonecollectors.info

FIG. 51 (MFR DISC)
(FOR FIG. 1 & A)
355A & 35-E-97

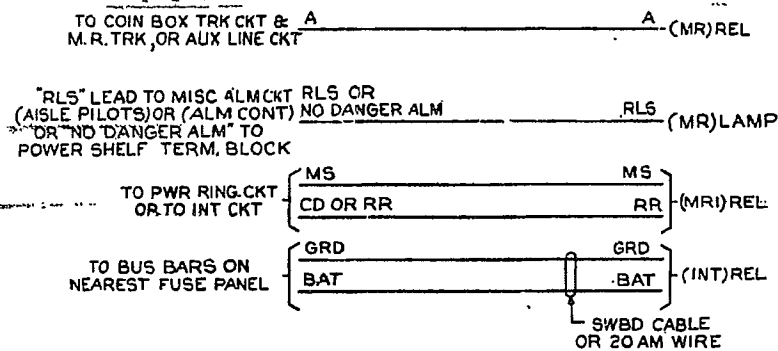


FIG. 52
(FOR FIG. 2)
355A
(SEE NOTE 103)

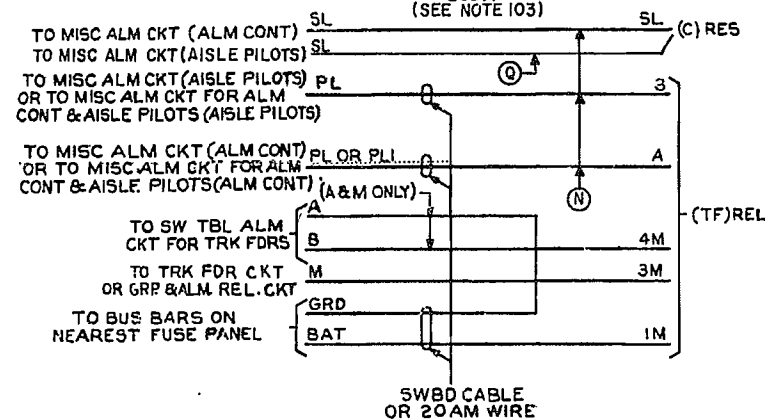


FIG. 53 (MFR DISC)
(FOR FIG. 1)
355A OR 356A

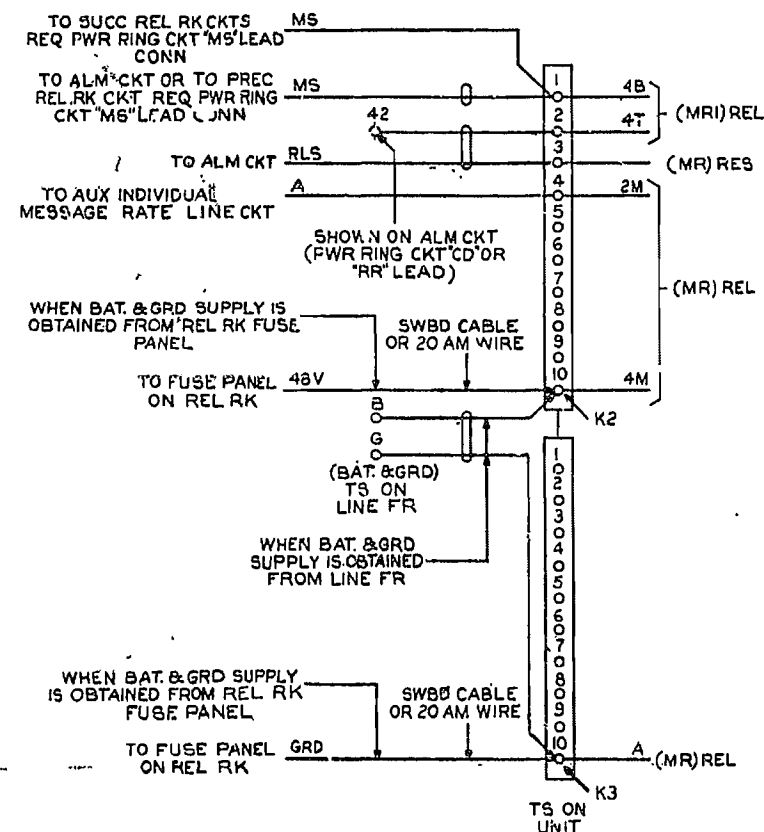


FIG. 54
(FOR FIGS. 1 & A)
355A OR 356A OR 35-E-97
(SEE NOTE 106)

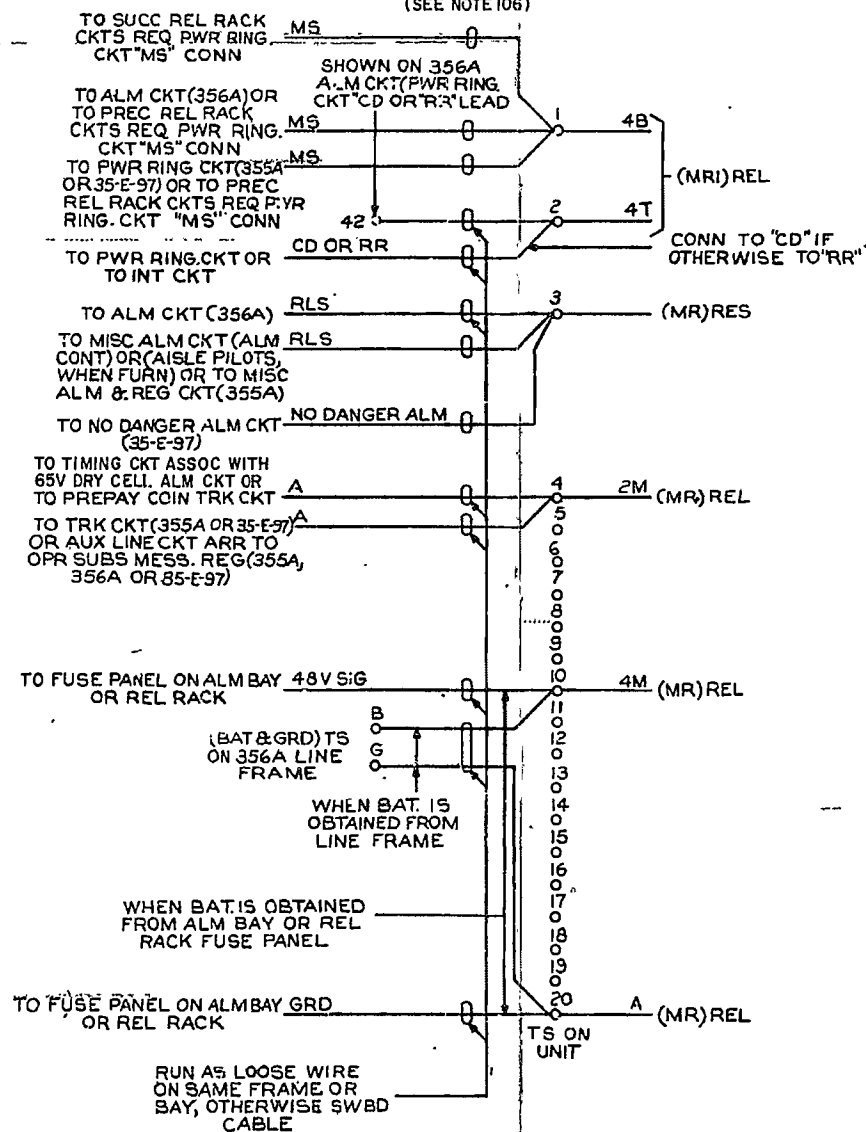


FIG. 55 (A & M ONLY)
(FOR FIG. 1 & B)
360A


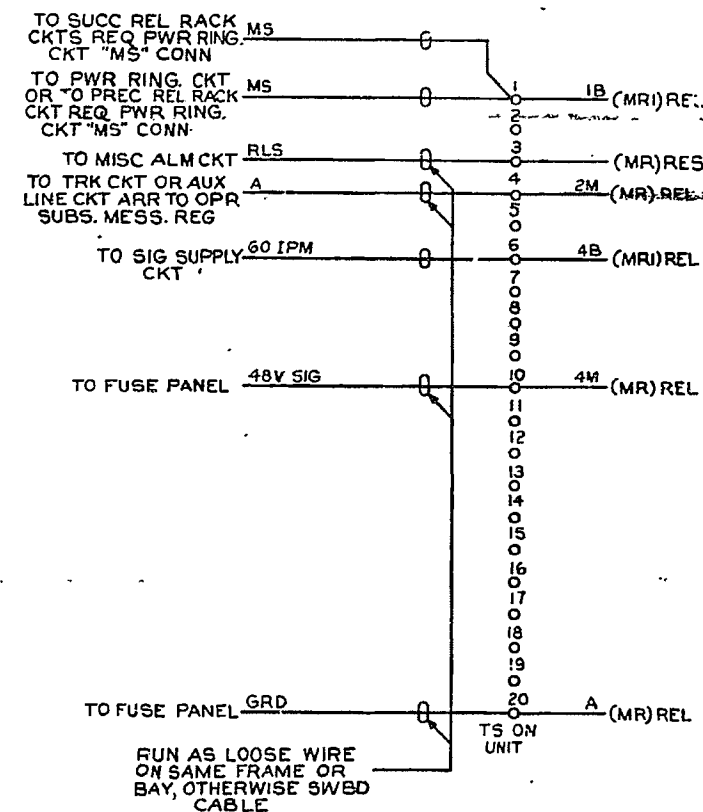


FIG. 56 (A & M ONLY)
(FOR FIG. 2)
NO. 35E97 OFFICES

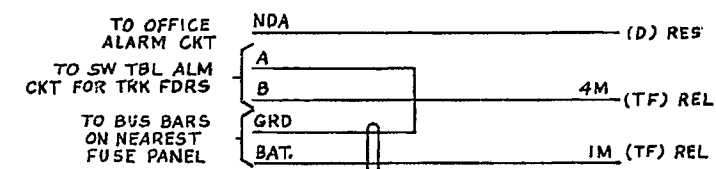

SD-31978-01-4

MISCELLANEOUS ALARM CIRCUIT		2	SD-31978-01-4
BELL TELEPHONE LABORATORIES INCORPORATED		6S	PRINTED IN U.S.A.