

CONNECTIONS

TABLE A

TELEPHONE SET MODIFICATIONS

To provide set with A lead control or busy lamp, cutoff of ringer in set, ringer used as common or private line ringer.

EXTERNAL MOUNTING CORD CONNECTIONS						EXCLUSION KEY LEADS				RINGER LEADS			
R	G	Y	BK	BL	W	(Y) [R-Y]	(BK) [G-Y]	BL	W	R	BK	S	S-R
Ring	Tip	R1	B1	A- BL	A1- GRD	4	3	E2	3	E1	4	K*	A

* For common or private line ringer without condenser, move (S) ringer lead to A.

TABLE B

POLARITY GUARD CONNECTIONS (P-90D052 GUARD ASSEMBLY)

LEAD		REMOVE FROM	CONNECT TO	
		NET.	NET.	POLARITY GUARD
Dial	BK	RR		T
Line Switch	(W) [S-BR]	C		S
Polarity Guard	G W		RR C	

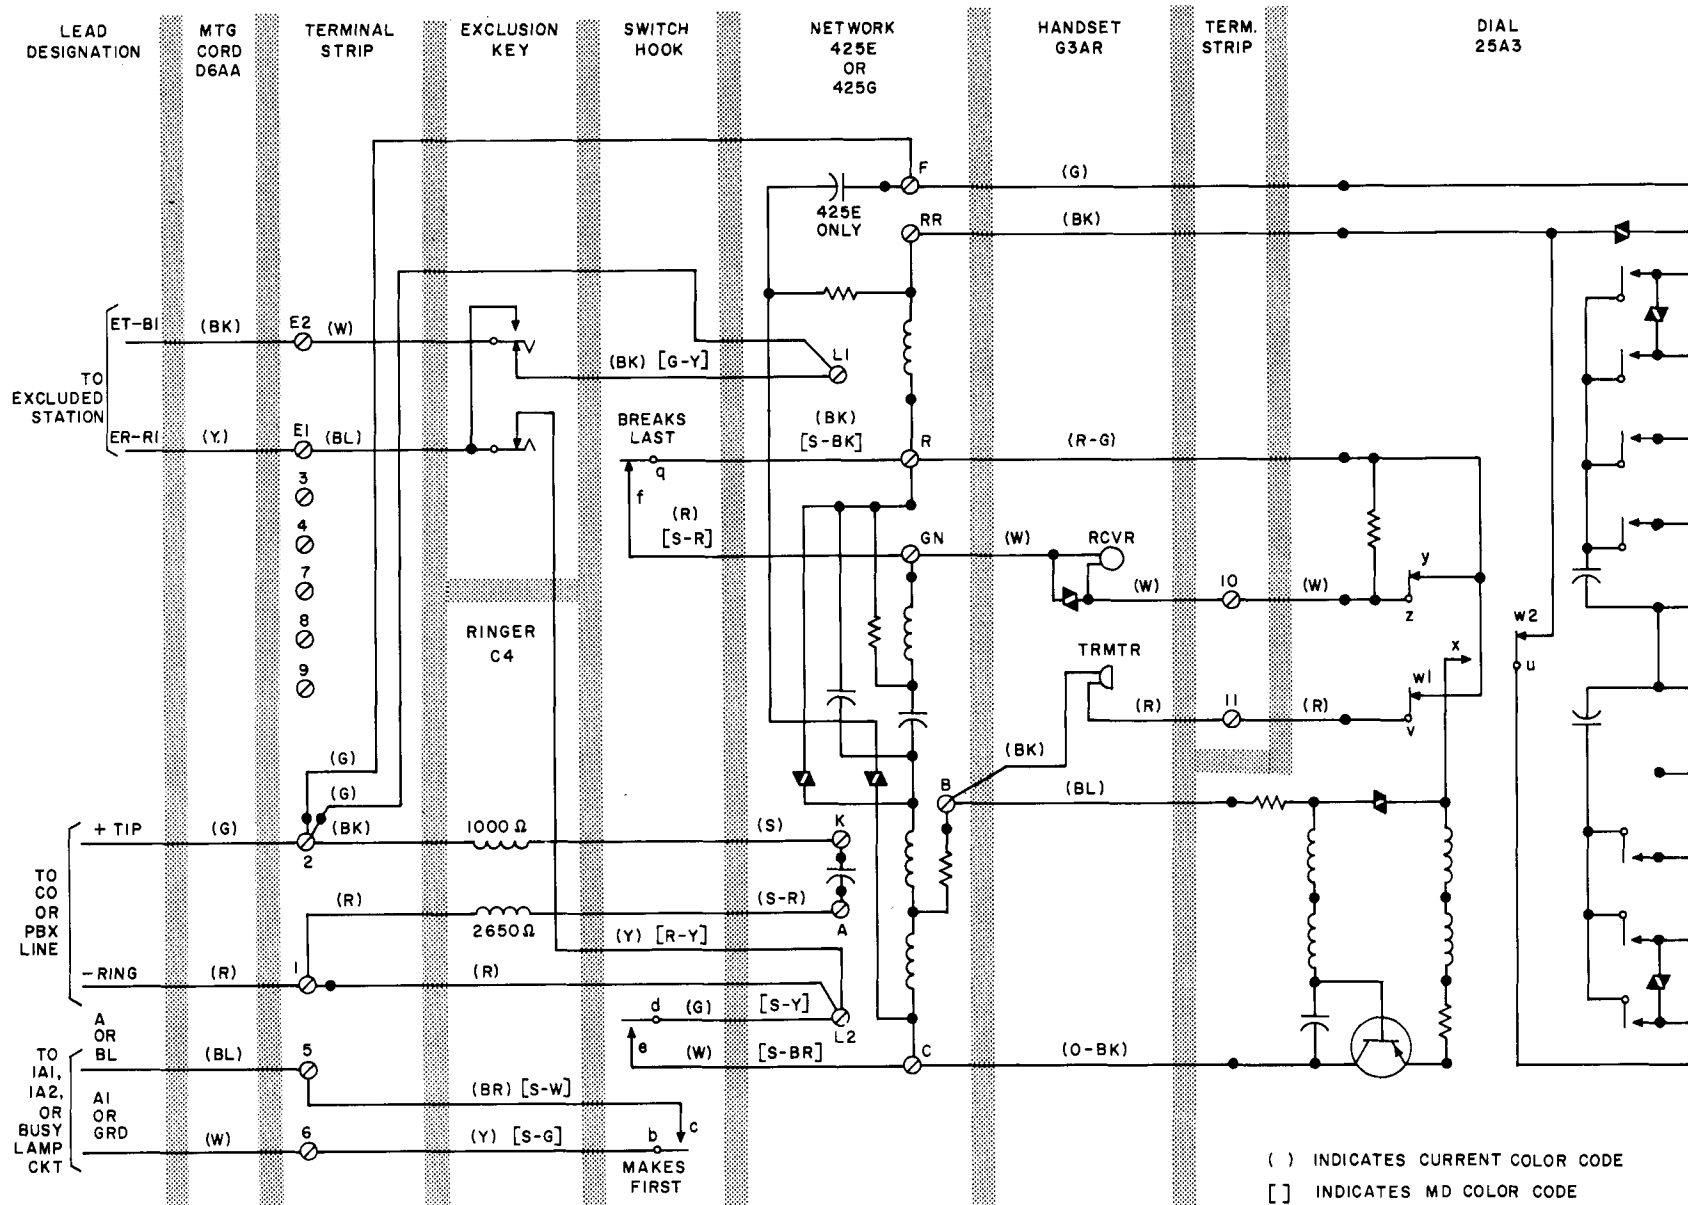


Fig. 1 — 1502B Telephone Set With 25A3 Dial

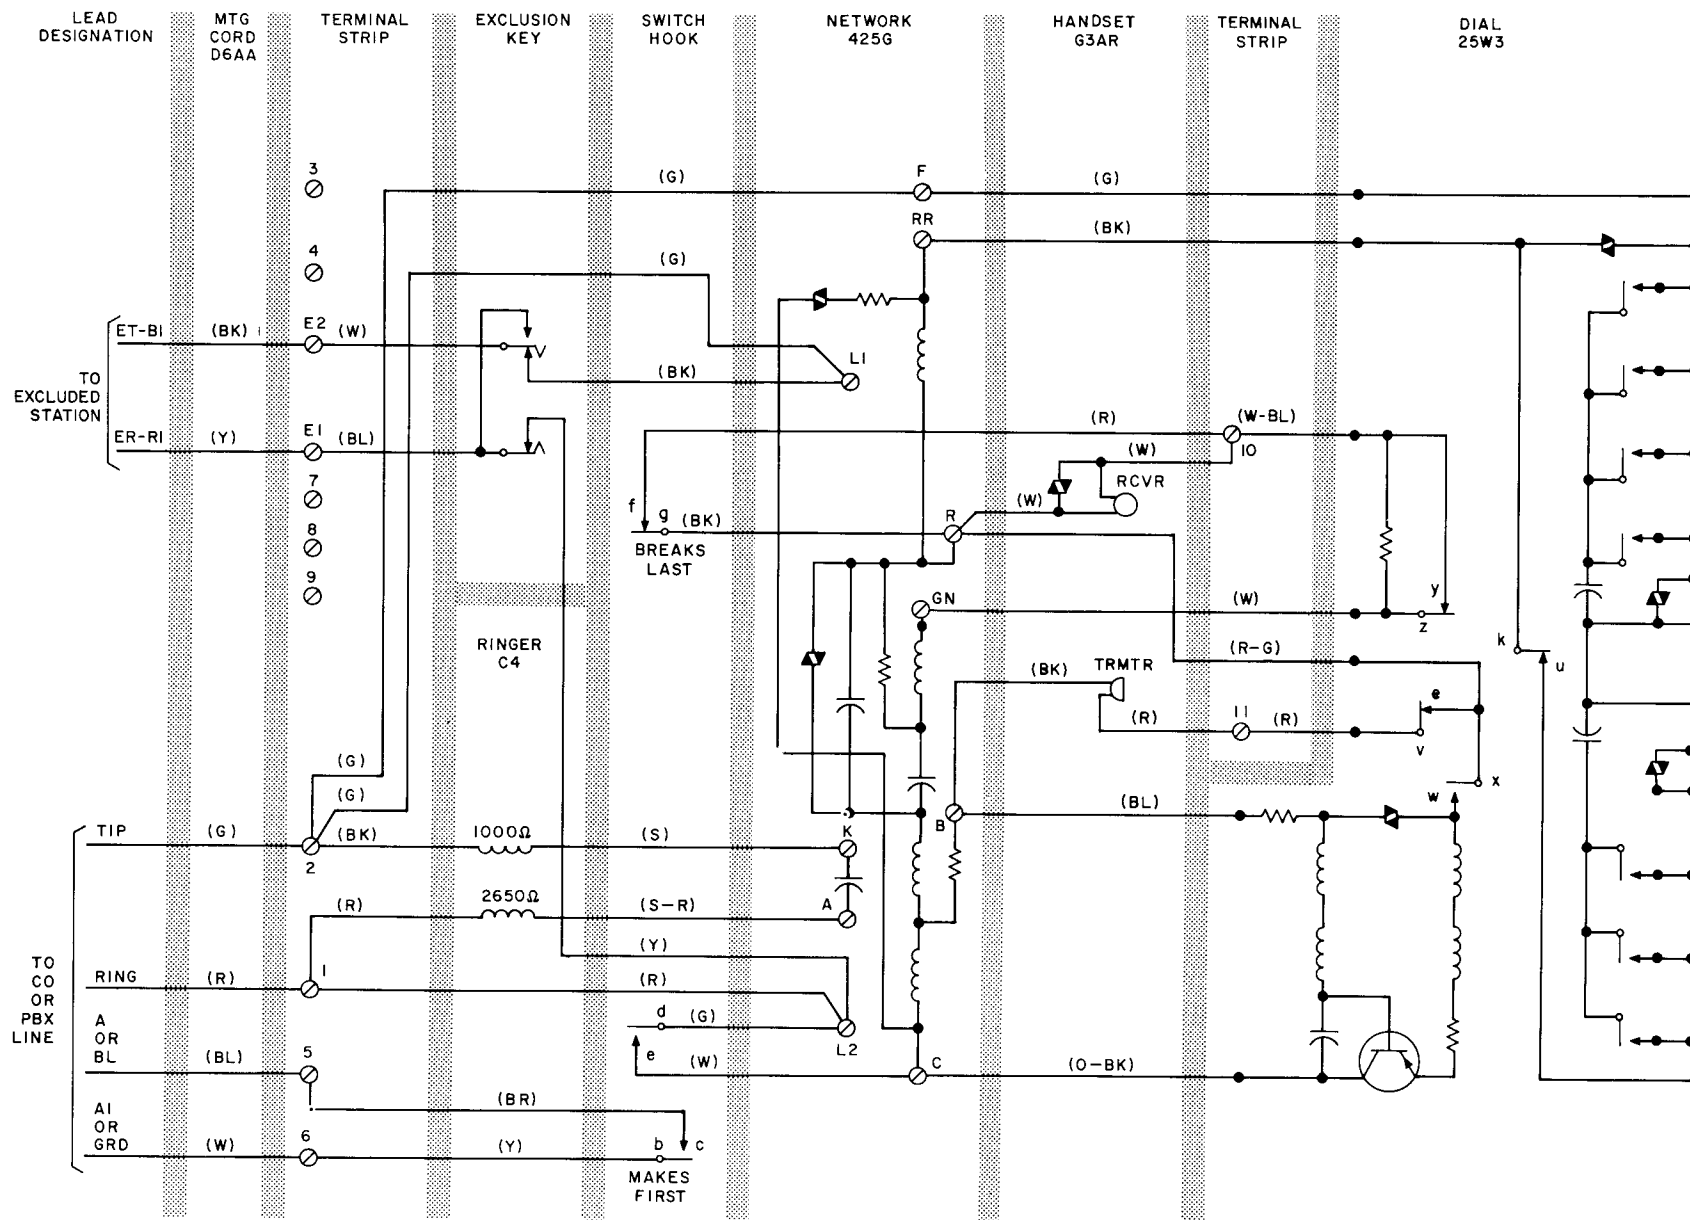


Fig. 2 — 1502B Telephone Set With 25W3 Dial