

CONNECTIONS

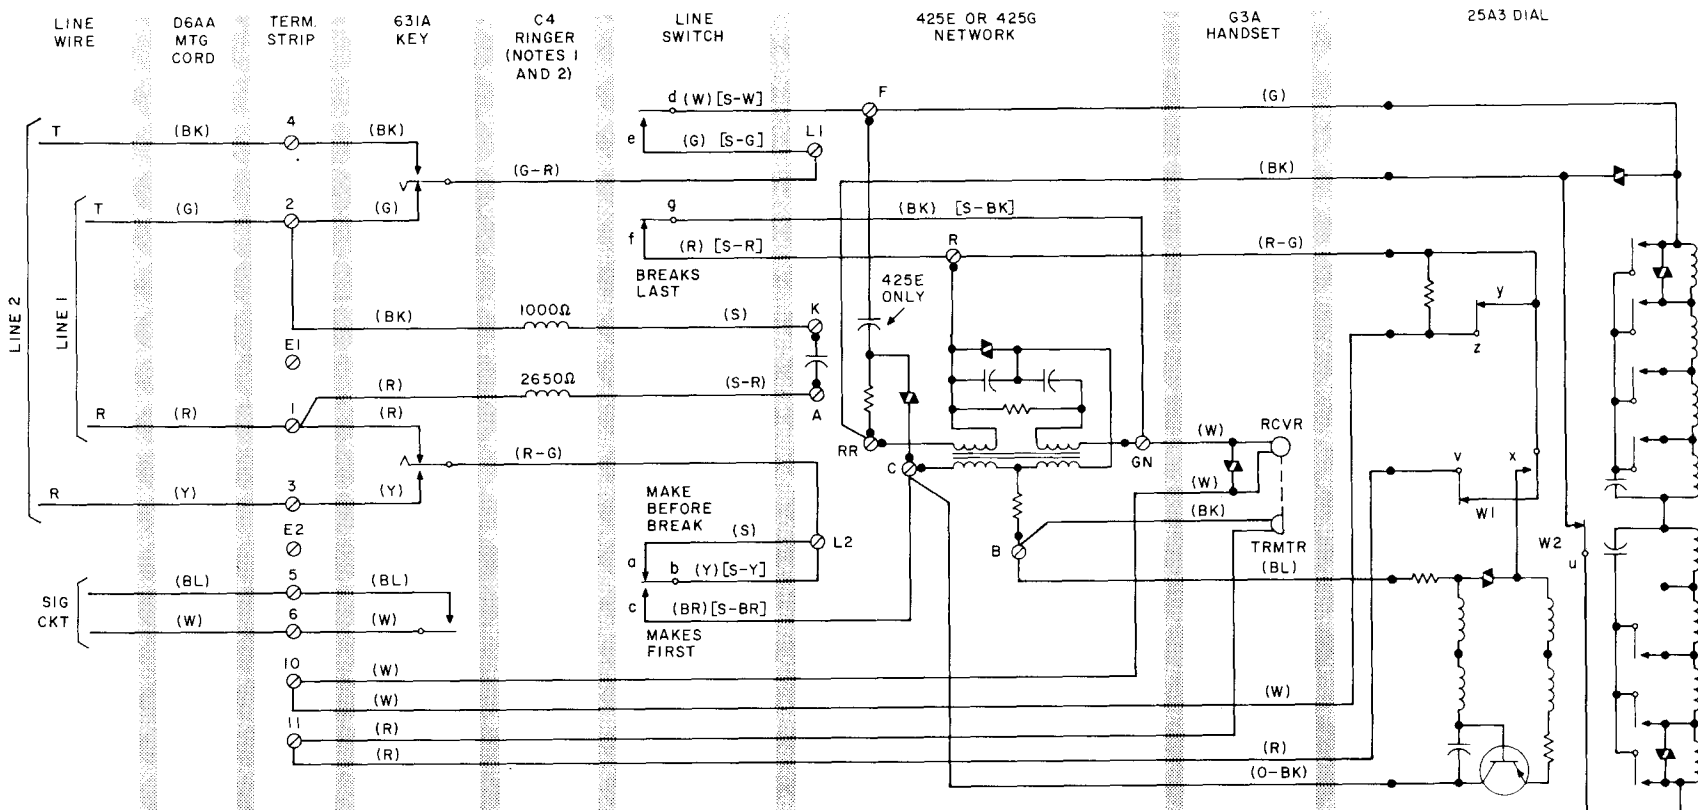


TABLE A

POLARITY GUARD CONNECTIONS
(P-90D052 GUARD ASSEMBLY)

LEAD		REMOVE FROM	CONNECT TO
		NET.	NET. POLARITY GUARD
Dial	BK	RR	T
Line Switch	(BK) [S-BR]	C	S
Polarity Guard	G		RR
	W		C


() CURRENT COLOR CODE
[] MD COLOR CODE

NOTES:

1. CONNECTIONS SHOWN ARE FOR RINGING ON LINE 1. TO RING ON LINE 2, MOVE (R) AND (BK) RINGER LEADS TO TERMINALS 3 AND 4. TO SILENCE RINGER, CONNECT (BK) TO K TERMINAL.
2. WHERE COMMON OR PRIVATE LINE RINGER IS REQUIRED, CONNECT:
 - (BL) AND (W) CORD LEADS TO E1 AND E2.
 - (R) AND (BK) RINGER LEADS TO E1 AND E2.
 - (S-R) RINGER LEAD TO A.

Fig. 1 - 1510F Telephone Set. With 25A3 Dial,


2-Line Pickup and Signaling, Connections

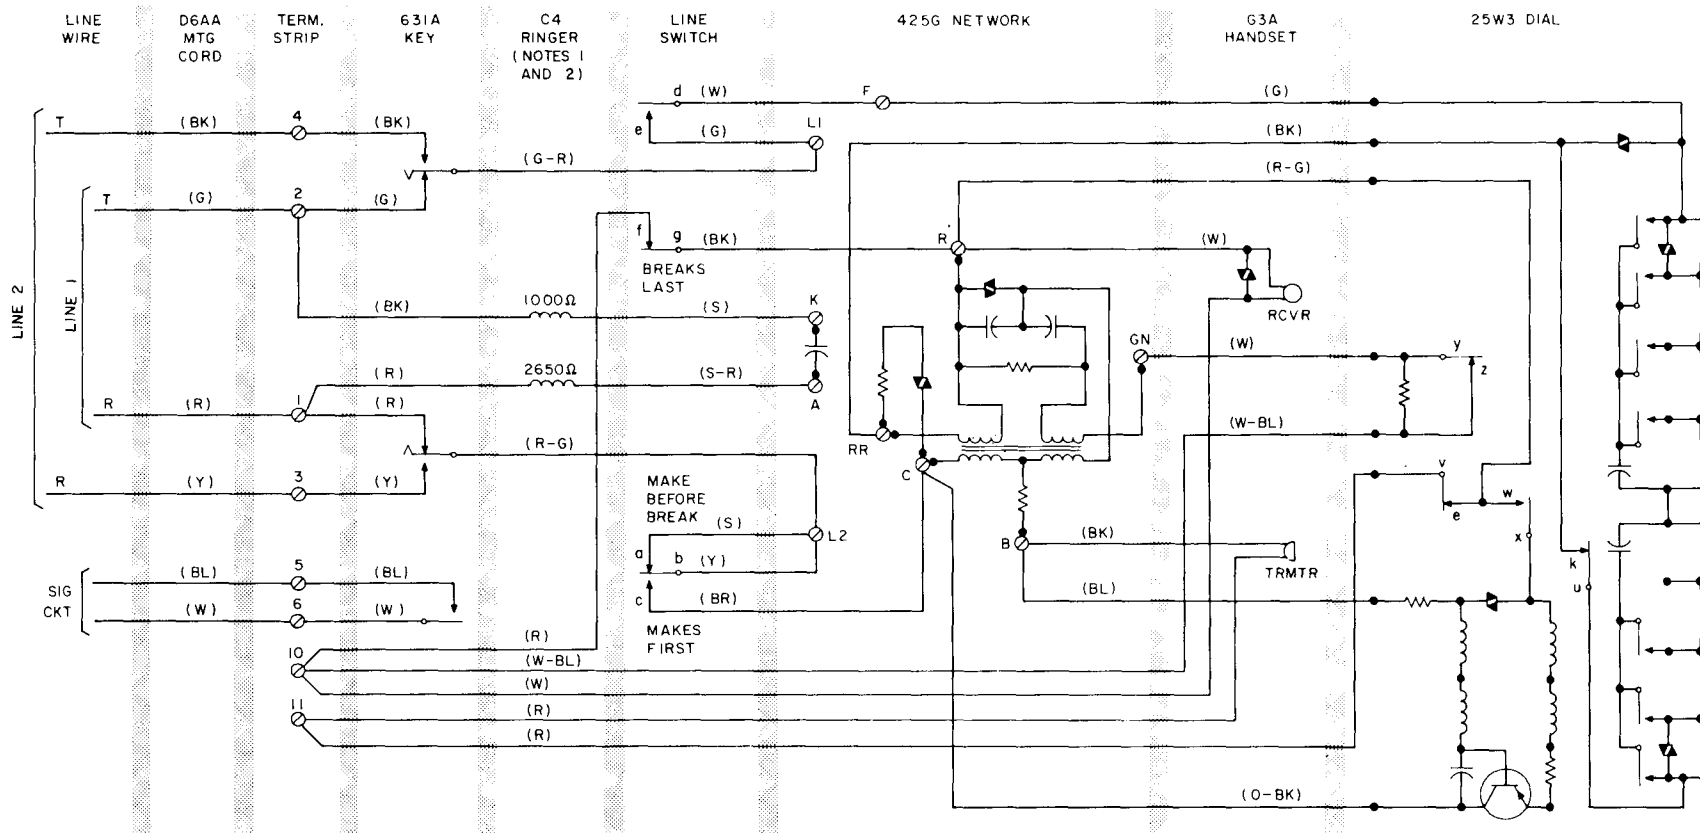

NOTES:

1. CONNECTIONS SHOWN ARE FOR RINGING ON LINE 1.
TO RING ON LINE 2, MOVE (R) AND (BK) RINGER
LEADS TO TERMINALS 3 AND 4. TO SILENCE RINGER,
CONNECT (BK) TO K TERMINAL.
2. WHERE COMMON OR PRIVATE LINE RINGER IS REQUIRED, CONNECT:
 - (BL) AND (W) CORD LEADS TO E1 AND E2
 - (R) AND (BK) RINGER LEADS TO E1 AND E2
 - (S-R) RINGER LEAD TO A

Fig. 2—1510F Telephone Set, With 25W3 Dial, 2-Line Pickup and Signaling, Connections

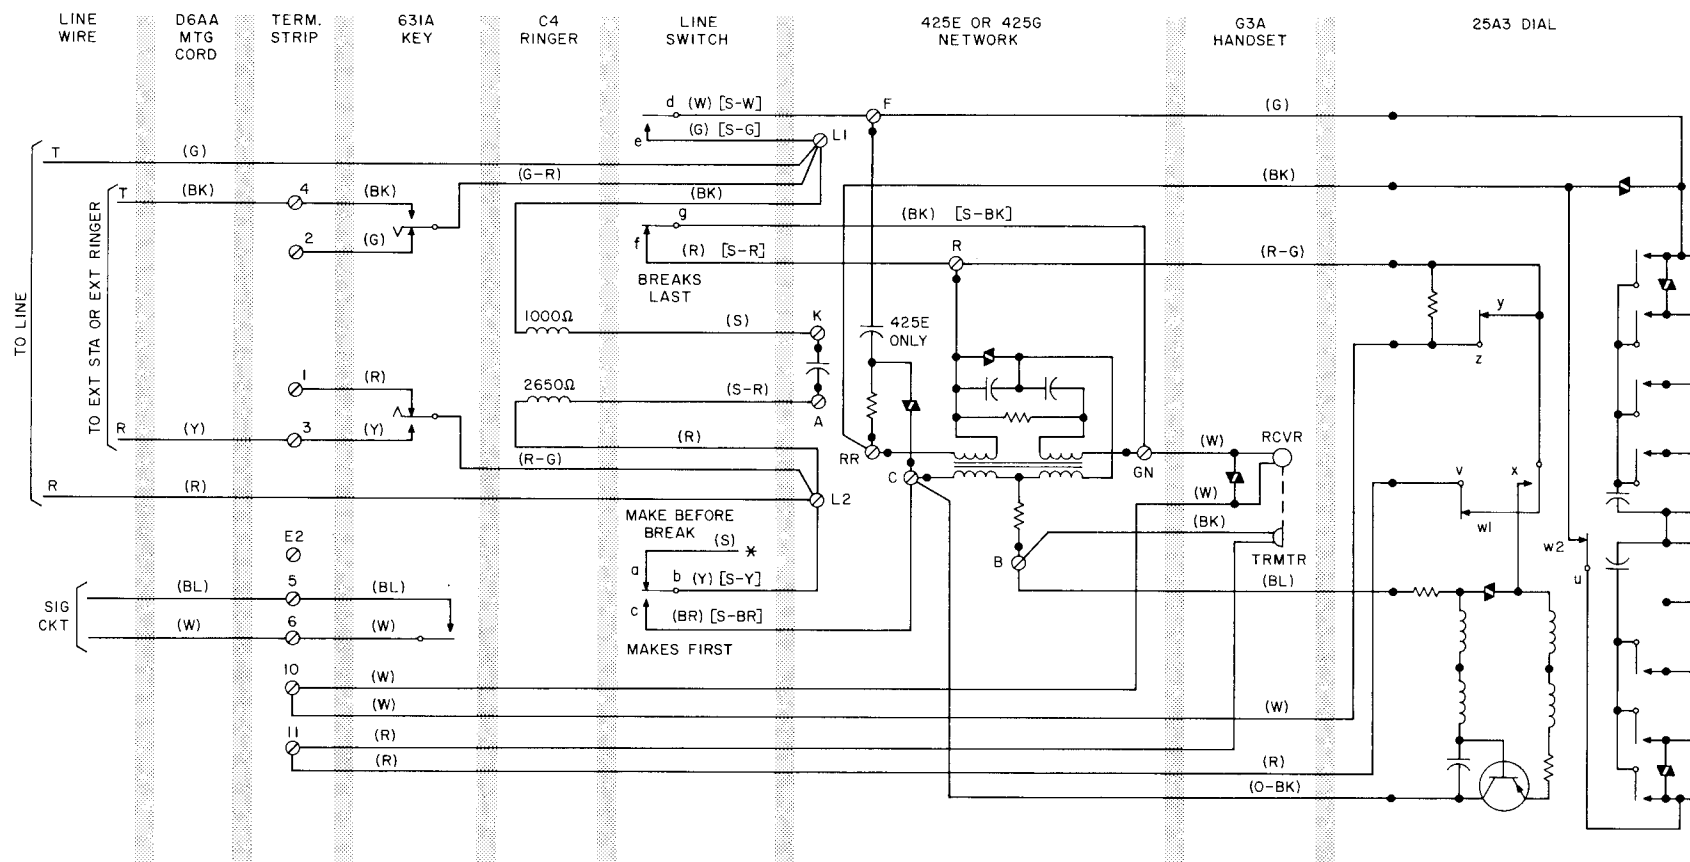

() CURRENT COLOR CODE
 [] MD COLOR CODE

Fig. 3—1510F Telephone Set, With 25A3 Dial, Line Pickup, Cutoff of Extension Station or Ringer and Signaling

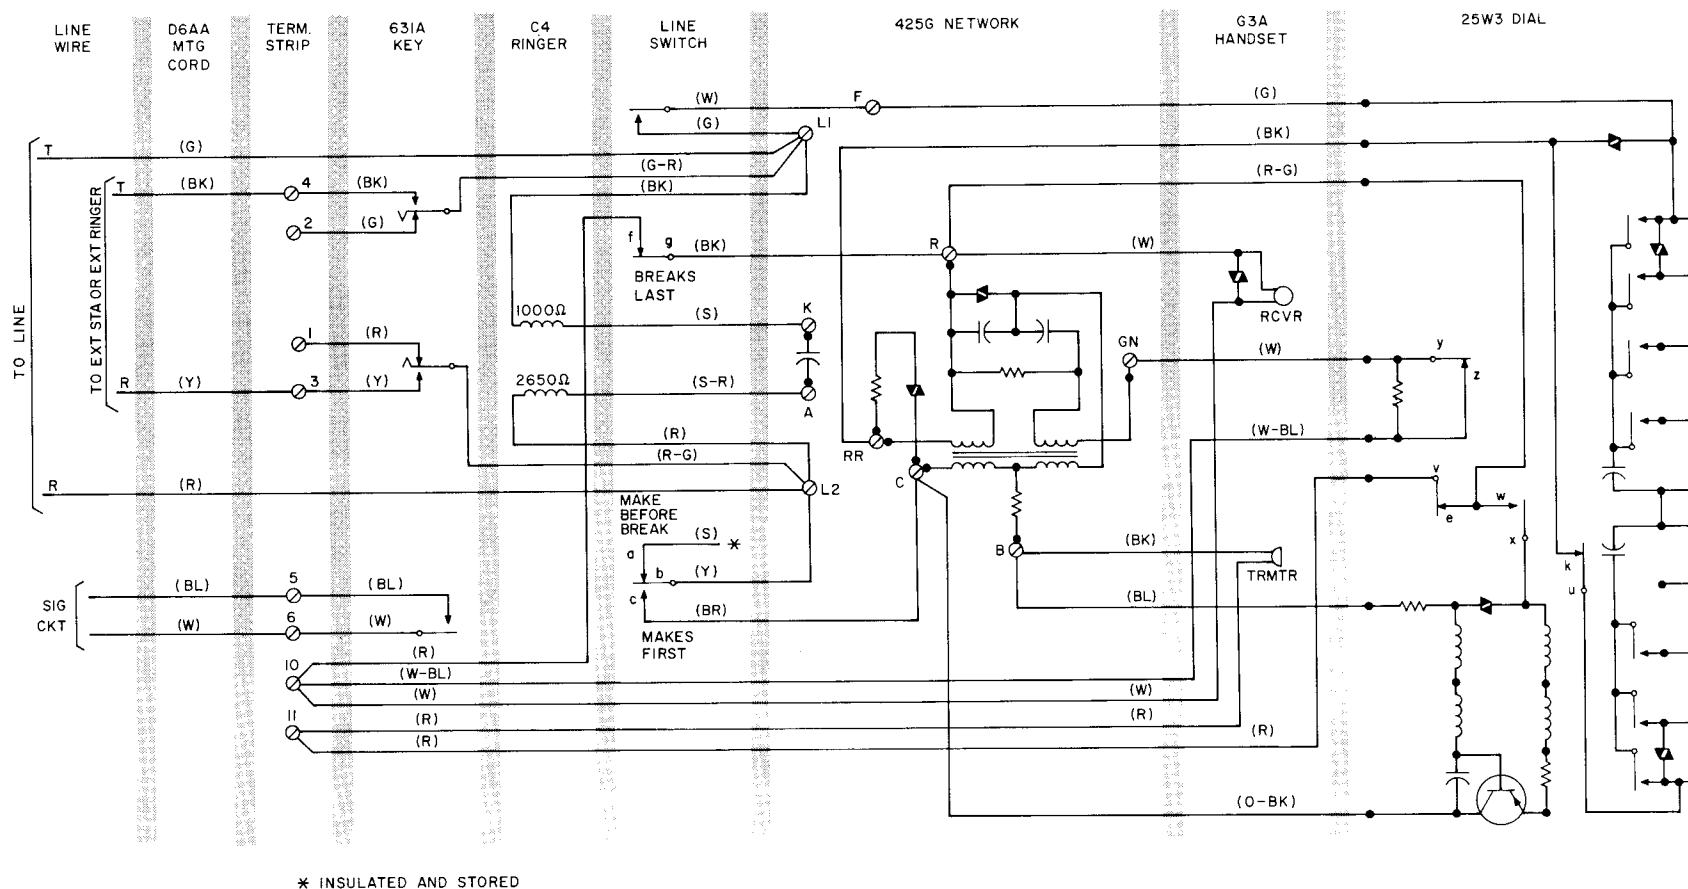


Fig. 4—1510F Telephone Set, With 25W3 Dial, Line Pickup, Cutoff of Extension Station or Ringer and Signaling