

SERVICE
2515B AND 2515BM TELEPHONE SETS

1. GENERAL

1.01 Reissued to:

- Add D6AL or D6AP mounting cord and 623D6 jack, Fig. 2
- Show 2515B telephone set MD, Fig. 1.

PLEASE NOTE:

FOREMAN 02.....
FOREMAN 03.....
FOREMAN 04.....
FOREMAN 05.....
FOREMAN 06.....
FOREMAN 07.....
FOREMAN 08.....
FOREMAN 09.....
FOREMAN 10.....
DISTRICT.....

TABLE A
POLARITY GUARD CONNECTIONS
[819040528 (P-90D052) GUARD ASSEMBLY]

LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	POLARITY GUARD
Dial	BK	RR		T
Line Switch	BR	C		S
Polarity Guard	G		RR	
	W		C	

Note: For use when specified by local instructions for end-to-end signaling installation.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement


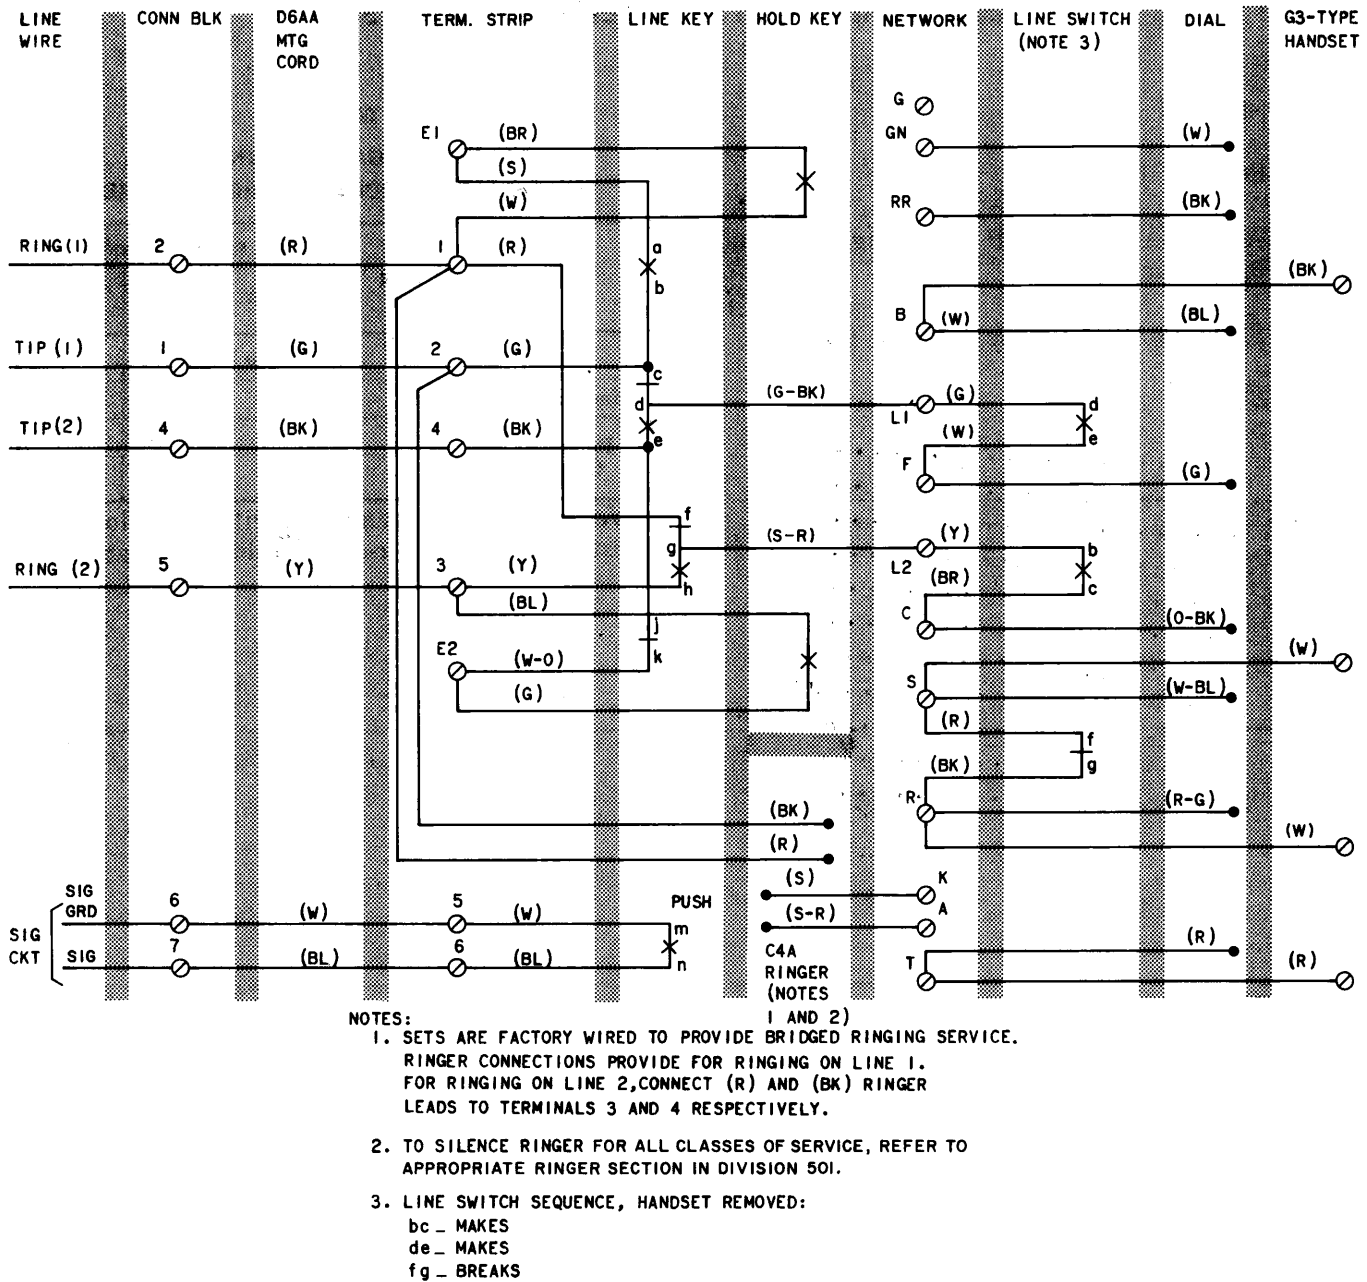


Fig. 1—2515B (MD) Telephone Set Connections, 2-Line Pickup, Hold, and Signaling (Factory Wired)

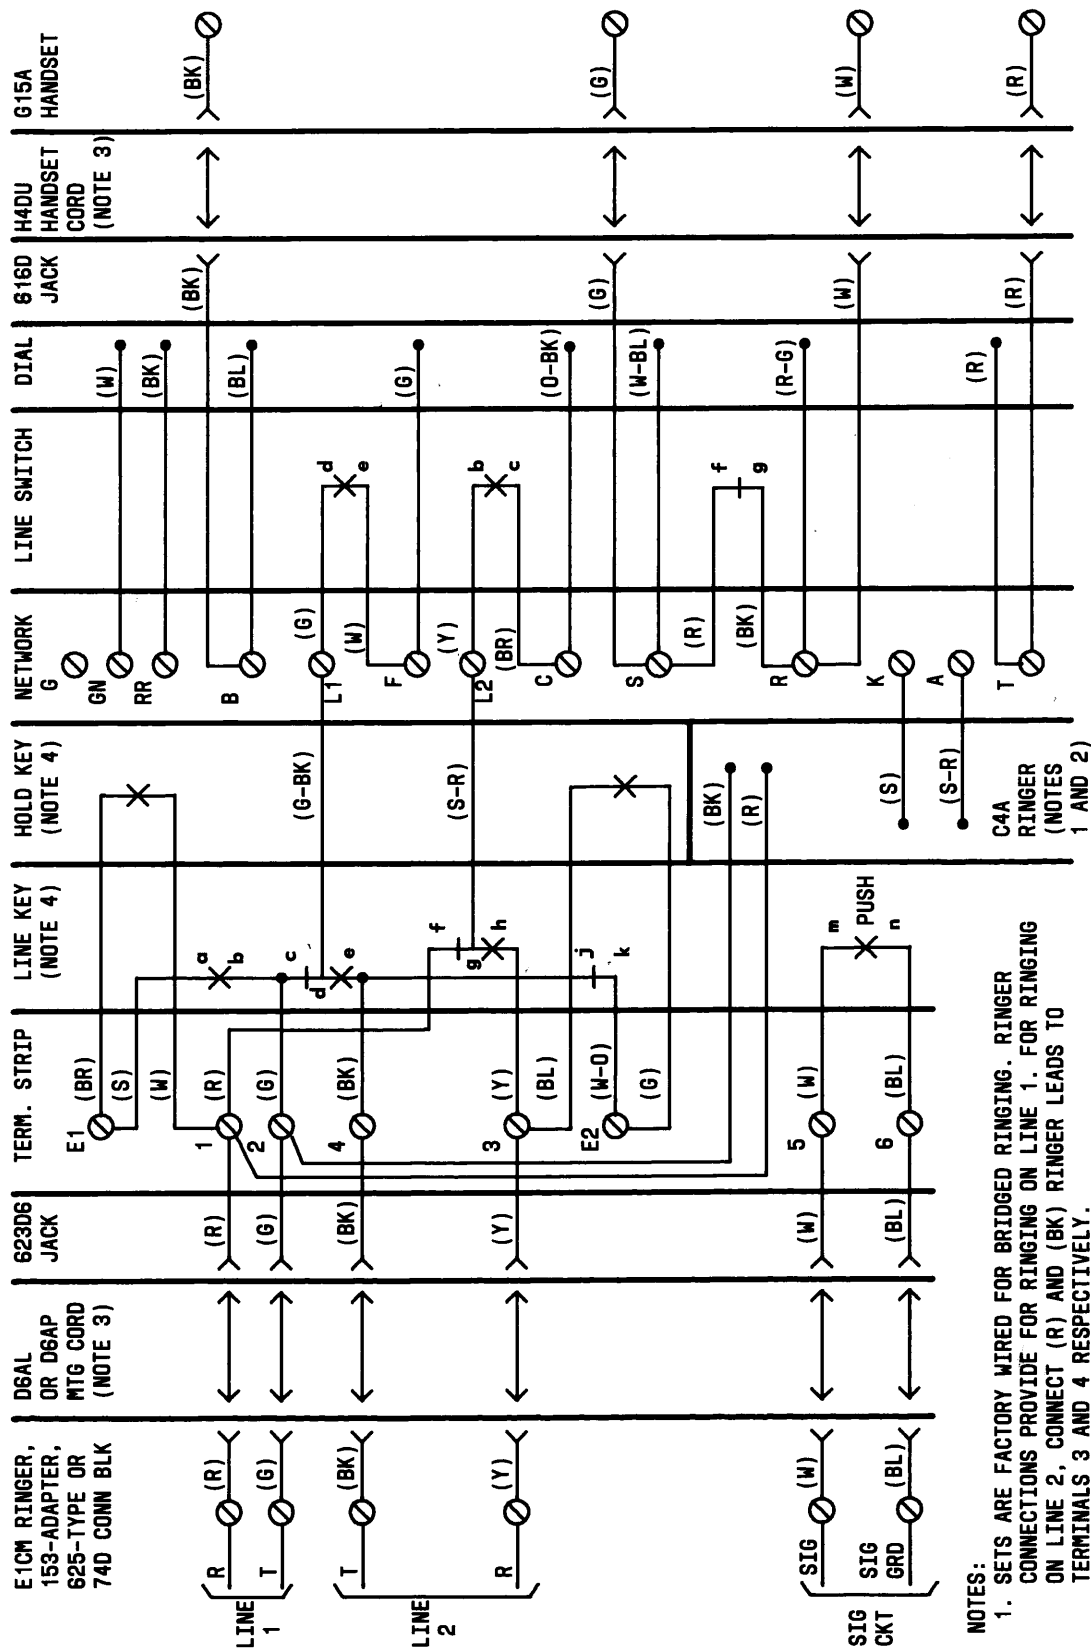

NOTES:

- SETS ARE FACTORY WIRED FOR BRIDGED RINGING. RINGER CONNECTIONS PROVIDE FOR RINGING ON LINE 1. FOR RINGING ON LINE 2, CONNECT (R) AND (BK) RINGER LEADS TO TERMINALS 3 AND 4 RESPECTIVELY.
- TO SILENCE RINGER FOR ALL CLASSES OF SERVICE REFER TO APPROPRIATE RINGER SECTION IN DIVISION 501.
- MUST BE ORDERED SEPARATELY.

- SUBSCRIBER INSTRUCTION BOOKLET SIB-2430 SHIPPED LOOSE WITH SET SHOULD BE EXPLAINED AND LEFT WITH CUSTOMER FOR PROPER OPERATION OF LINE AND HOLD KEY.

Fig. 2—2515BM Telephone Set Connections, 2-Line Pickup, Hold, and Signaling (Factory Wired) 4