

SERVICE 2526B TELEPHONE SETS

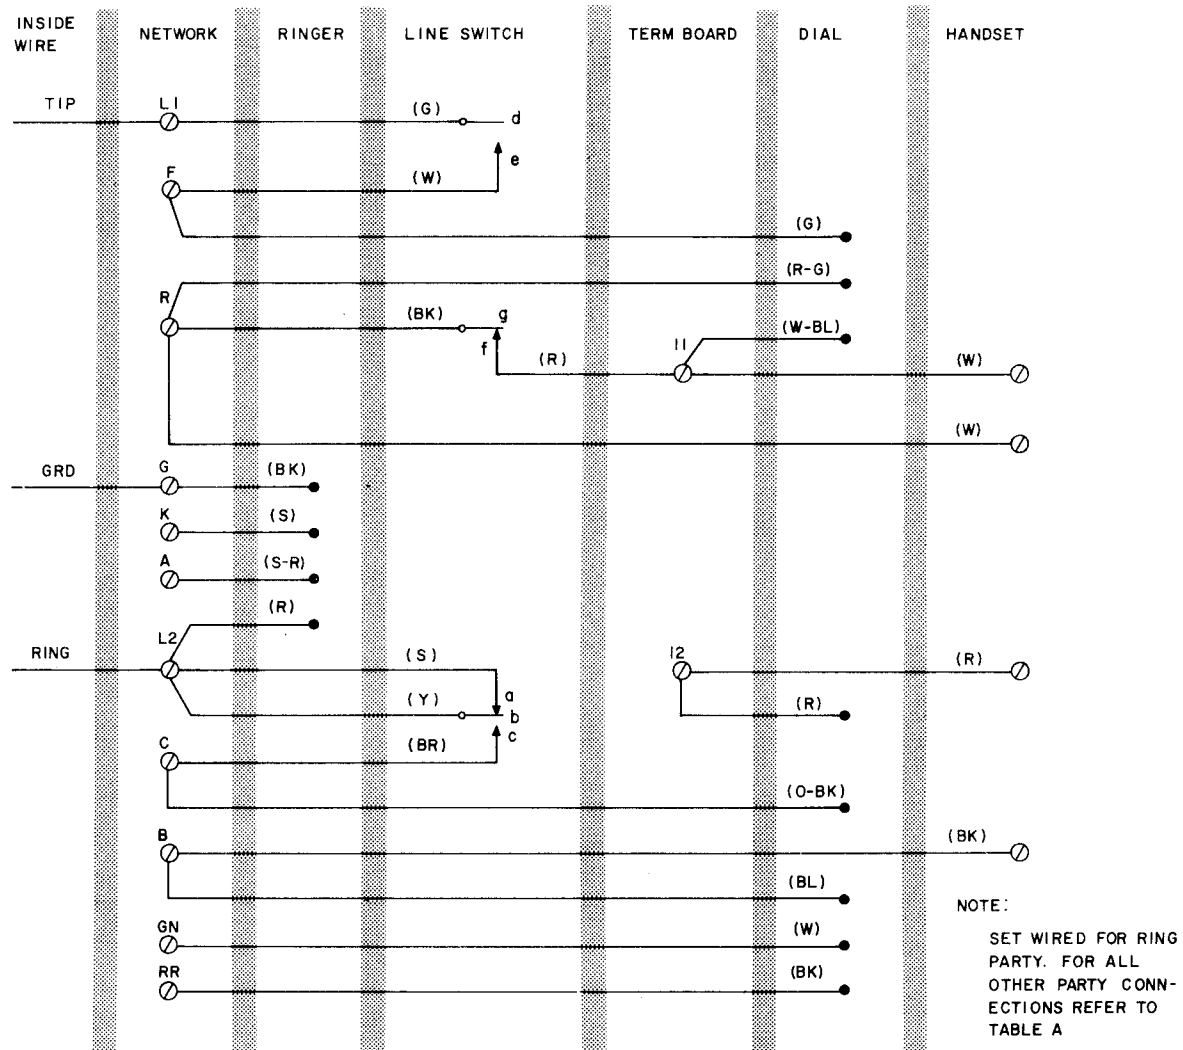


Fig. 1—2526B Telephone Set, Connections

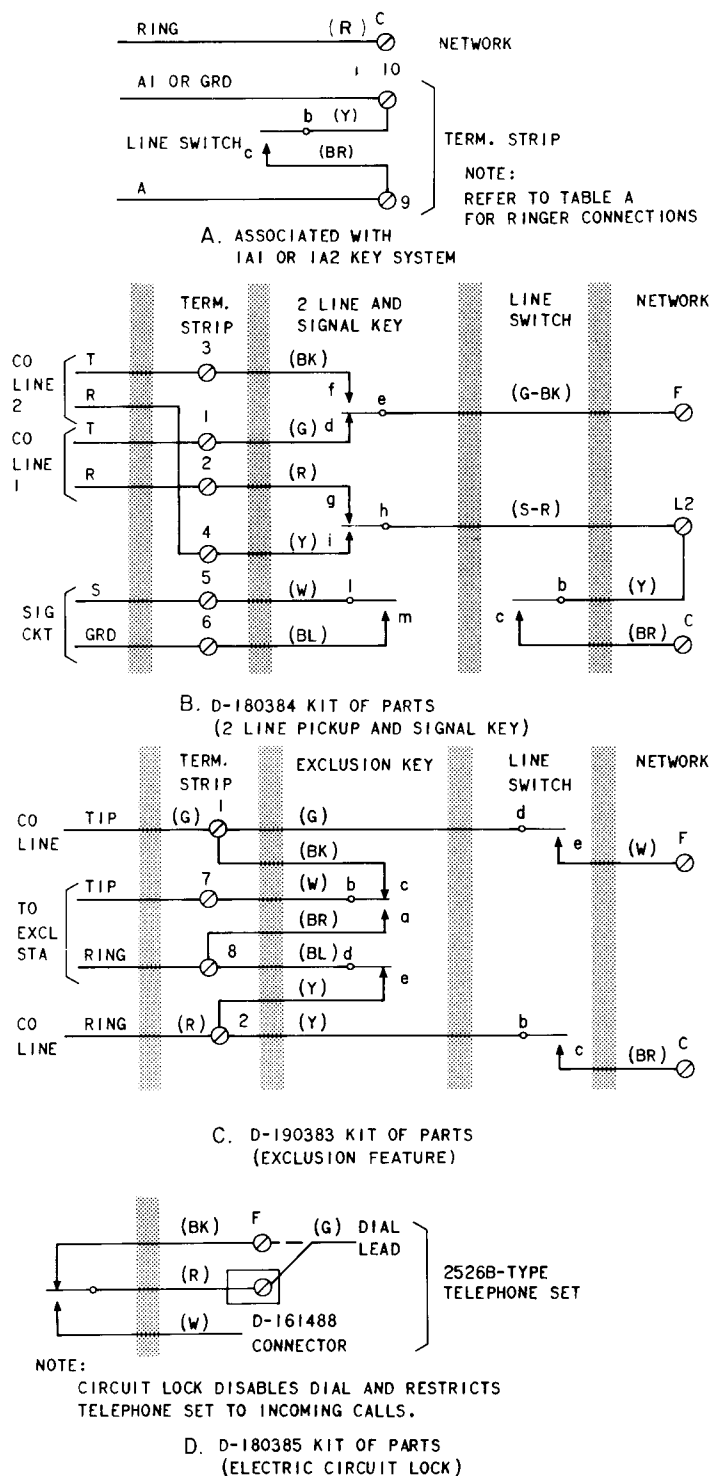


TABLE A

RINGER CONNECTIONS

WIRE OR LEAD	COLOR	INDIV. OR BRIDGED	TIP PARTY	TIP PARTY	
				INDENT. GROUND	
				1000Ω	2650Ω
Ringer Leads	R	L2*	L1	K	G
	BK	L1	G	G	K
	S	K	K	B	B
	S-R	A	A	B	B
Line Switch	S	L2	L2	A	A

* Terminate (R) ringer lead on C of network when associated with 1A1 or 1A2 key system.

TABLE B

POLARITY GUARD CONNECTIONS
(P-90D061 GUARD ASSEMBLY)

LEAD		REMOVE FROM	CONNECT TO	
		NET.	NET.	POLARITY GUARD
Dial	BK	RR		T
Line Switch	BR	C		S
Polarity Guard	G W		RR C	

Note: For use when specified by local instruction for end-to-end signaling installation.

Fig. 2—Optional Feature, Connections

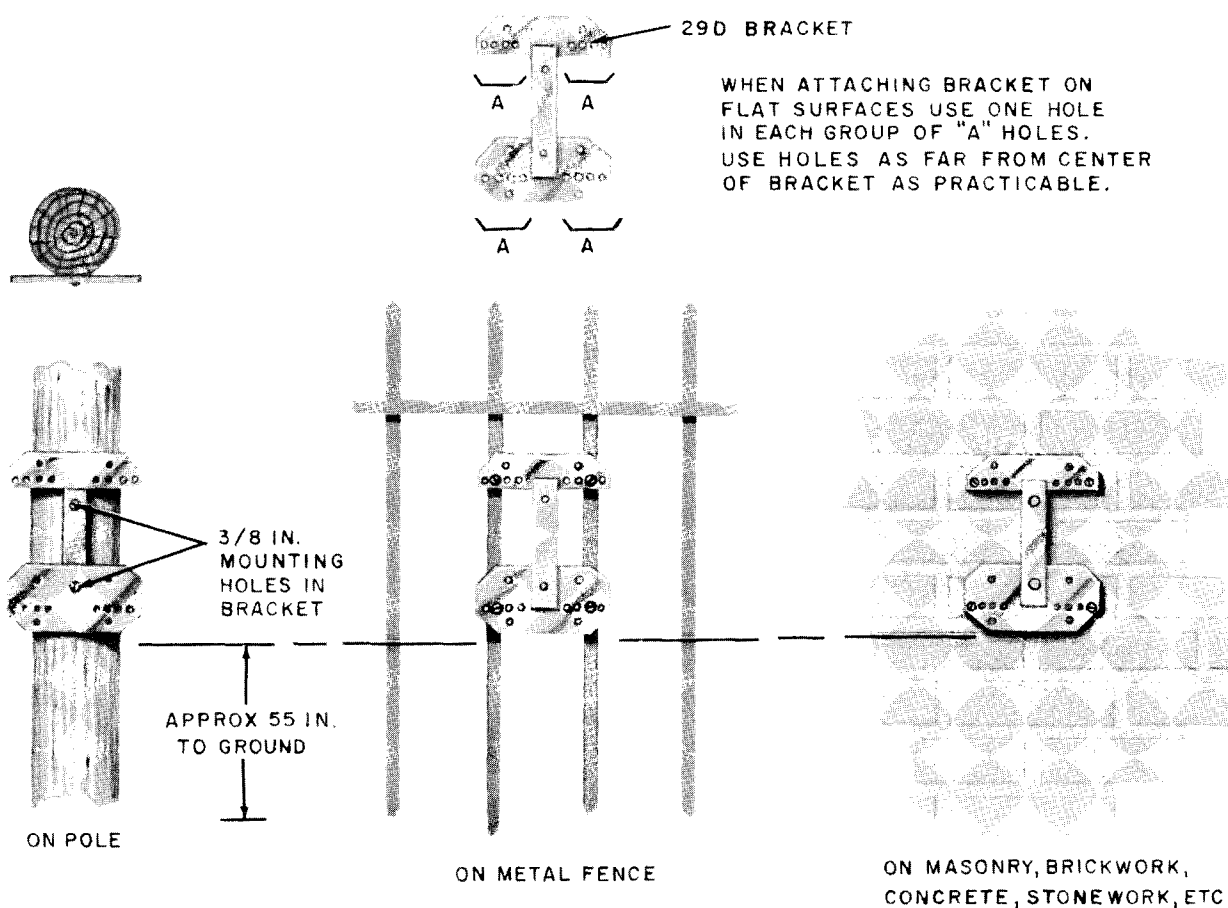


Fig. 3—29D Bracket Mounted on Various Surfaces

TABLE C
FASTENERS FOR 29D BRACKET

SURFACE	QUAN	FASTENERS
Wood	4	1-1/2 in. No. 14 RH galvanized wood screws
Wood poles	4	2-1/2 in. or longer No. 14 RH galvanized wood screws
Wood poles (where diameter of pole is 8 inches or less)	2	5/16 x 3 in. coach screws or 2-1/2 in. or longer No. 14 RH galvanized wood screws
Finished masonry, brickwork, concrete, etc	4	5/16 x 2-1/4 in. hammer drive anchors, or approved equivalent
Solid metal — metal fences, columns, etc*	4	1 x 5/16 in. No. 18 RH brass machine screws. Drill and tap holes using 17/24 in. drill and 5/16 in. No. 18 tap
Hollow tile, corrugated metal, plaster board, etc	4	1/4 x 4 in. RH toggle bolts

* Iron straps, bolts, etc may be used where local instructions permit. Attach telephone set securely.