

B, K, AND M BRIDLE RINGS

1. GENERAL


1.01 The B, K, and M bridle rings are intended for use with B, C, and D insulator supports and B Beam Clips to support wires and cable from structural steel framework.

1.02 This section is reissued to:

- Add K bridle ring
- Replace Fig. 2 to show B bridle ring and change callouts Fig. 1

1.03 The B bridle ring is the open eye type which permits wires to be inserted with wire raising tool. It has a galvanized finish, 1-1/4 inch diameter opening, and 10-24 threaded shank.

1.04 The K and M bridle rings are the closed eye type which require the wiring to be dressed through the eye opening. These bridle rings are galvanized finished, 3/4-inch and 1-1/4 inch diameter opening, respectively, and 10-24 threaded shank.

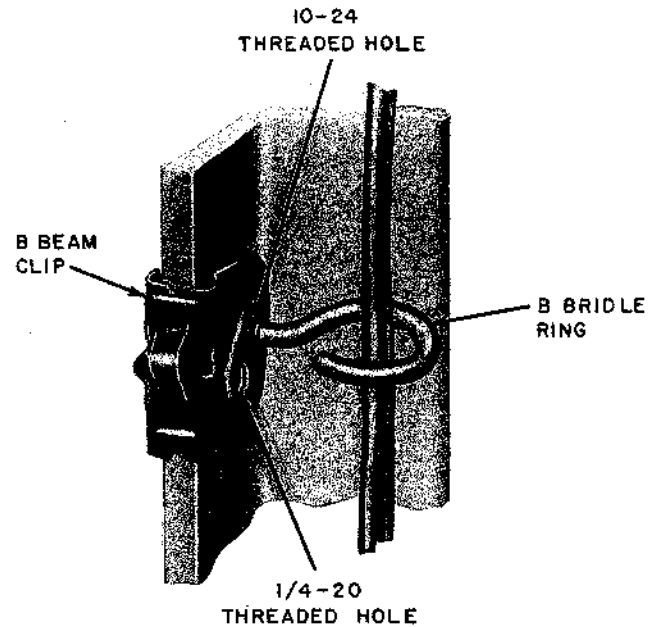

► Fig. 2—Installed K or M Bridle Ring Using B Insulator Support ◄

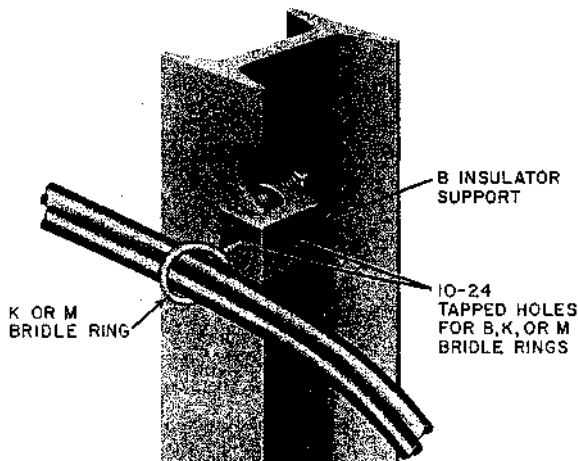


Fig. 1—Installed B Bridle Ring Using B Beam Clip