

E DROP WIRE CLAMP

1. GENERAL

1.01 The E drop wire clamp (Fig. 1) is used as the last building attachment of drop wire when porcelain insulated building attachments are not required.

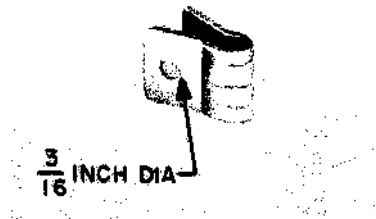


Fig. 1 - E Drop Wire Clamp

1.02 The clamp is made of a electrogalvanized steel strip. It is formed into a modified U shape with the loop portion conforming to the cross section.

1.03 The clamp should be located within 18 inches of the building entrance hole. Fig. 2 illustrates a typical installation.

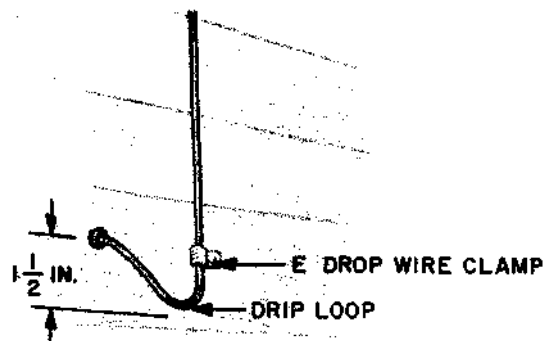


Fig. 2 - E Drop Wire Clamp Installed