

EXTENSION LADDERS AND ATTACHMENTS

DESCRIPTION AND USE

CONTENTS	PAGE
1. GENERAL	1
2. DESCRIPTION	1
3. SAFETY PRECAUTIONS	1
4. SELECTING LENGTH OF LADDER	4
5. SELECTING FOOTING	4
6. PROVISIONS FOR SUPPORTING UPPER END	6
7. RAISING AND LOWERING	13
8. HANDLING TOP SECTIONS	18
9. TRANSPORTING	20
10. INSPECTION, MAINTENANCE, CARE AND STORAGE	23

1. GENERAL

1.01 This section describes the C and D Extension Ladders and standard attachments presently used in the Bell System and specifies methods for using the ladders and attachments safely.

1.02 This section is reissued to show hard hats on craftsmen in the illustrations and to make other minor changes. Since this is a general revision, arrows ordinarily used to indicate changes have been omitted.

2. DESCRIPTION

2.01 *C and D Extension Ladders* are provided for use when working aloft in installation, construction, and maintenance work.

2.02 The *C Extension Ladder* consists of two wooden sections of equal length, each having

parallel side rails and equally spaced wooden rungs. The side rails are made of seasoned, untreated wood and the rungs are made of wood which has been treated with pentachlorophenol-petroleum solution to minimize decay at the point where the rungs join the side rails. The top section is raised by a 3/8-inch manila rope, except in the case of the 16-foot ladder for which no rope is needed. The top section of each ladder is equipped with two automatic spring locks, securely attached to the side rails, which engage rungs of the bottom section.

2.03 The C ladders (Fig. 1) are supplied in 16-, 20-, 24-, 28-, 32-, 36-, and 40-foot sizes. The size of an extension ladder is the sum of the lengths of the two sections, *not the length the ladder is designed to reach*. If desired, all ladders longer than the 16-foot size can be obtained with spurs to prevent the ladder feet from slipping. Where work is to be done on aerial cable, the 20-, 24-, or 28-foot sizes may be obtained equipped with rotatable ladder hooks.

2.04 The *D Extension Ladders* (Fig. 2) are available in 24- and 28-foot sizes only. These ladders consist of two sections with parallel side rails of laminated wood coated with green natural stain and have tubular aluminum rungs. The faces of the side rails have been grooved between the rung positions to effect a weight reduction. The top section is equipped with automatic spring locks which engage rungs of the bottom section. A 3/8-inch manila rope and pulley are provided for raising and lowering the top section. The ladders may be equipped with spurs to prevent slipping. Where work is to be done on aerial cable, the ladders may be obtained equipped with rotatable ladder hooks.

3. SAFETY PRECAUTIONS

3.01 Whenever possible in areas exposed to vehicular traffic, place ladder on the strand from the field side of the cable to avoid danger from passing vehicles. If vehicular traffic is not

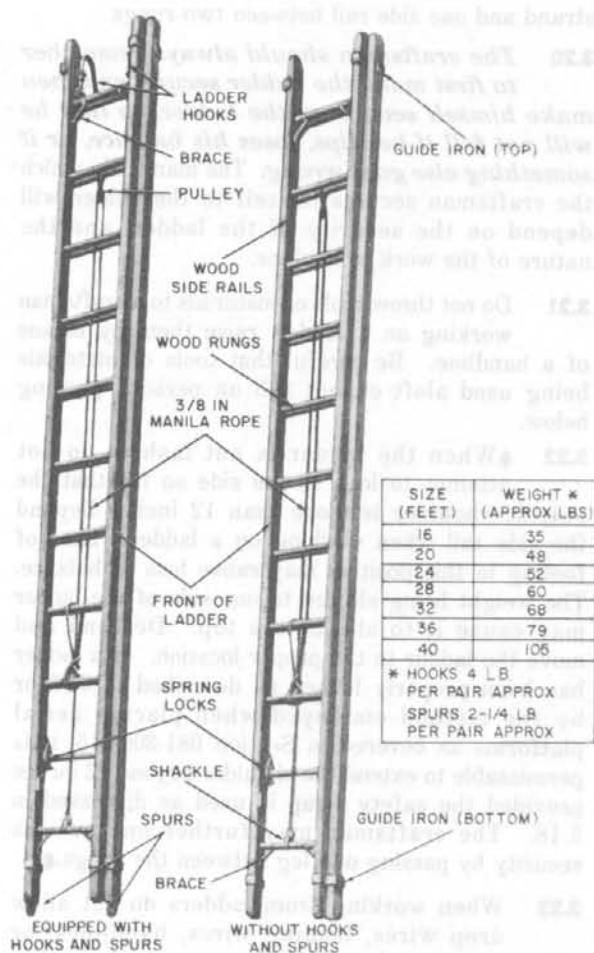


Fig. 1—C Extension Ladders

a problem, the ladder may be placed against the strand from the street side of the cable.

3.02 If a ladder must be placed at a work location where it may be struck by passing vehicles and a company vehicle is available, the truck should be parked with brakes set to provide maximum protection for the ladder without obstructing traffic. In addition, warning signs, flags, traffic cones, or flashing signals (Section 620-135-100) should be placed to divert the flow of traffic from the work area as described in Section 620-135-010.

3.03 Do not use ladders with broken or missing rungs, broken side rails, broken locks, or defective ladder ropes.

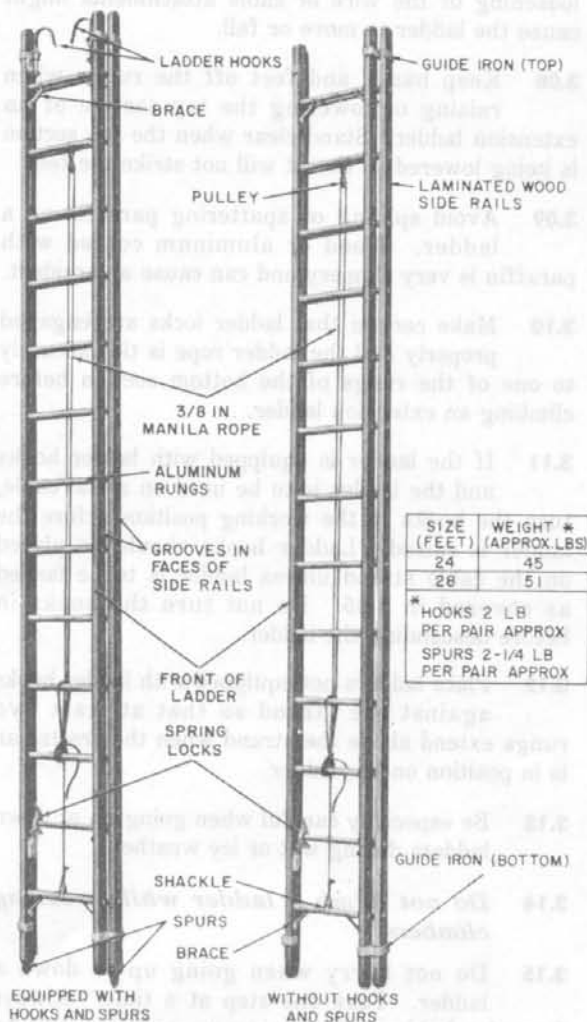


Fig. 2—D Extension Ladders

3.04 Use only standard extension ladders.

3.05 Do not place ladders on boxes, barrels, or other objects to obtain additional height; use a ladder of sufficient length for the job at hand.

3.06 Follow the instructions given in 5.07 when the surface on which the base of the ladder is resting is such that the ladder may have a tendency to slip.

3.07 Do not place a ladder inside or opposite an angle formed by wires or cables where

loosening of the wire or cable attachments might cause the ladder to move or fall.

3.08 Keep hands and feet off the rungs when raising or lowering the top section of an extension ladder. Stand clear when the top section is being lowered so that it will not strike the feet.

3.09 Avoid spilling or spattering paraffin on a ladder. Wood or aluminum coated with paraffin is very slippery and can cause an accident.

3.10 Make certain that ladder locks are engaged properly and the ladder rope is tied securely to one of the rungs of the bottom section before climbing an extension ladder.

3.11 If the ladder is equipped with ladder hooks and the ladder is to be used on aerial cable, turn the hooks to the working position before the ladder is raised. Ladder hooks should be placed on the cable strand unless ladder is to be lashed as covered in 6.05. Do not turn the hooks in before descending the ladder.

3.12 Place ladders not equipped with ladder hooks against the strand so that at least two rungs extend above the strand when the craftsman is in position on the ladder.

3.13 Be especially careful when going up or down ladders during wet or icy weather.

3.14 *Do not climb a ladder while wearing climbers.*

3.15 Do not hurry when going up or down a ladder. Take one step at a time. Always face the ladder when going up or down and be sure to have both hands free.

3.16 Only one person at a time is permitted on a ladder.

3.17 When a ladder is lashed, or otherwise secured so that it cannot fall, the craftsman may improve his security by passing one leg between the rungs.

3.18 If the top end of the ladder is secured to suspension strand or other support, the craftsman may increase his safety by passing his safety strap around one rung, or between two rungs and around one side rail.

3.19 When the ladder is properly placed on strand, (hooks over strand or two rungs above strand) pass the safety strap around the

strand and one side rail between two rungs.

3.20 *The craftsman should always remember to first make the ladder secure, and then make himself secure on the ladder, so that he will not fall if he slips, loses his balance, or if something else goes wrong.* The manner in which the craftsman secures himself to the ladder will depend on the security of the ladder, and the nature of the work to be done.

3.21 Do not throw tools or materials to a craftsman working on a ladder; raise them by means of a handline. Be careful that tools or materials being used aloft cannot fall on persons passing below.

3.22 When the ladder is not lashed, do not attempt to lean to the side so far that the outside shoulder is more than 12 inches beyond the side rail when working on a ladder. Loss of footing in this position may cause loss of balance. The weight being shifted to one side of the ladder may cause it to slip at the top. Descend and move the ladder to the proper location. If a ladder has been properly lashed as described in 6.05 or by the method employed when placing aerial platforms as covered in Section 081-300-015, it is permissible to extend the shoulder beyond 12 inches provided the safety strap is used as discussed in 3.18. The craftsman may further improve his security by passing one leg between the rungs.

3.23 When working from ladders do not allow drop wires, lashing wires, handlines, or ladder ropes to dangle to the ground where they may be struck by passing vehicles. A wire or rope caught on a passing vehicle may pull the ladder causing it to fall or it may pull the craftsman off the ladder. The handline, when not in use, shall be tied to the lower portion of the ladder or pulled aloft.

3.24 Do not slide down an extension ladder.

3.25 Never carry an extension ladder from one location to another while it is extended. First lower the ladder and secure the ladder rope, then extend it again at the new location.

3.26 Point the spurs forward and downward when carrying a ladder on the shoulder.

3.27 Avoid swinging the ladder into the path of passing vehicles or pedestrians when carrying a ladder or removing it from a vehicle.

3.28 Do not place ladders where they may come in contact with power lines.

- 3.29** Do not tie drop wires or pulling lines to ladders.
- 3.30** Do not use a ladder in a horizontal position as a platform, runway, or scaffold.
- 3.31** Do not place a ladder against a suspension strand which is held under tension by a strand puller only.

4. SELECTING LENGTH OF LADDER

- 4.01** The maximum working length of an extension ladder is from 4 to 5 feet less than its given size. The maximum working length for the various sizes of ladder is given in Table A.

TABLE A

WORKING LENGTHS OF EXTENSION LADDERS		
SIZE OF LADDER (FEET)	MAXIMUM WORKING LENGTH (FEET)	MINIMUM OVERLAP (FEET)
16	12	4
20	16	4
24	20	4
28	24	4
32	28	4
36	31	5
40	35	5

- 4.02** Local conditions determine the size of ladder to be carried by plant forces. However, the 20- or 24-foot extension ladder equipped with ladder hooks will usually meet the conditions encountered by installation and repair forces and the 28- or 32-foot ladder will meet the requirements of the construction forces. A ladder not equipped with ladder hooks may be used if it is secured to the strand as outlined in 6.01 through 6.07.

- 4.03** Always select a ladder of sufficient length for the work to be done. The length of

the ladder should be such that the work can be performed when standing no higher than on the fourth rung from the top, thus permitting the side rails to be grasped conveniently. If the ladder is too short for the work at hand, obtain a longer ladder.

5. SELECTING FOOTING

5.01 Use care in positioning ladders before climbing them. Place the foot of the ladder on the ground or other firm support so that distance B (Fig. 3 and 4) from the base of the ladder to a line extended vertically from the top support is approximately one-fourth of the length of the ladder measured from top support to bottom support. If distance B is greatly exceeded, there is danger of imposing excessive stresses on the ladder. If distance B is considerably less than one-fourth of distance A, the ladder will be pitched so steeply that the work cannot be done safely. In any case if the base of the ladder is likely to slip, the ladder shall be braced, fastened, or securely held.

5.02 Set a ladder only on secure footing. Set both feet of the ladder at the same level and on a line parallel to the surface on which the top of the ladder rests. If necessary, employ a B Ladder Foot or remove earth from beneath the high side to bring it to the level of the lower side. *Never increase the length of a side rail by nailing a board to it.* If a ladder leans to either the right or the left, it is not properly placed. Always place an extension ladder with the top section to the front. A well placed ladder is shown in Fig. 5.

5.03 The *B Ladder Foot* (Fig. 6) consists of a pivoted semiwheel spur and plate attached to the lower end of a movable rack. The rack with its spring-loaded pawl is mounted on a housing enclosing a screw-operated clamp for attaching the foot to the lower end of a side rail of an extension ladder. The foot can be used on ladders with or without spurs.

5.04 To install the B Ladder Foot, the foot should be in the shortened position. Place the foot on the end of the side rail to be leveled and then turn the thumbscrew until the foot is securely attached. After the ladder has been raised, extend the foot to the desired position by holding the side rails of the ladder with the hands and stepping on the foot plate of the B Ladder Foot (Fig. 7).

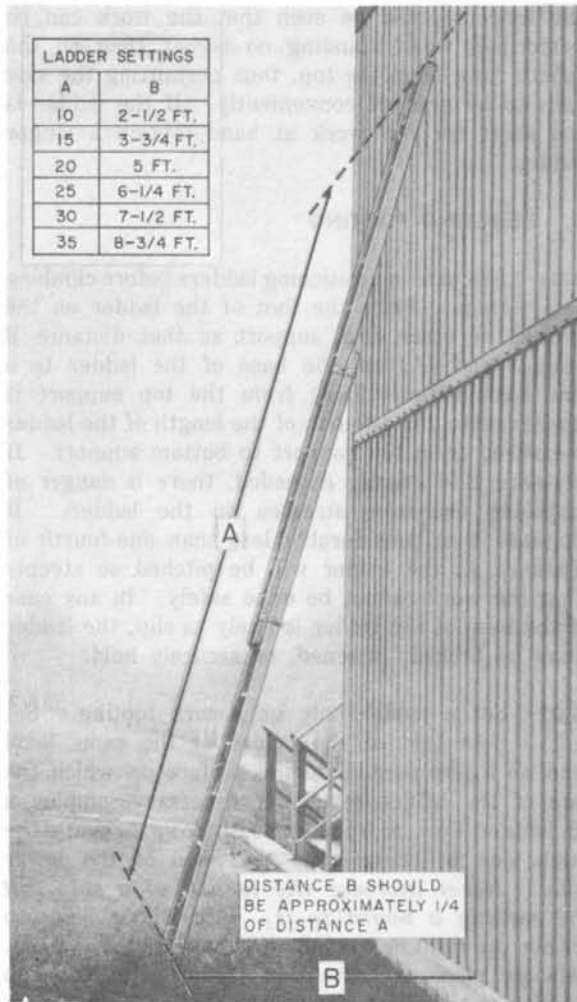


Fig. 3—Ladder Placed Against Wall

5.05 The ladder foot must not be shortened while the ladder is in the raised position.

5.06 After the ladder has been lowered, disengage the pawl of the ladder foot with the fingers and shorten the foot by pressing on the plate. Remove the ladder foot from the side rail when not in use.

5.07 When it is impossible to avoid placing the base of the ladder on a surface where it might slip, such as on wet or oily pavement, a smooth floor, or icy or metal surfaces, tie the base of the ladder securely in place. If this is impractical, the ladder must be held by another craftsman. The

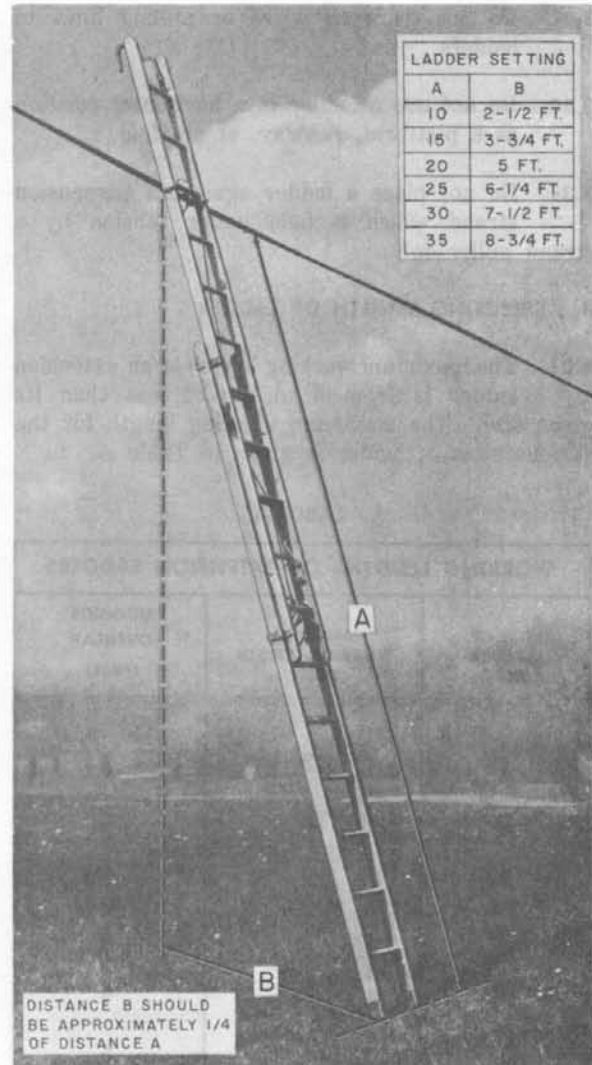


Fig. 4—Ladder Placed Against Strand

person holding the ladder shall be on the alert at all times to protect the person on the ladder and anyone passing below him. Never leave a raised ladder unattended under these conditions. The ladder might slip and cause injury, damage, or both.

5.08 Avoid placing a ladder in front of a doorway, especially where the door opens toward the ladder. Avoid placing a ladder near passageways, near moving machinery, or at locations where vehicles or pedestrians may strike or displace it.

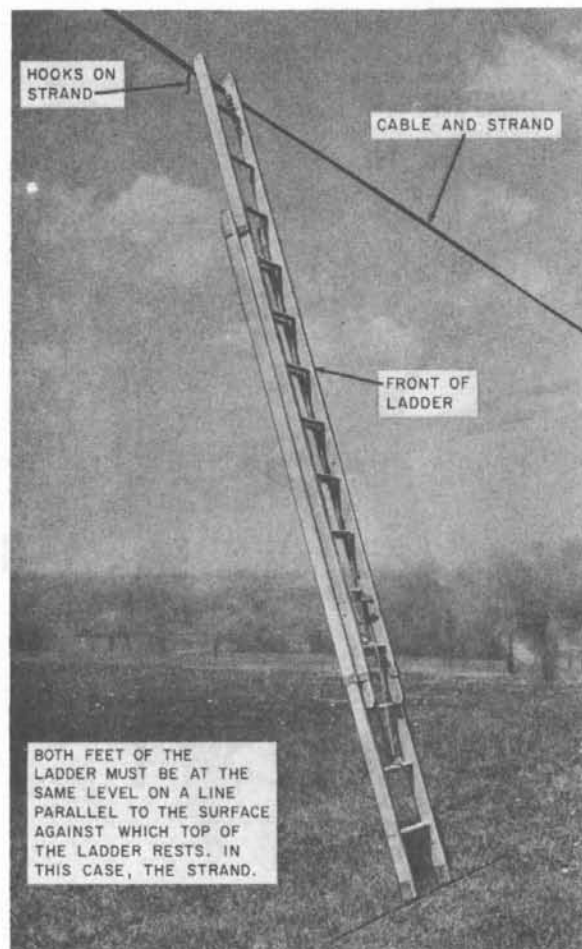


Fig. 5—Base of Ladder Properly Positioned

When these conditions cannot be avoided, or when a door cannot be secured in the open position or locked with no possibility of its being opened inadvertently, make arrangements to have the ladder guarded by another craftsman. Also, use warning devices to alert people of activity beyond a closed door.

6. PROVISIONS FOR SUPPORTING UPPER END

6.01 Objects against which the top of the ladder will be placed shall be sufficiently rigid and have ample strength to support the ladder and the craftsman on it. Certain work operations performed from a ladder (for example, moving a cable manually) will increase the load on the ladder

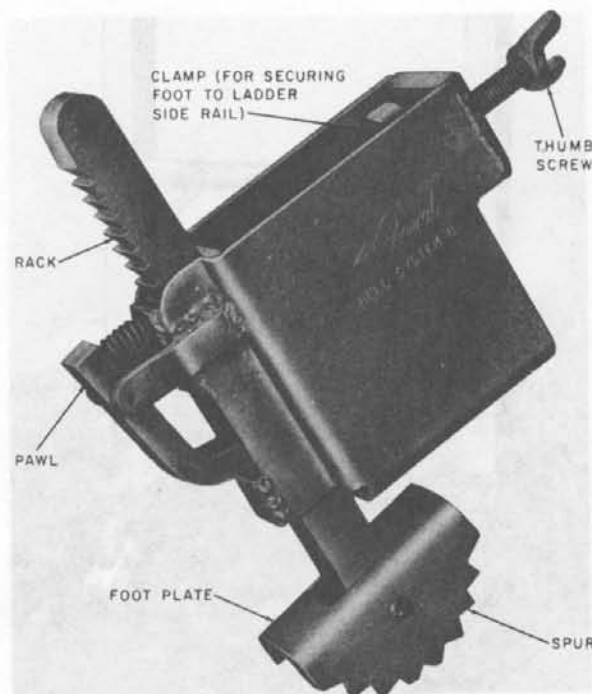


Fig. 6—B Ladder Foot

and this shall be taken into account when judging the strength of the upper support for the ladder.

6.02 Before placing a ladder against suspension strand, test the strength of the suspension strand and its supports as given in Section 627-295-500.

6.03 The strand and supports which will withstand the test in 627-295-500 without showing any signs of failure or slippage will have ample strength to support the ladder and craftsman. After such a test, it may be advantageous to leave the rope on the strand for raising and lowering the ladder, and for securing the ladder to the strand as outlined in 7.01 through 7.13.

6.04 When using a ladder on a strand having a fairly steep slope, secure the ladder with rope to prevent the top of the ladder from sliding along the strand. Before raising the ladder, throw or place a handline over the strand and secure one end of the handline to the second rung from the top of the top section of the ladder. An easy method of raising a ladder using a handline is



Fig. 7—B Ladder Foot Installed

covered in Part 7. After placing the ladder on the strand, pull the other end of the handline taut and secure it to an adequate support on the uphill side of ladder, such as a pile, tree, or digging bar firmly placed in the ground. If no such anchorage can be obtained, the ladder may be secured to the cable and strand by throwing or placing the handline over the strand again, so that the rope passes twice around the cable and strand, and then tying the rope securely to a rung on the lower section of the ladder.

6.05 When a ladder is placed against the strand and heavy work such as pulling or lifting is to be done, lash the ladder to the strand with a short length of rope, as shown in Fig. 8. Where the cable is supported in rings, pass the lashing rope around the strand only; where the cable is lashed, pass the lashing rope around the strand and cable. **Do not move the base of the ladder after the upper end has been secured to the strand.**

6.06 Take care when pushing or pulling heavy loads from a working position on a ladder not to place undue stress on the ladder.

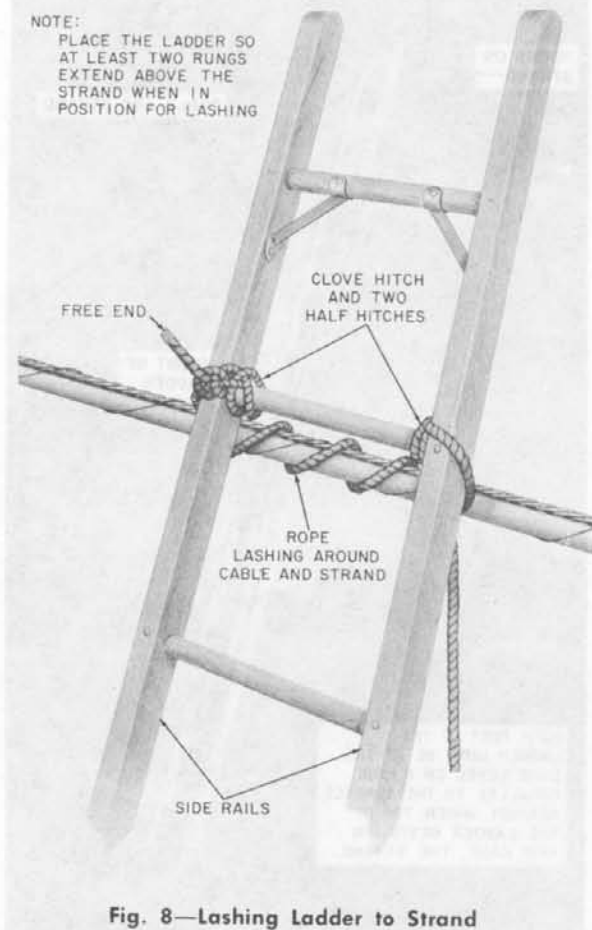


Fig. 8—Lashing Ladder to Strand

6.07 When using a ladder on a suspension strand that is attached to a building wall, wherever possible place the ladder so that it will tend to push the wall attachment against rather than away from the building wall.

6.08 When placing a ladder against a tree, select the tree trunk or its larger limbs for support. When it is necessary to place a ladder so the top rung rests against a tree trunk or similar object, a handline may be thrown or placed with a wire-raising tool or tree pruner handle over a tree limb, tied to the top rung of the ladder, and used to assist in raising the ladder. After the ladder has been placed, tie the free end of the handline to one of the lower rungs, thus holding the ladder until a more secure lashing is made. The ladder shall be lashed securely at one or two points in a manner which will prevent the ladder from twisting or sliding when the craftsman's weight is put on

one side. The lashing can be made in the following manner with a second rope (Fig. 9).

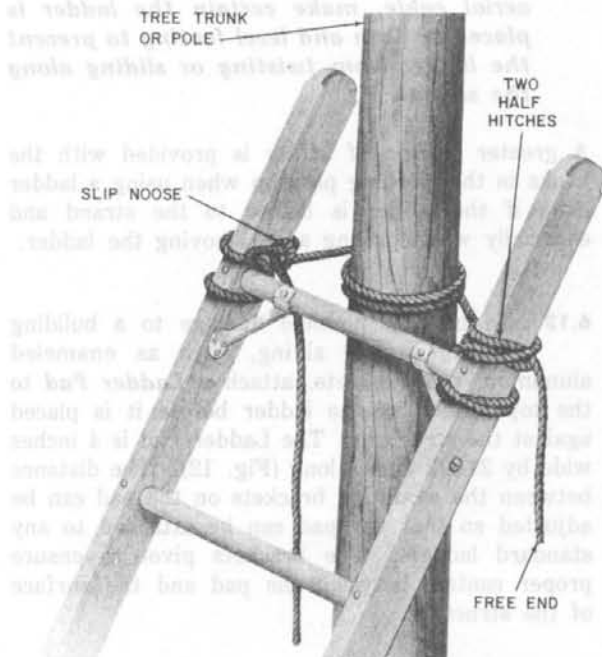


Fig. 9—Ladder Lashed to Tree or Pole

- (a) Make a slip noose about 15 feet from the free end of the rope so that the noose will tighten when the free end of the rope is pulled.
- (b) Place the slip noose over the top end of one side rail.
- (c) Pass the free end of the rope down behind and under the top rung, then toward the front of the ladder, around the rail, and then back of the tree or pole.
- (d) Make two complete wraps around the tree or pole, then pass the rope twice around the opposite rail below the first rung and then up behind the rung.
- (e) Reverse the direction of wrapping and make two half-hitches on the rail so that the ladder is lashed tightly to the tree or pole.

6.09 Never place an extension ladder against a window sash. If it is impractical to avoid

placing a ladder in front of a window, lash a board to the ladder as shown in Fig. 10 or use a ladder pad (6.13), in order to provide support on each side of the window frame.



Fig. 10—Ladder Placed in Front of Window

6.10 The *ladder hooks* provided on C and D Extension Ladders are shown in Fig. 11.

6.11 When not in use, turn the hooks in between the rails. To rotate a hook, push it toward the lower end of the ladder, turn it 90 degrees, then release. The coil spring locks the hook in

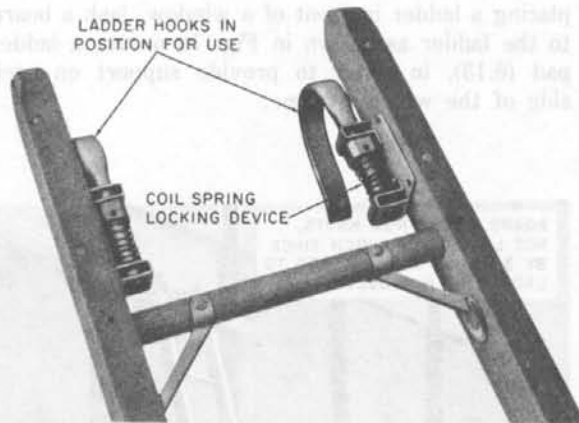


Fig. 11—Ladder Hooks

either of two positions. Turn ladder hooks in between the rails when the ladder is to be placed against building walls or other flat surfaces.

- 6.12 The ladder hooks on C and D Extension Ladders should be used on lashed,

ring-supported, and self-supporting cable when the ladder is not lashed to the strand.

Caution: When using ladder hooks on aerial cable, make certain the ladder is placed on firm and level footing to prevent the ladder from twisting or sliding along the strand.

A greater margin of safety is provided with the hooks in the working position when using a ladder even if the ladder is lashed to the strand and especially when placing and removing the ladder.

- 6.13 To prevent possible damage to a building having fragile siding, such as enameled aluminum, asbestos, etc, attach a **Ladder Pad** to the top section of the ladder before it is placed against the structure. The Ladder Pad is 4 inches wide by 24-1/2 inches long (Fig. 12). The distance between the mounting brackets on the pad can be adjusted so that the pad can be attached to any standard ladder. The brackets pivot to ensure proper contact between the pad and the surface of the structure.

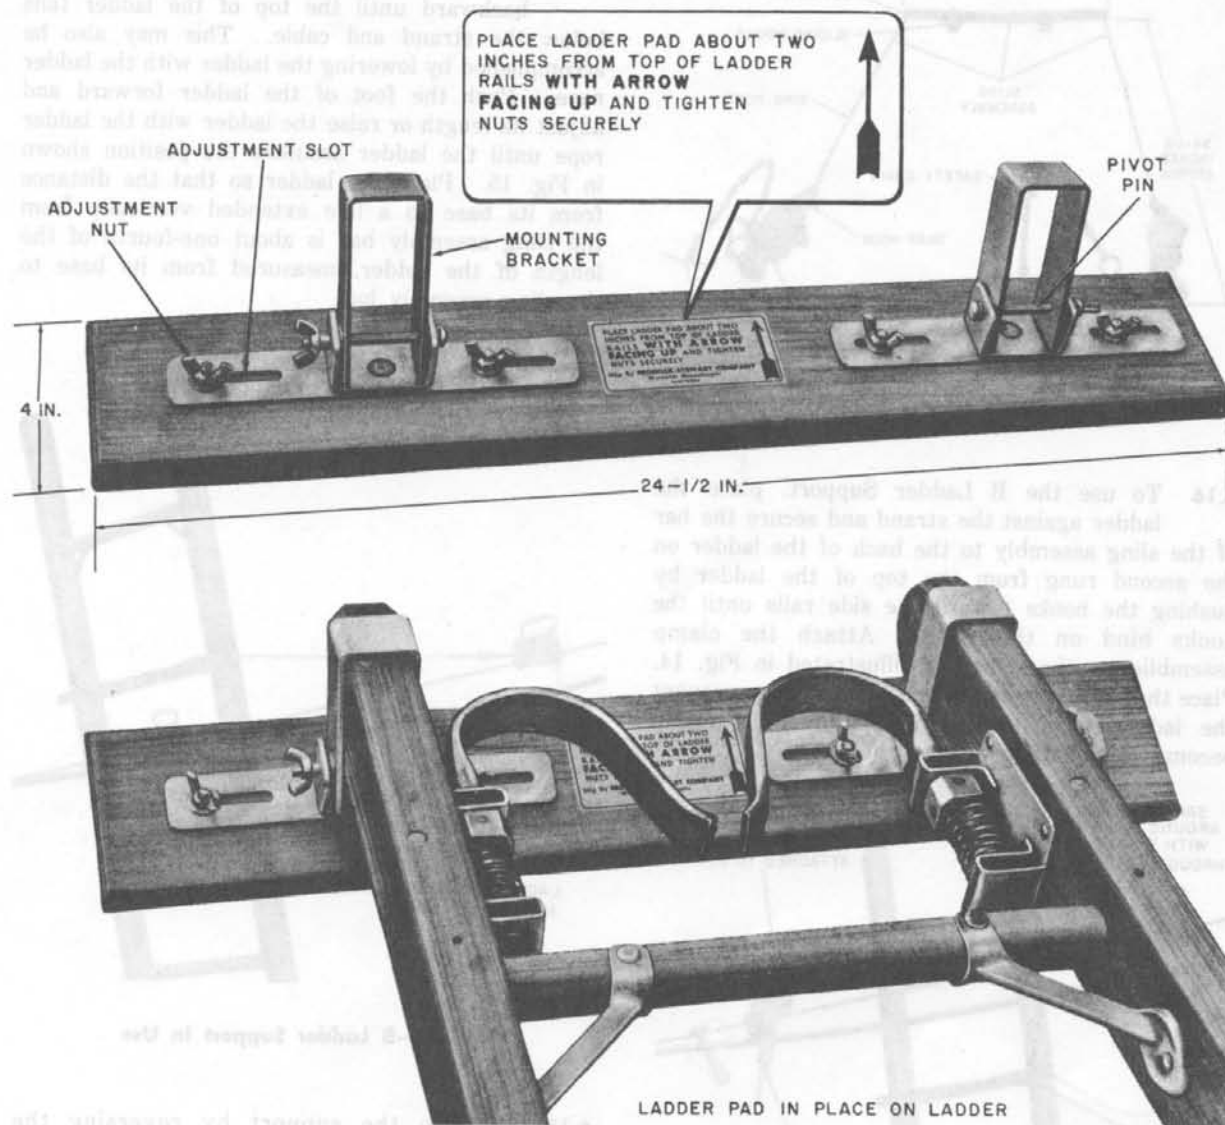


Fig. 12—Ladder Pad

6.14 The use of the B Ladder Support or C Ladder Support in supporting the upper end of the ladder permits the craftsman to sit or stand between the ladder and the cable.

6.15 The **B Ladder Support** consists of a sling assembly and two clamp assemblies which are grooved to fit the strand. The clamps can be attached to the strand of either lashed, ring-supported,

or self-supporting cable without disturbing the cable. The clamps are equipped with safety chains to prevent them from falling in the event of accidental disengagement. The sling assembly consists of a bowed bar equipped with two sliding hooks and two wire ropes, one at each end of the bar. Each wire rope terminates in a snap hook which connects the rope to a clamp assembly. The B Ladder Support is shown in Fig. 13.

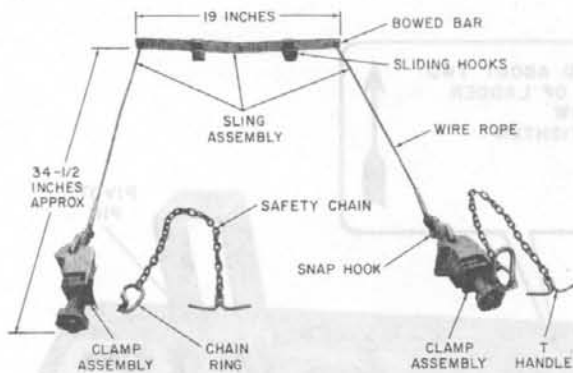


Fig. 13—B Ladder Support

6.16 To use the B Ladder Support, place the ladder against the strand and secure the bar of the sling assembly to the back of the ladder on the second rung from the top of the ladder by pushing the hooks toward the side rails until the hooks bind on the rung. Attach the clamp assemblies to the strand, as illustrated in Fig. 14. Place the safety chains around the strand to prevent the ladder from turning in the event a clamp becomes accidentally disengaged.

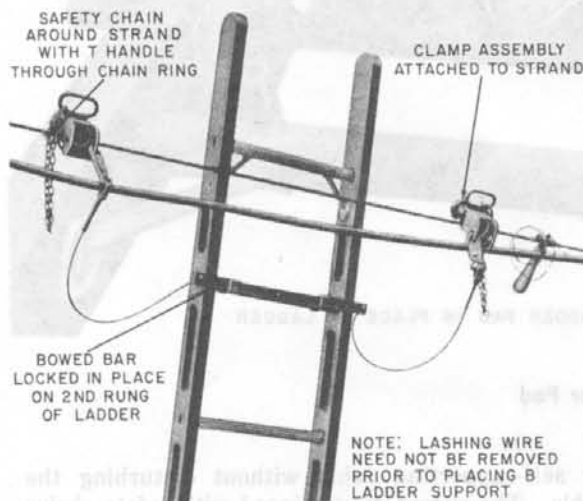


Fig. 14—B Ladder Support Attached to Strand

6.17 Descend and pull the foot of the ladder backward until the top of the ladder falls below the strand and cable. This may also be accomplished by lowering the ladder with the ladder rope. Push the foot of the ladder forward and adjust its length or raise the ladder with the ladder rope until the ladder assumes the position shown in Fig. 15. Place the ladder so that the distance from its base to a line extended vertically from the sling assembly bar is about one-fourth of the length of the ladder, measured from its base to the sling assembly bar.

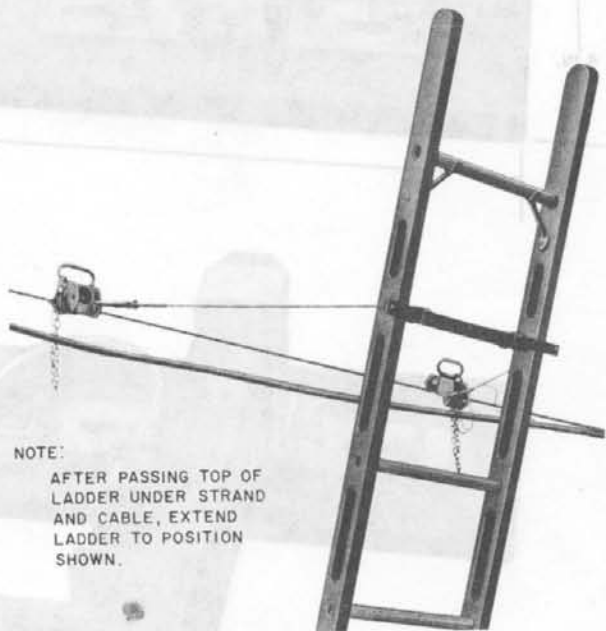


Fig. 15—B Ladder Support In Use

6.18 Remove the support by reversing the procedures shown in 6.16 and 6.17.

6.19 The clamp assemblies of the B Ladder Support may be used to attach an extension ladder to the strand. The large loop on the top edge of the clamp provides a means for lashing the ladder to the clamp with 1/2-inch manila rope. The rails of the ladder are placed in the channels of the

clamps to hold the ladder away from the cable. Fig. 16 shows the method of using the clamp assemblies to attach an extension ladder to the strand.

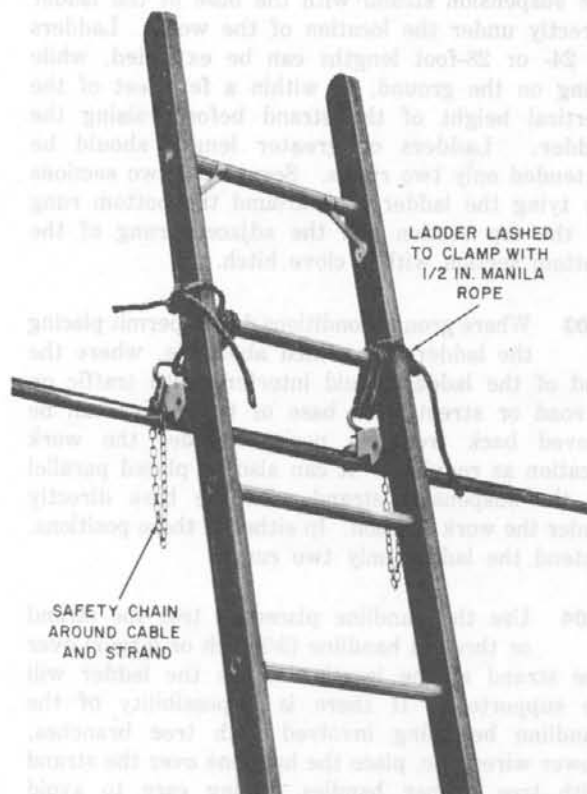


Fig. 16—Ladder Attached to Strand with B Ladder Support Clamps

6.20 The *C Ladder Support* is illustrated in Fig. 17. It consists of two screw clamp assemblies grooved to fit the strand and permanently attached to a U-shaped member made of aluminum alloy pipe. The clamps are equipped with chains for encircling the cable and strand as an added safety measure. The U-shaped member is for rigidly supporting the ladder away from the strand. A rope, attached to the center of the member, is tied to a rung of the ladder as a safety measure while placing the ladder in the support. The U-shaped member is also equipped with a fitting to receive one side rail of the ladder for locating the ladder centrally in the support. The grooves in the clamps permit attaching the support to either lashed, ring-supported, or self-supporting cable without disturbing the cable.

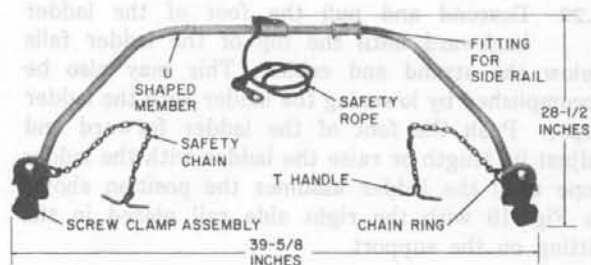


Fig. 17—C Ladder Support

6.21 To use the *C Ladder Support*, place the ladder against the strand and attach the support to the strand on the opposite side from the ladder. Place the safety chains around the strand or cable and strand. After the clamps are tightened the support will be in the position shown in Fig. 18. Attach the rope to the fifth rung from the top of the ladder. This will prevent the support from passing over the top of the ladder when the ladder is moved as described in 6.22.

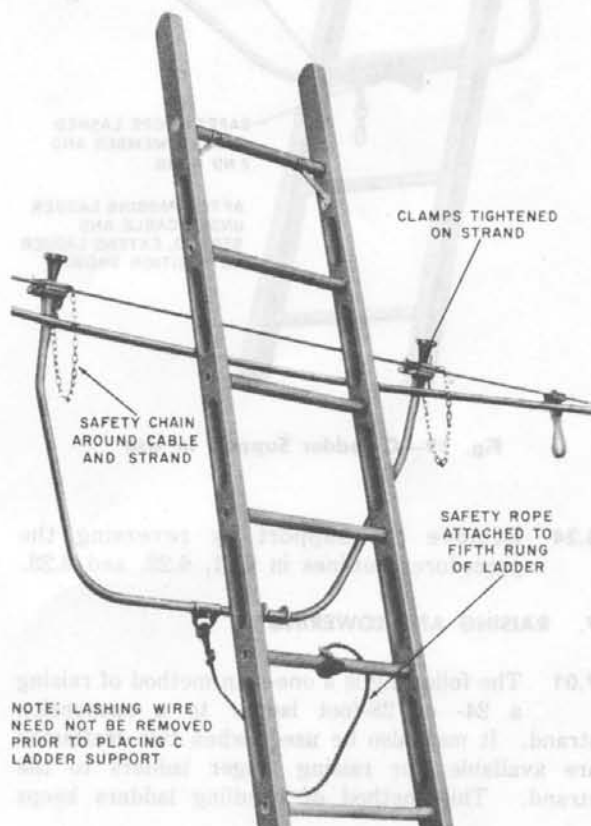


Fig. 18—C Ladder Support in Position on Strand

6.22 Descend and pull the foot of the ladder backward until the top of the ladder falls below the strand and cable. This may also be accomplished by lowering the ladder with the ladder rope. Push the foot of the ladder forward and adjust its length or raise the ladder with the ladder rope until the ladder assumes the position shown in Fig. 19 with the right side rail placed in the fitting on the support.

6.23 Climb the ladder, detach the rope from the fifth rung, and use it to tie the ladder support member to the second rung from the top, as shown in Fig. 19.



Fig. 19—C Ladder Support in Use

6.24 Remove the support by reversing the procedures outlines in 6.21, 6.22, and 6.23.

7. RAISING AND LOWERING

7.01 The following is a one-man method of raising a 24- or 28-foot ladder to a suspension strand. It may also be used, when two craftsmen are available, for raising longer ladders to the strand. This method of handling ladders keeps

the ladder under control at all times, and provides a temporary lashing to the strand before climbing.

7.02 Where ground conditions allow, place the ladder on the ground at a right angle to the suspension strand with the base of the ladder directly under the location of the work. Ladders of 24- or 28-foot lengths can be extended, while lying on the ground, to within a few feet of the vertical height of the strand before raising the ladder. Ladders of greater length should be extended only two rungs. Secure the two sections by tying the ladder rope around the bottom rung of the top section and the adjacent rung of the bottom section with a clove hitch.

7.03 Where ground conditions do not permit placing the ladder as outlined above (ie, where the end of the ladder would interfere with traffic on a road or street), the base of the ladder can be moved back from its position under the work location as required. It can also be placed parallel to the suspension strand with the base directly under the work location. In either of these positions, extend the ladder only two rungs.

7.04 Use the handline placed to test the strand or throw a handline (3/8-inch or larger) over the strand at the location where the ladder will be supported. If there is a possibility of the handline becoming involved with tree branches, power wires, etc, place the handline over the strand with tree pruner handles, taking care to avoid contact with power wires. In doing this, exercise care to prevent the free end of the handline from interfering with passing vehicles.

7.05 Tie the near end of the handline to the bottom rung of the ladder, using a clove hitch and two half-hitches or a block becket bend (Section 081-510-101). Take the other end of the handline to the top end of the ladder. Check the handline where it passes over the strand to see that it does not cross over itself and pass the free end behind the second rung from the top and then out on the top side of the ladder.

7.06 Carry the free end of the handline to the base of the ladder and stand with the feet on each side rail to block movement of the ladder base to the rear (Fig. 20).

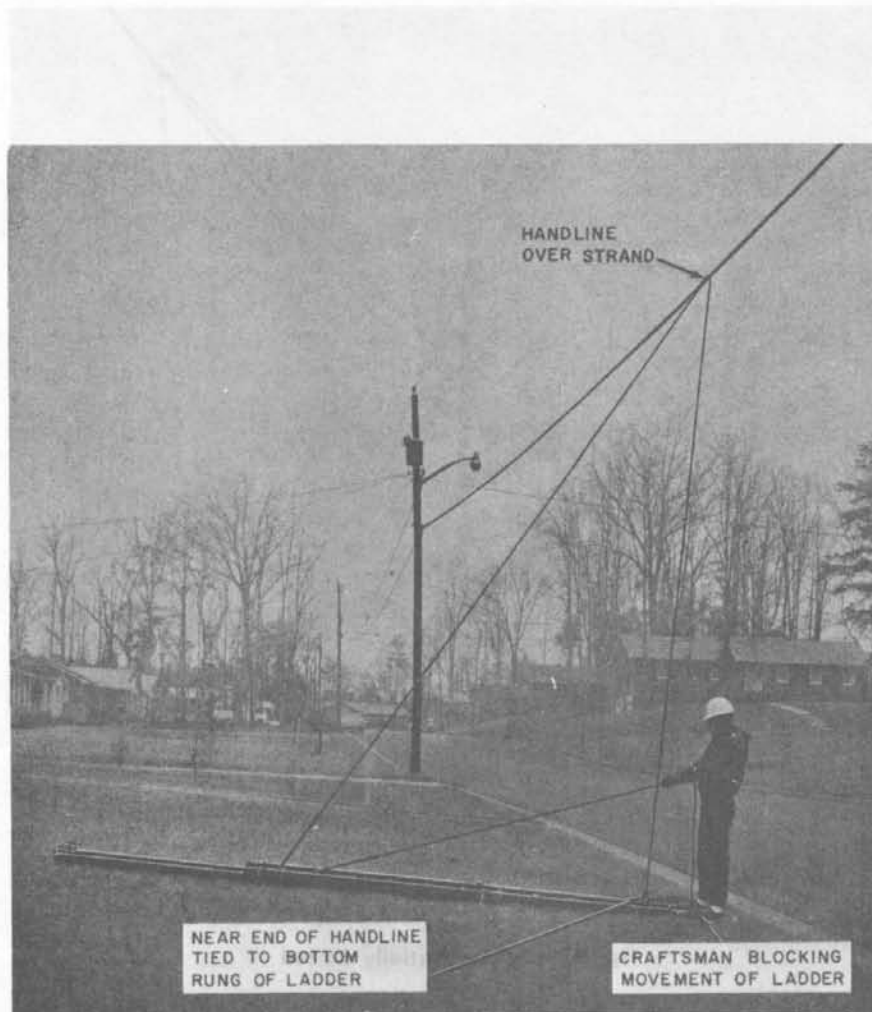


Fig. 20—Preparing to Raise Extension Ladder

7.07 Pull the handline hand over hand. As the top end of the ladder is raised off the ground,

keep feet in position to block any movement of the base of the ladder to the rear (Fig. 21).

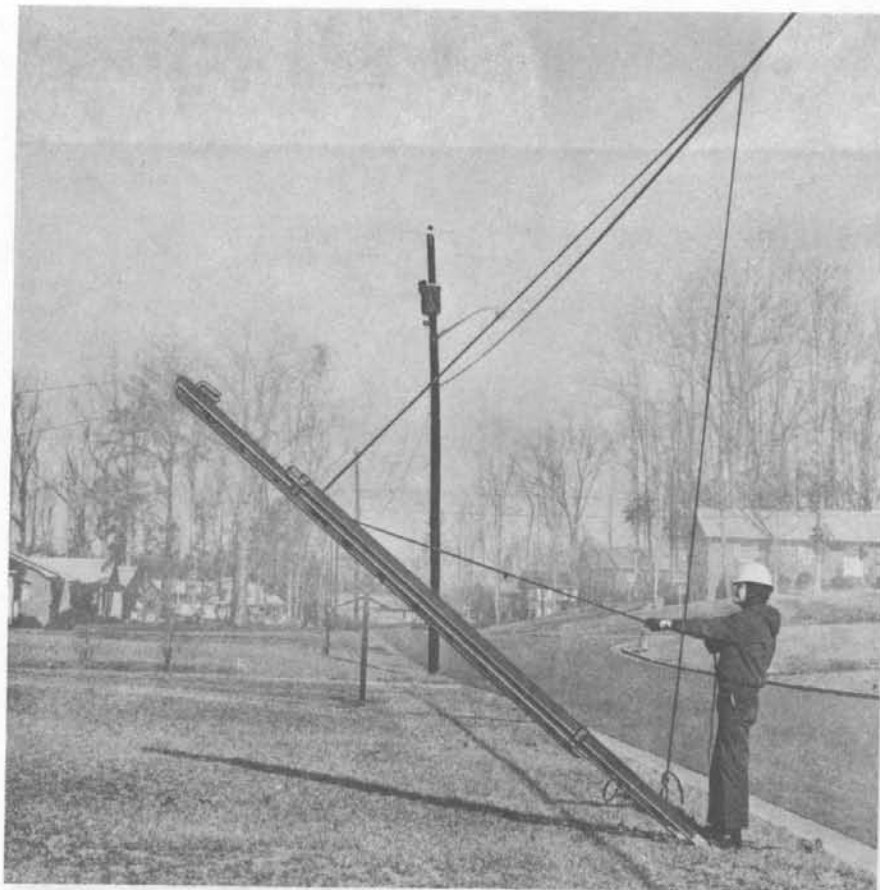


Fig. 21—Ladder Partially Raised

7.08 Continue pulling the free end of the handline until the ladder is in a vertical position under the strand (Fig. 22).



Fig. 22—Ladder in Vertical Position

7.09 If, as in the first part of 7.03, the ladder base was not placed under the strand, the base should be moved directly under the strand. To do this, tie the free end of the handline to a ladder rung with a clove hitch and two half-hitches and move the base of the ladder in position under the strand. Untie the free end of the handline and pull on the handline until the ladder is vertical.

7.10 With the ladder positioned vertically under the strand, hold the ladder in this position with one hand on the side rail, allow about 1 foot of slack in the free end of the handline, and hold this slack with the same hand on the side rail. Use the other hand to tie the rope around the second or third rung with a clove hitch and two half-hitches,

as shown in Fig. 23. If desired, the rope may be doubled or the tie may be made around two rungs to avoid having excess rope lying on the ground. The ladder is secured to the strand and cannot fall as long as the handline is tied to the ladder.



Fig. 23—Method of Securing Handline

7.11 Untie the ladder extension rope, taking care not to untie the handline. Pull on the ladder extension rope and extend the ladder until the top section is above the strand, preferably with the second rung level with the strand, and engage the ladder locks.

LOCKING TOP SECTION

7.12 To lock the top section after the top section has been raised to the desired height, continue raising the top section until the ends of the lock hooks are just above the rung to be engaged, then lower the top section until the inside curve of the hooks rests directly on the rung. Make sure that both locks are engaged.

7.13 Move the foot of the ladder out to its working position allowing the top of the ladder to rest on the strand (Fig. 24). It should not be necessary to extend the ladder further. However, if necessary to do so, untie the handline, extend the ladder, and retie the handline.



Fig. 24—Ladder in Working Position

7.14 To lower the ladder, move the foot of the ladder back under the strand. Leaving the handline over the strand tied at both ends, untie the ladder extension rope. Lower the top section until it is extended two rungs above the bottom section and secure the ladder locks. Untie the

upper end of the handline and lower the ladder gently to the ground by slowly paying out the handline. If the top end of the ladder tends to swing, move the foot of the ladder back while holding the handline securely.

7.15 A 20-, 24-, or 28-foot extension ladder may be raised or lowered by one man in the manner shown in Fig. 25 if the foot of the ladder is securely embedded in earth or is placed against the base of a wall, a pole, or other secure object.



Fig. 25—One Man Raising Ladder

7.16 In general, a 32-, 36-, or 40-foot extension ladder should be raised with the foot of the ladder held securely by one craftsman, while a second craftsman walks the ladder up to a vertical position similar to that shown in Fig. 26. As an alternative, if the foot of the ladder can be placed against the base of a wall, one craftsman alone can raise the ladder as described in 7.15.



Fig. 26—Two Men Raising Ladder

7.17 In raising and lowering extension ladders it is imperative that the craftsman handling the ladder maintain a secure footing at all times.

7.18 When lowering ladders, follow the reverse of the above procedures.

8. HANDLING TOP SECTIONS

RAISING TOP SECTION OF 20- TO 28-FOOT LADDERS

8.01 After the ladder has been raised to an upright balanced position, take a position in front of the ladder with one foot against the base of the ladder to prevent it from kicking out. Place the other foot in a bracing position to the rear of the ladder to provide a firm stance. Untie the ladder extension rope, and bring the free end of the rope around the side rail as shown in Fig. 27. The craftsman's foot at the base of the ladder reduces the possibility of the ladder slipping.



Fig. 27—Preparing to Extend Top Section

8.02 Pull the ladder rope to raise the top section two or three rungs at a time and engage the locks after each pull. Exercise care to prevent injury to the hand holding the side rail. Notice that when the rope is pulled around the side rail rather than directly down the middle, there is not the same tendency to pull the ladder over too far to an unstable position.

8.03 After locking the top section, allow the top of the ladder to move slowly toward the support. After the ladder is in place against the support, tie the ladder rope securely to one of the rungs of the bottom section with a clove hitch and two half-hitches.

8.04 As an alternate method after the ladder has been raised to an upright balanced position on a firm footing, balance the ladder with one hand and move behind the ladder in position to operate the ladder rope with the other hand, as shown in Fig. 28.



Fig. 28—Extending Top Section

8.05 Pull the ladder rope to raise the top section two or three rungs at a time engaging the locks after each pull. Exercise care to prevent the lower guide iron from striking the hand holding the side rail. Lock in place as described in 7.12.

LOWERING TOP SECTION OF 20- TO 28-FOOT LADDERS

8.06 While standing at the base of the ladder, untie the ladder rope and bring the free end of the rope around the side rail. Block the ladder at the base with one foot, then grasp the side rails and pull the top of the ladder away from the support until it is in an upright balanced position as shown in Fig. 27.

8.07 While holding the bottom section side rail with one hand, raise the upper section about 6 inches by means of the ladder rope in order to release the ladder locks. Allow the upper section to descend slowly by applying the necessary drag on the rope. The drag on the rope should hold

the ladder in the balanced position. Exercise care to prevent injury to the hand holding the side rail. Do not allow the top section to strike the ground or pavement sharply.

8.08 As an alternate method pull the ladder away from the support until it is in an upright balanced position as described in 8.06. From a position behind the ladder (Fig. 29), raise the top section sufficiently to disengage the locks.



Fig. 29—Top Section Extended

8.09 Lower the top section carefully, engaging the locks each time a new hold is taken on the rope. Take care to avoid letting the guide iron strike the hand on the side rail. Do not let the top section strike the ground or pavement sharply.

RAISING AND/OR LOWERING TOP SECTION OF 32-TO 40-FOOT LADDERS

8.10 One craftsman shall hold the side rails of the lower section on the front side of the ladder during the raising and lowering of the upper section by another craftsman. Exercise care to prevent the ladder guide irons from striking and injuring the hands of the craftsman holding the side rails. The positions to be taken by the craftsmen are shown in Fig. 30. The ladder is raised by the second craftsman as outlined in 8.05.

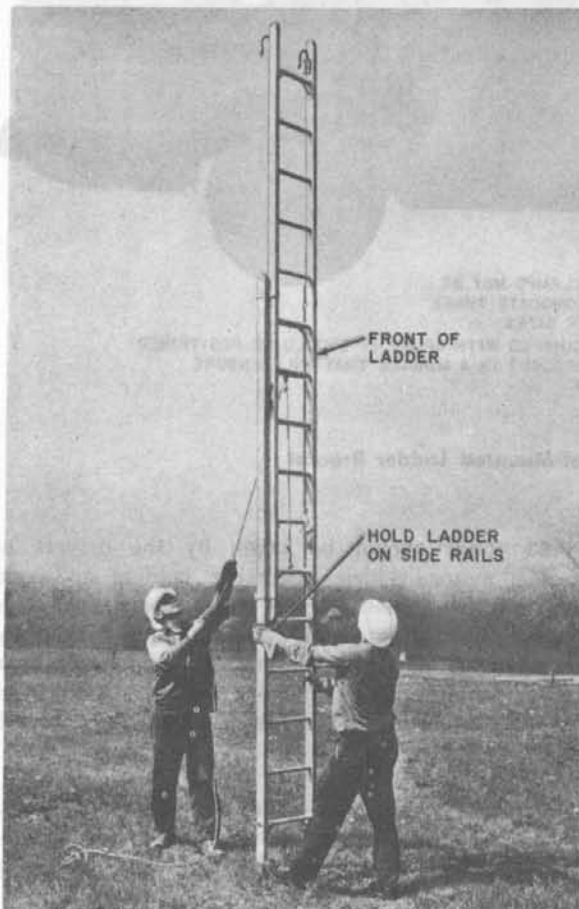


Fig. 30—Two-Man Method of Extending Top Section

8.11 The craftsman holding the ladder shall keep his feet and legs clear of the side rails and bottom rung of the upper section while it is being lowered. The craftsman lowering the top section shall check its downward movement with the ladder rope so that the top section does not strike the ground or pavement sharply.

9. TRANSPORTING

ON MOTOR VEHICLES

9.01 When transporting ladders on trucks or other motor vehicles, always fasten them securely in their proper position with straps or other devices provided for the purpose. Never use wire for securing a ladder to the brackets of a truck. A ladder hanging loosely on the brackets of a truck will soon be marred, cracked, and weakened by road shocks.

9.02 When the motor vehicle is equipped with a roof bracket, place the ladder on the bracket as follows.

- (1) Place the ladder against the vehicle in the manner illustrated in Fig. 31.
- (2) Assume a position at the side of the vehicle, facing the rear, with the back of the ladder adjacent to the vehicle.
- (3) Lower the base of the ladder to the ground and position the top portion of the ladder behind the rolled upright portion of the outside side rail assembly as shown in Fig. 31.
- (4) Raise the base of the ladder and place it in position in the ladder bracket.
- (5) Turn the locking handle upward to lock the ladder in place as shown in Fig. 32.

Note: The steps outlined in 9.02 are for a typical roof-mounted ladder bracket. Other types of ladder brackets are available and the method of placing ladders in these brackets may vary.



Fig. 31—Placing Ladder on Roof-Mounted Ladder Bracket



Fig. 32—Ladder Locked in Position on Roof-Mounted Ladder Bracket

9.03 Care should be taken by the drivers of motor vehicles carrying ladders to avoid letting the ladders strike trees, posts, walls, or other objects, especially when backing or turning corners. If it is known that the ladder has been subjected to a shock, make a careful inspection of the ladder, before it is used, in accordance with Part 10.

9.04 If an extension ladder extends an abnormal distance beyond the rear of a motor vehicle, attach a warning flag or light to the projecting end of the ladder.

ONE MAN METHOD

9.05 Carry extension ladders in the closed position with the spurs downward and to the front and ladder hooks, if present, rotated into the plane

of the rungs between the side rails. Secure the end of the ladder rope by tying it with a clove hitch around one rung of the top section and the adjacent rung of the bottom section.

- 9.06** To carry an extension ladder, first place it in the vertical position with the side rails

of the bottom section on the outer side. Tilt the ladder until the bottom section side rail rests against the chest and shoulder, then lift the ladder to the shoulder until the exact point of balance is obtained. The proper carrying method is shown in Fig. 33.

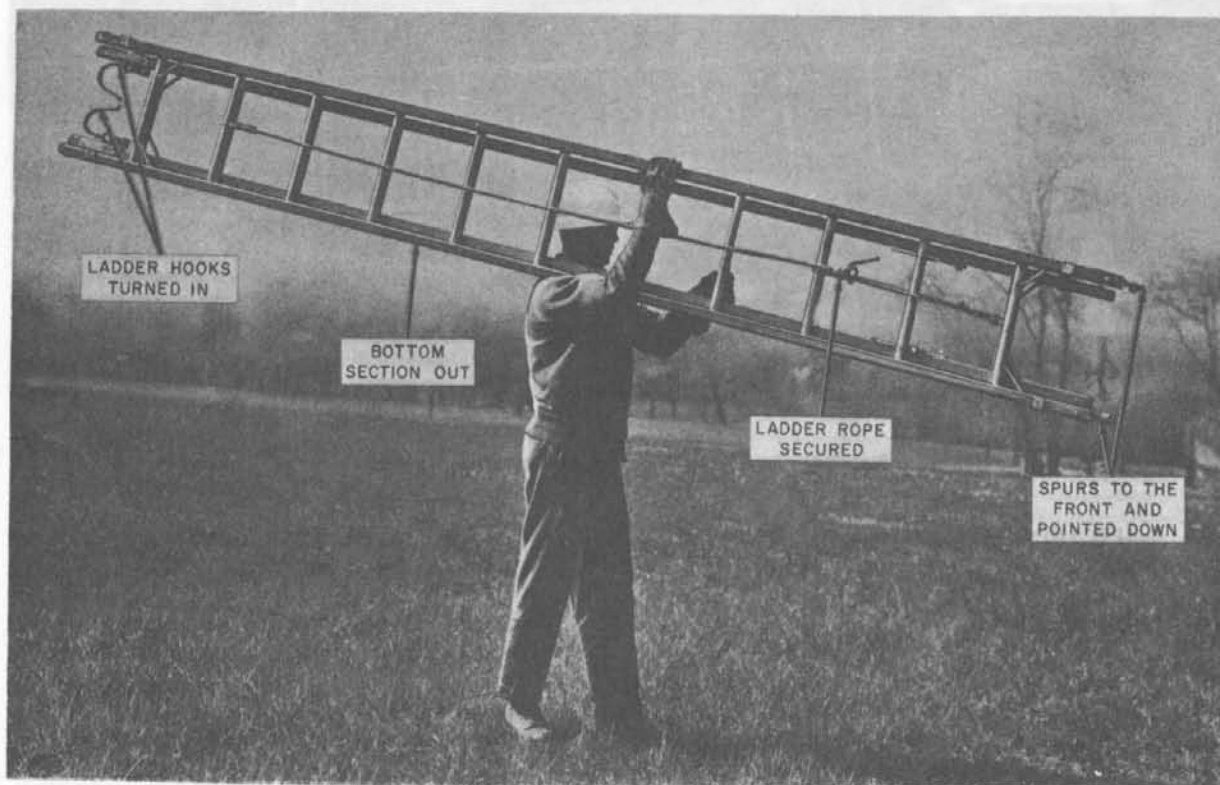


Fig. 33—One-Man Method of Carrying Ladder

- 9.07** Do not lift or carry a ladder by grasping the ladder rope.

TWO MAN METHOD

- 9.08** Before carrying the ladder, secure the free end of the ladder rope with a clove hitch around one rung of the top section and the adjacent

rung of the bottom section. Rotate the ladder hooks, if present, into the plane of the rungs, between the side rails.

- 9.09** To pick up a ladder, the two men take positions at opposite ends and, lifting together, lift the ladder to the position shown in Fig. 34. Carry the ladder with spurs forward.

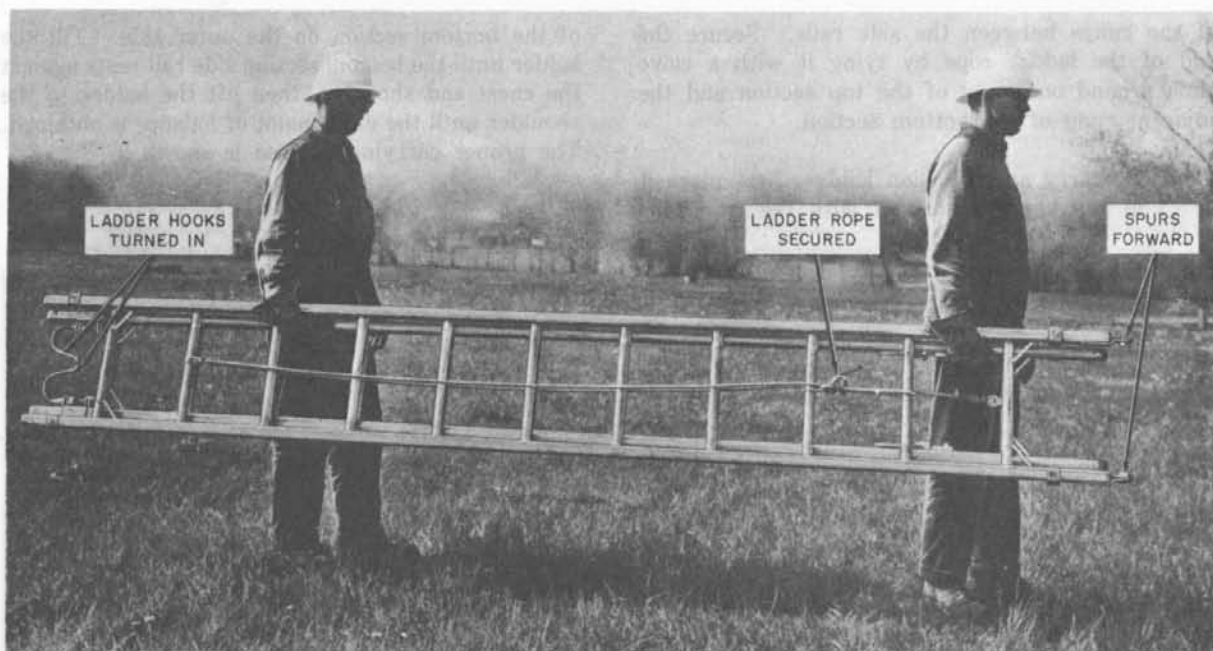


Fig. 34—Two-Man Method of Carrying Ladder

10. INSPECTION, MAINTENANCE, CARE AND STORAGE

INSPECTION ROUTINE

10.01 Each person using a ladder shall determine that it is in good condition and that its appearance indicates neither deterioration nor damage sufficient to affect its strength. Ladders not in storage shall be examined visually once each week as outlined in 10.06 through 10.22. Should such an examination reveal a split, splinter, delamination (D Extension Ladder), etc, in a side rail, the sections shall be inspected as outlined in 10.06 through 10.10. The sections shall also be examined under the prescribed dead-weight load inspection at six-month intervals or in the event the ladder has been dropped or has otherwise been abused or damaged.

10.02 The definitions of some terms used in inspecting ladders are as follows:

- **Cracks** are fractures across the lengthwise fibers of the wood resulting usually from mechanical stresses.

- **Decay** is disintegration of the wood due to action of wood-destroying fungi.
- **Splits** are lengthwise separations of the wood extending in the direction of the grain.
- **Delamination** is separation of plys in the laminated side rails of D Extension Ladders.

10.03 The inspection of extension ladders shall be made when the wood is dry. Absorption of considerable moisture causes swelling which tends to conceal defects.

10.04 The supervisor shall inspect the ladders used by his forces at least every two months. Inspection under dead weight load may be omitted in this inspection.

10.05 The supervisor shall see that the craftsmen comply with the inspection routine.

METHOD OF INSPECTION

10.06 Examine the ladder to determine the condition of all of its parts. In order to facilitate careful inspection, place the ladder at a

convenient height in a well lighted area. *If any defects are found which cannot be taken care of by the craftsman or if the condition is such that there is doubt about the ladder being safe to use, exchange it at once, in accordance with local routine, for one in good condition.*

10.07 Separate the ladder sections and place *one section at a time* on two supports located a few inches from the ends of the side rails. These supports should be of a height which will permit the craftsman to examine the underside of each rail thoroughly.

10.08 Place a weight of approximately 100 pounds at a point approximately 2 feet from one end support. The weight should be supported approximately evenly by the two side rails. Examine the under edges and the faces of each rail carefully for signs of the defects described in 10.11 through 10.19. Particular attention should be given to the points where the rungs are joined to the side rails, as these are points where fractures are most likely to occur.

10.09 Repeat the operation in 10.08 with the weight placed at the midpoint of the ladder section and again with the weight placed about 2 feet from the other support.

10.10 Turn the section over and repeat the inspections outlined in 10.08 and 10.09 above. *The suggested loading is not a strength test of the section, but rather a means for disclosing defects and, therefore is of no significance unless a careful visual examination is carried out while the section is under load.* Under no circumstances shall an *extended* ladder be inspected in this manner nor shall a weight appreciably in excess of the specified 100 pounds (such as the weight of a person) be applied to a ladder section being inspected.

DEFECTS TO LOOK FOR ON EXTENSION LADDER RAILS

10.11 Look for damage to the rails which may appear as a fine crack, as a fold or crease in the wood fibers, or as a splintering of the wood fibers. Such defects are usually caused by overloading the ladder or subjecting it to a hard blow either by dropping or through some other accident and may subsequently result in failure of the ladder under normal load. Cracks or fine wrinkles (compression failure) in the wood fibers

are most likely to occur at rung positions and a very careful inspection is usually required to detect them. In most instances the wrinkles or creases appear alone, but in some cases there may also be some splintering of the wood fibers in the opposite side of the rail (Fig. 35).

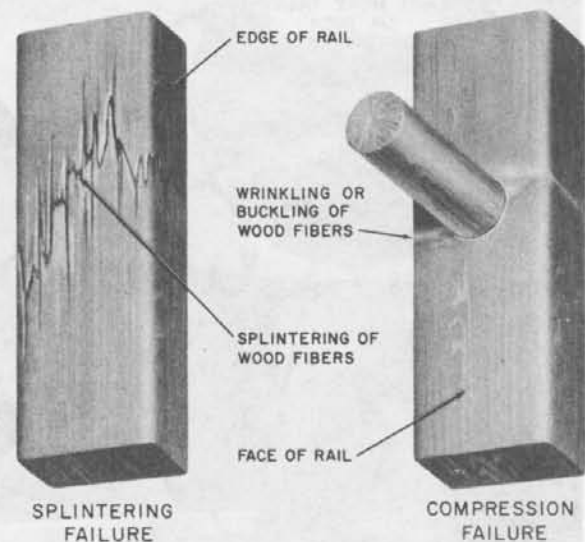


Fig. 35—Defects in Side Rails

10.12 Splits that extend into an edge of a side rail and cannot be removed by dressing without reducing the original rail width by more than 3/8-inch are cause for rejection.

10.13 Splits extending from one face of the rail through to the opposite face which are more than 24 inches in length or that result in loosening of rungs are cause for rejection.

10.14 Badly splintered rails that would require the original width of the rail to be reduced more than 1/2-inch by dressing to remove the projecting fibers are cause for rejection. Remove all splinters as they appear and dress the rail with a wood rasp, file, knife, sandpaper, or other suitable means.

10.15 Worn, crushed, or excessively indented rails are cause for rejection. (Top or bottom edge of narrow side worn or depressed 3/8-inch or less is permitted.)

10.16 Decay, particularly where rungs join side rails, is cause for rejection.

10.17 Check for excessive longitudinal play in side rails (more than 3/4-inch). This is due

to looseness of the rungs and rung braces and may be measured as shown in Fig. 36.

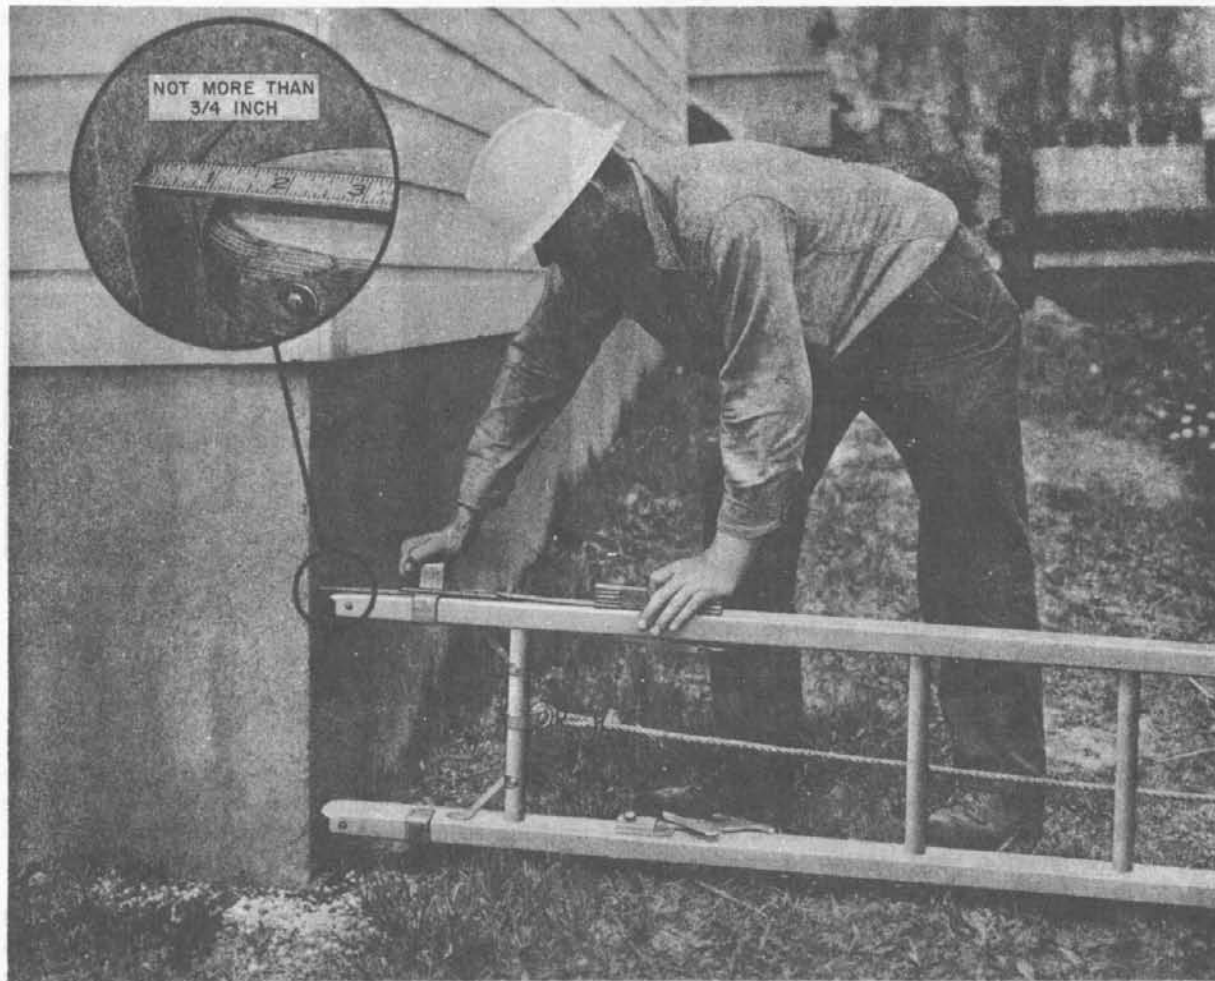


Fig. 36—Measuring Longitudinal Play in Side Rails

10.18 Check for protruding nails. These shall be driven flush and set with a nail set.

10.19 Check for delamination in the laminated side rails on D Extension Ladders. Inspect for evidence of delamination of the veneer layup strips and the laminated facing strips.

DEFECTS TO LOOK FOR ON EXTENSION LADDER RUNGS

10.20 Check for cracked, split, badly splintered, or decayed wooden rungs (splits, 6 inches or less in length, are permitted) or bent aluminum rungs. Sometimes a rung is broken in the tenon

which is mortised in the side rail. Such a defect is not visible but may be detected by rapping the rung near each side rail with a hammer handle and comparing the sound with that obtained from striking other rails. Do not strike rungs with head of hammer.

10.21 Excessively worn rungs (less than 7/8-inch diameter on C ladders), loose or missing rungs, or severely bent rungs (D ladders) are cause for rejection.

DEFECTS TO CHECK FOR ON EXTENSION LADDER FITTINGS

10.22 Following are defects to look for on ladder fittings. Such defects are cause for rejection.

- (a) Broken, badly bent, or cracked guide irons.
- (b) Loose rivets. Where practical, loose rivets should be tightened on the job by placing the head of a lineman's hammer or other heavy metallic object against the head of the loose rivet. Peen the other end of the rivet with a ball peen hammer until the rivet holds tightly. If this does not correct the condition, replace the ladder in accordance with the locally established routine.
- (c) Broken locks or improper action of locks. The spring shall function to keep the hook in position to engage the rung.
- (d) Excessively worn, seriously frayed, or rotted ladder rope. Replace the rope, attaching it to the ladder by means of a rope eye splice.
- (e) Broken, cracked, or badly distorted ladder hooks.
- (f) Broken, badly worn, or otherwise defective spurs.
- (g) Broken or defective braces.
- (h) Broken or defective pulley (the pulley sheave shall revolve freely).

- (i) Broken or defective pulley shackle (never use wire as a substitute for the shackle).

CARE OF LADDERS

10.23 The standard extension ladders have been designed to have a minimum weight consistent with ample strength. If properly handled and cared for, a ladder can be used for a considerable time without repairs or replacement. Craftsmen using extension ladders shall maintain them in accordance with the instructions given in this section. Extension ladders requiring repairs which cannot be made on the job shall be returned to the storeroom and repaired under the company's established routine.

10.24 When lowering the top section of a ladder, check its downward movement with the extension rope so that the top section does not strike the ground or pavement sharply.

10.25 A craftsman shall not attempt to lower a ladder which is longer than 32 feet unless he has assistance. Dropping a ladder for even a short distance to the ground may damage the side rails which may subsequently result in breakage of the rails under normal loads.

10.26 Never use a ladder as a skid.

10.27 Keep ladder rails free from splinters. Splinters may be removed by dressing with a rasp, knife, sandpaper, or other suitable means.

STORAGE OF LADDERS

10.28 Ladders that are not being used shall be stored where they will not be exposed to the elements but where there is good ventilation. Never store ladders near radiators, stoves, steam pipes, or in places where the wood may be subjected to excessive heat or dampness. Such conditions bring about extreme changes in the moisture content of the wood causing the wood to split or crack, and the rungs and hardware to become loose.

10.29 Store ladders to provide ease of access for inspection and to prevent danger of accident when withdrawing a ladder for use.

10.30 Where ladder racks have not been provided, store ladders in a vertical position. Where this is not practical, lay the ladders in a horizontal position, one on the other. Place wooden spacers between the floor and the lower ladder and between ladders to prevent side rails from becoming damaged by guide irons. Do not store ladders in any position where there is a chance of pressure being placed on them that might cause warping or twisting. Not more than six ladders should be placed in one stack. Heavy objects shall not be permitted to rest on ladders in storage.

10.31 Ladders stored in a horizontal position should be supported at a sufficient number of points (at least 3 points for 20- and 24-foot ladders and 4 points for the longer ladders) to avoid sagging and permanent set.

CLEANING AND TREATING EXTENSION LADDERS

10.32 Keep ladders free from dirt, paraffin, oil, tar, etc, where practical. A paraffin coating on wood or aluminum is slippery and may cause an accident. To remove paraffin from the ladder, first scrape the excess off with a shave hook or other edged tool and then rub the surface vigorously with a rag moistened with B Cleaning Fluid.

CARE OF LADDER LOCKS AND PULLEY

10.33 Keep locks, springs, and pulleys on extension ladders lubricated by applying oil sparingly on the movable parts at least once a month. This will not only make them operate more easily but will also add to their service life. See that locks are securely fastened to the side rails. Test each spring to see that it is capable of returning the catch to position. Examine the keeper to see that it operates properly. See that the pulley is held securely at the middle of the rung.

10.34 One type of lock with which standard ladders are equipped is shown in Fig. 37.

CARE OF WHEEL SPURS

10.35 To adjust a worn or dull wheel spur, remove the nut, lockwasher, and shoulder bolt. Rotate the toothed wheel 90 degrees, bringing the unused portion of the wheel in position for use. Replace the bolt with the shoulder properly seated in the plate and wheel. Replace the lockwasher and nut and tighten securely.



Fig. 37—Spring Lock

10.36 Do not change the position of a wheel spur on only one side of ladder; always change both, even though one is not badly worn. Wheel spurs are illustrated in Fig. 38.

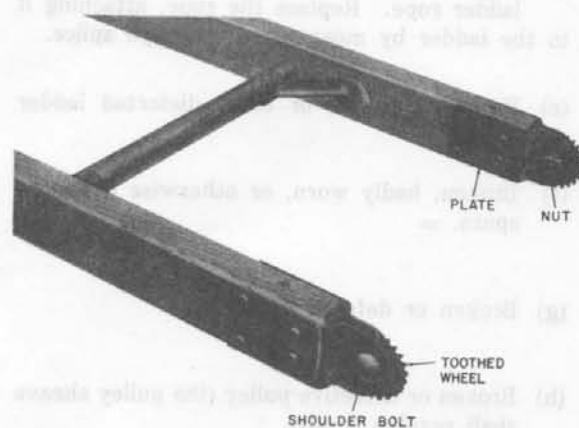


Fig. 38—Wheel Spurs

DISPOSITION OF DEFECTIVE LADDERS

10.37 Sections of ladders which have developed major defects shall be removed from service for repairs or destruction. Craftsmen in the field shall see that such ladder sections in their possession are returned to the storeroom tagged or marked ***Dangerous, Do Not Use*** and, if practical, the ladder shall be marked to show the location of

the defect. If the company has established the practice, craftsmen in remote locations which do not have storeroom facilities shall destroy and dispose of junk ladders on the job when instructed to do so by the supervisor. Sections of ladders with broken side rails or broken rungs shall be considered junk unless they are required in connection with an investigation that may be made to determine the cause of an accident or a ladder failure.