

LIBRARY
FBI - NEW YORK

3.01 The C quadrant block can be used in place of the C, M, or T cable sheaves in the D pulling frame or the C cable sheave shackle and can be used in place of the C manhole sheave on the edge of a manhole opening.

Sheave assembly (including bearings) for C quadrant block.

Page 1

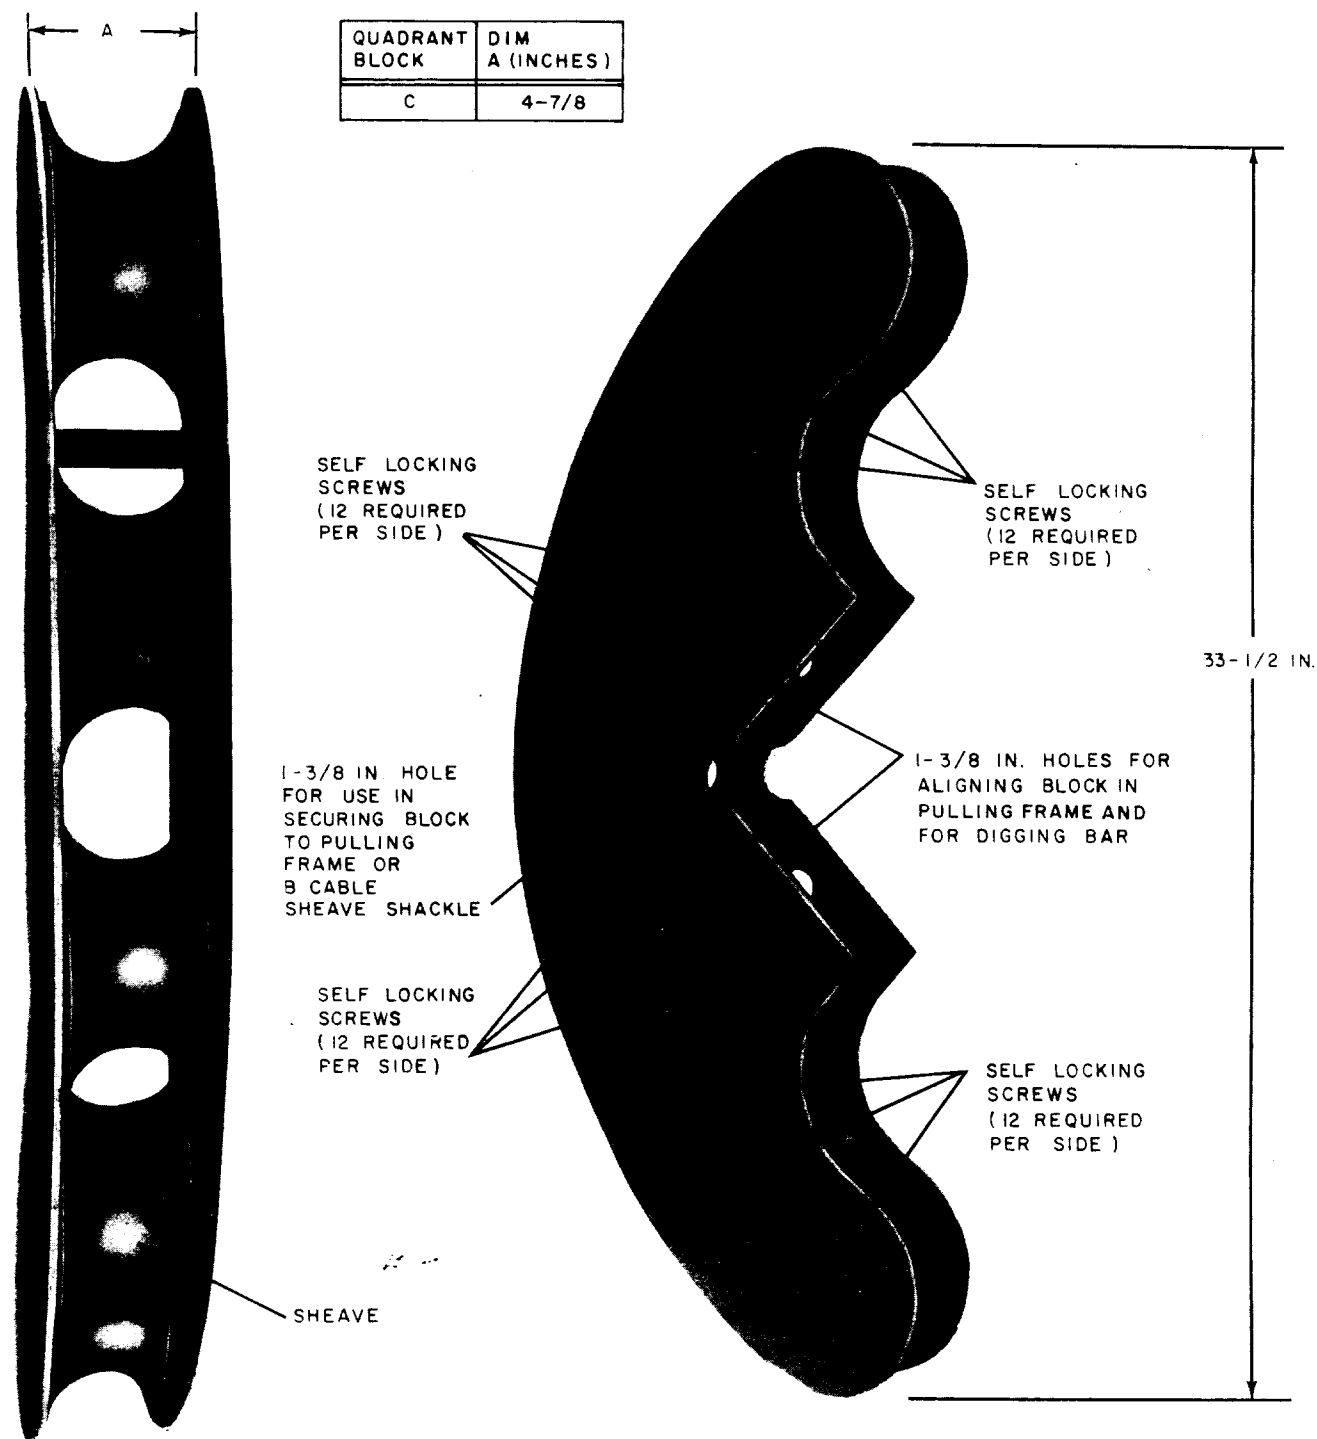


Fig. 1—C Quadrant Block


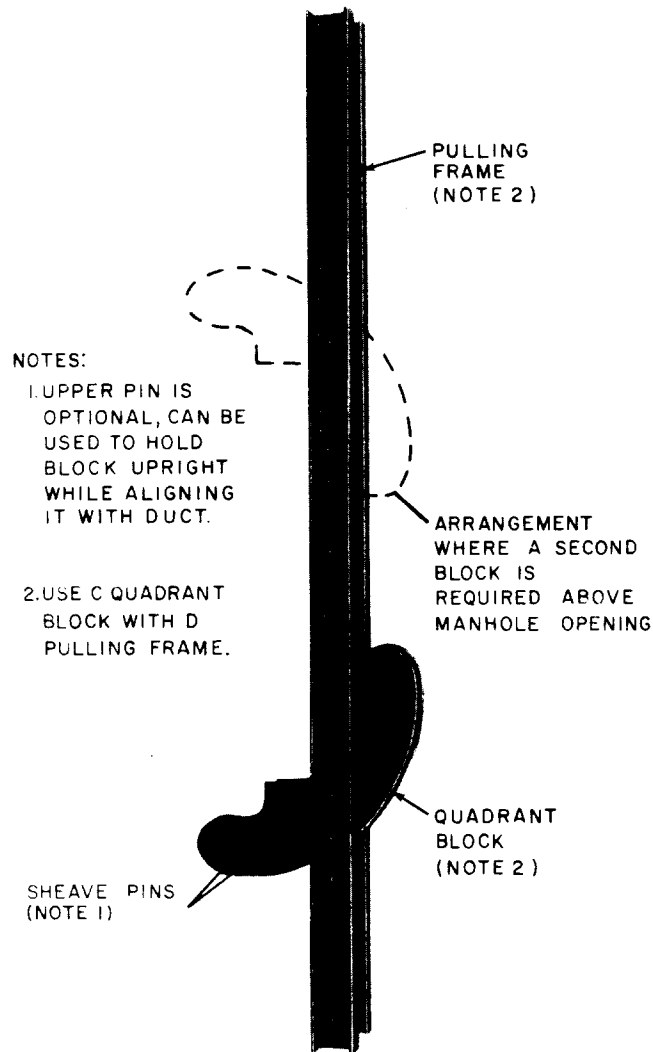


Fig. 2—Quadrant Block Installed in Pulling Frame

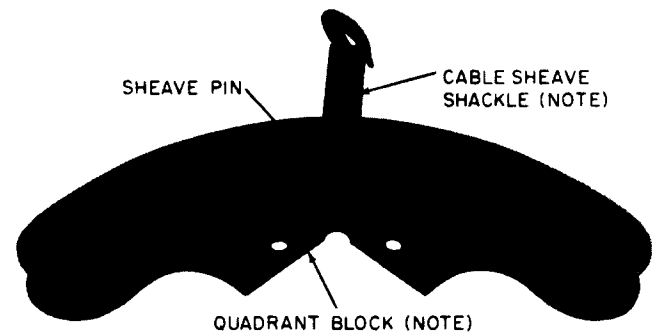

NOTE:
USE C CABLE SHEAVE SHACKLE WITH C QUADRANT BLOCK.

Fig. 3—Cable Sheave Shackle Attached To Quadrant Block

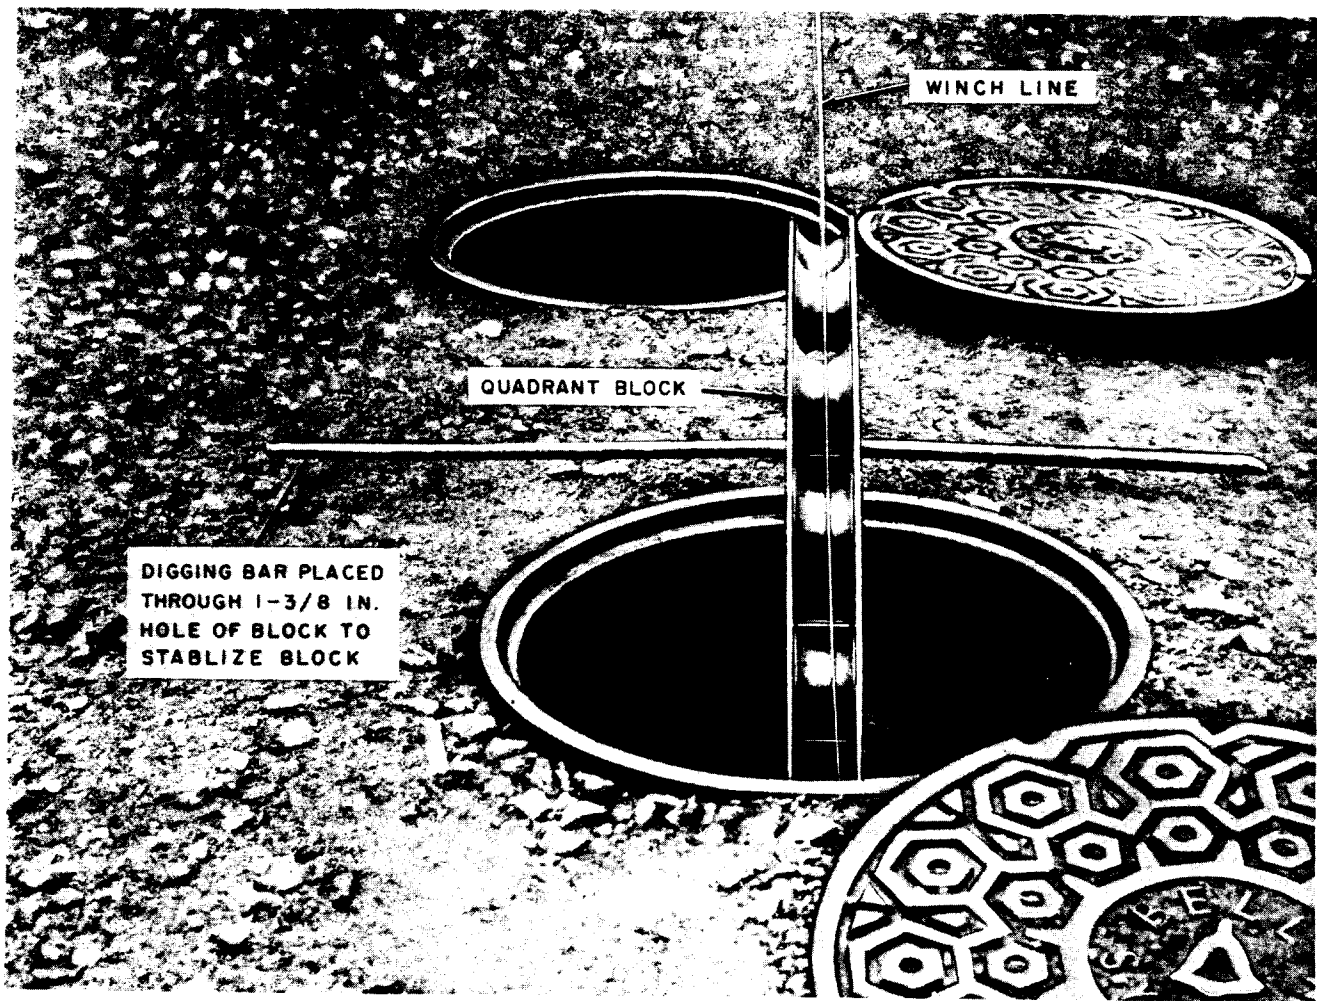


Fig. 4—Quadrant Block Positioned on Edge of Manhole