

SUBSCRIBER SETS — 686A

USED WITH HANDSETS

CONNECTIONS

1. GENERAL

1.01 This section is reissued to:

- Change [S-BR] strap between *C* termination on 425E network and terminal 2 of terminal strip to a (BR) strap.
- Delete connection information on the 425A electron tube (4-element). This information is covered in Section 500-112-100.

2. CONNECTION INDEX

Table A — Associated Apparatus

Table B — Connections

Fig. 1 — Circuit Diagram For Connection
With Hand Telephone Sets

TABLE A**ASSOCIATED APPARATUS**

CLASS OF SERVICE	HAND TEL SETS	
	HANG-UP TYPE	DESK-TYPE
4-Party Full Selective	201A, B, C, D 211A, B, C, D, J, L 212A, B, C, L 213A, B, C, E	202A, B, C, D 203A, B, C, D, E, F 215A, B, C, D
or		
8-Party Semiselective		

TABLE B
CONNECTIONS

WIRE OR LEAD		COLOR	NEGATIVE (—) PARTIES		POSITIVE (+) PARTIES	
			RING STATION 1 AND 5	TIP STATION 2 AND 6	RING STATION 3 AND 7	TIP STATION 4 AND 8
Mounting Cord or Local Wiring		(G) (R) (BK) (Y) (YY or R)	GN* R* B* L2 2	GN* R* B* L2 2	GN* R* B* L2 2	GN* R* B* L2 2
Straps Network to Terminal Strip		(BR)[S-BR] (BL)	2 to C* RR* to L1	2 to C* RR* to L1	2 to C* RR* to L1	2 to C* RR* to L1
Ringer Lead		(S) (BK) (R) (S-R)	A* G G K*	A* G G K*	A* L2 L2 K*	A* L2 L2 K*
426A Tube Lead (3-element)		(BK) (Y) (R)	K* L2 L1	K* L2 L1	K* G L2	K* G L2
Inside Wire From Protector or Line	Ring	(R)	L2	L1	L2	L1
	Tip	(G)	L1	L2	L1	L2
	Grd	(Y)	G	G	G	G

*Terminals on 425E network.

() Current color code.

[] MD color code.

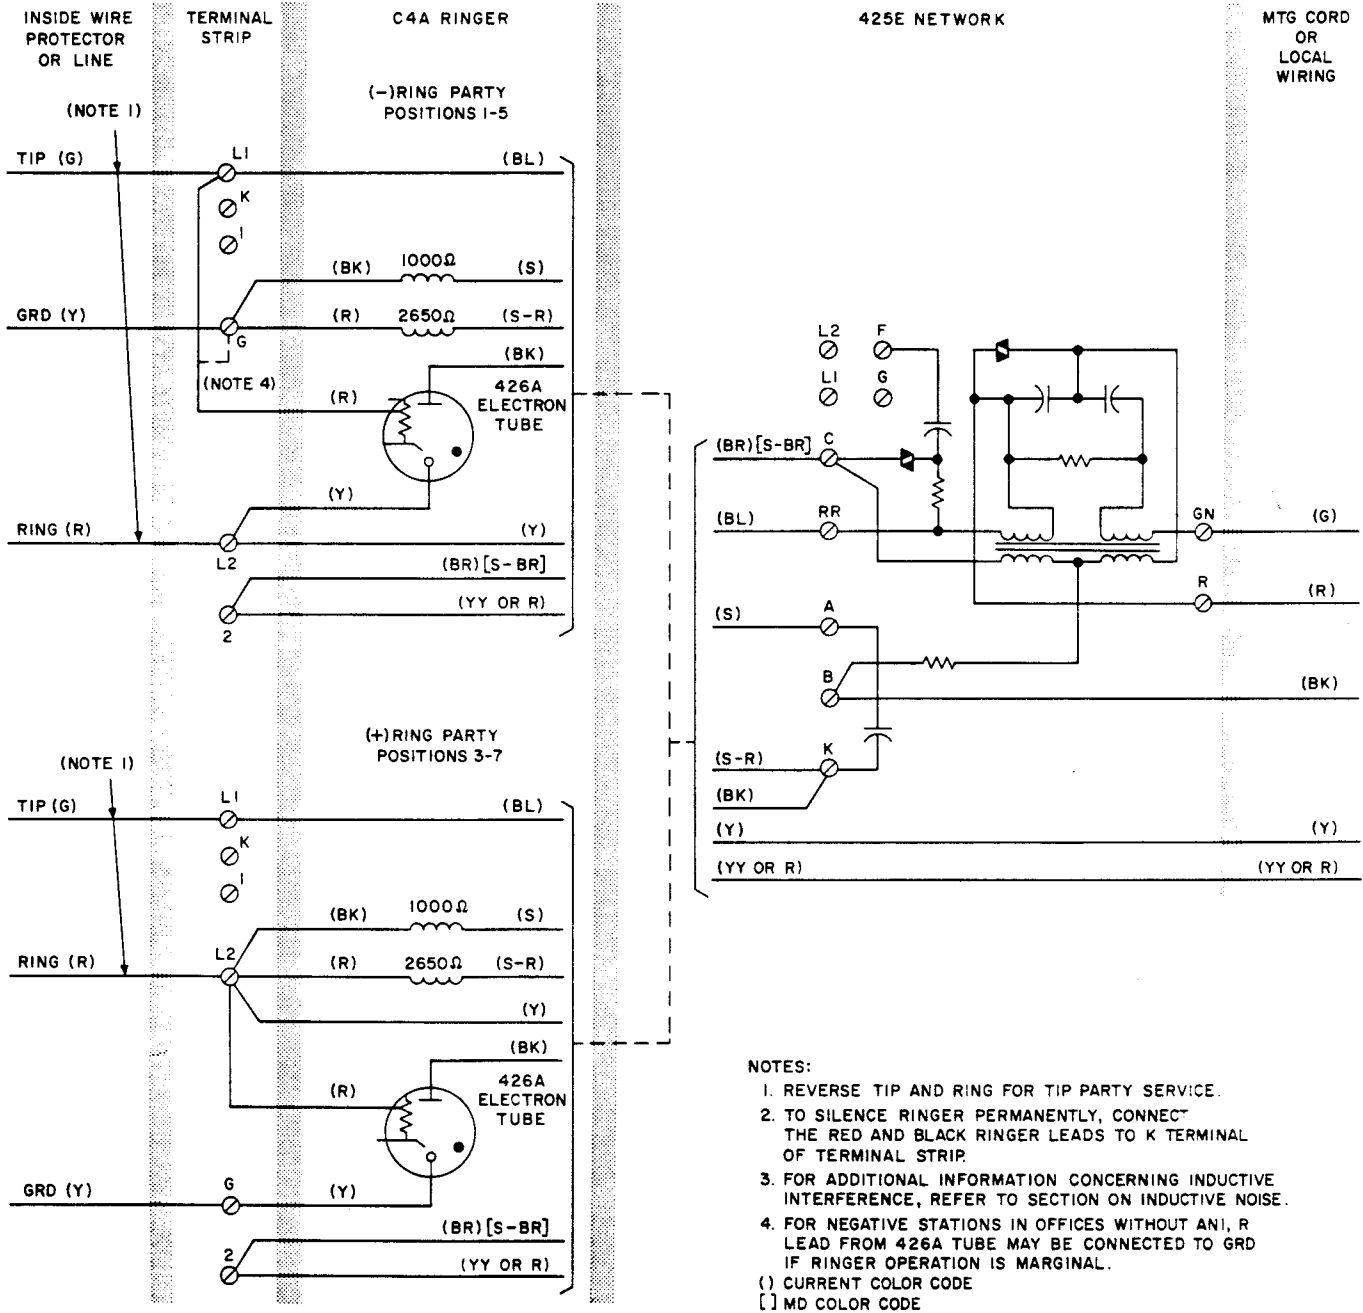


Fig. 1 — Circuit Diagram For Connection With Hand Telephone Sets