


# SERVICE

## 1753 TELEPHONE SETS

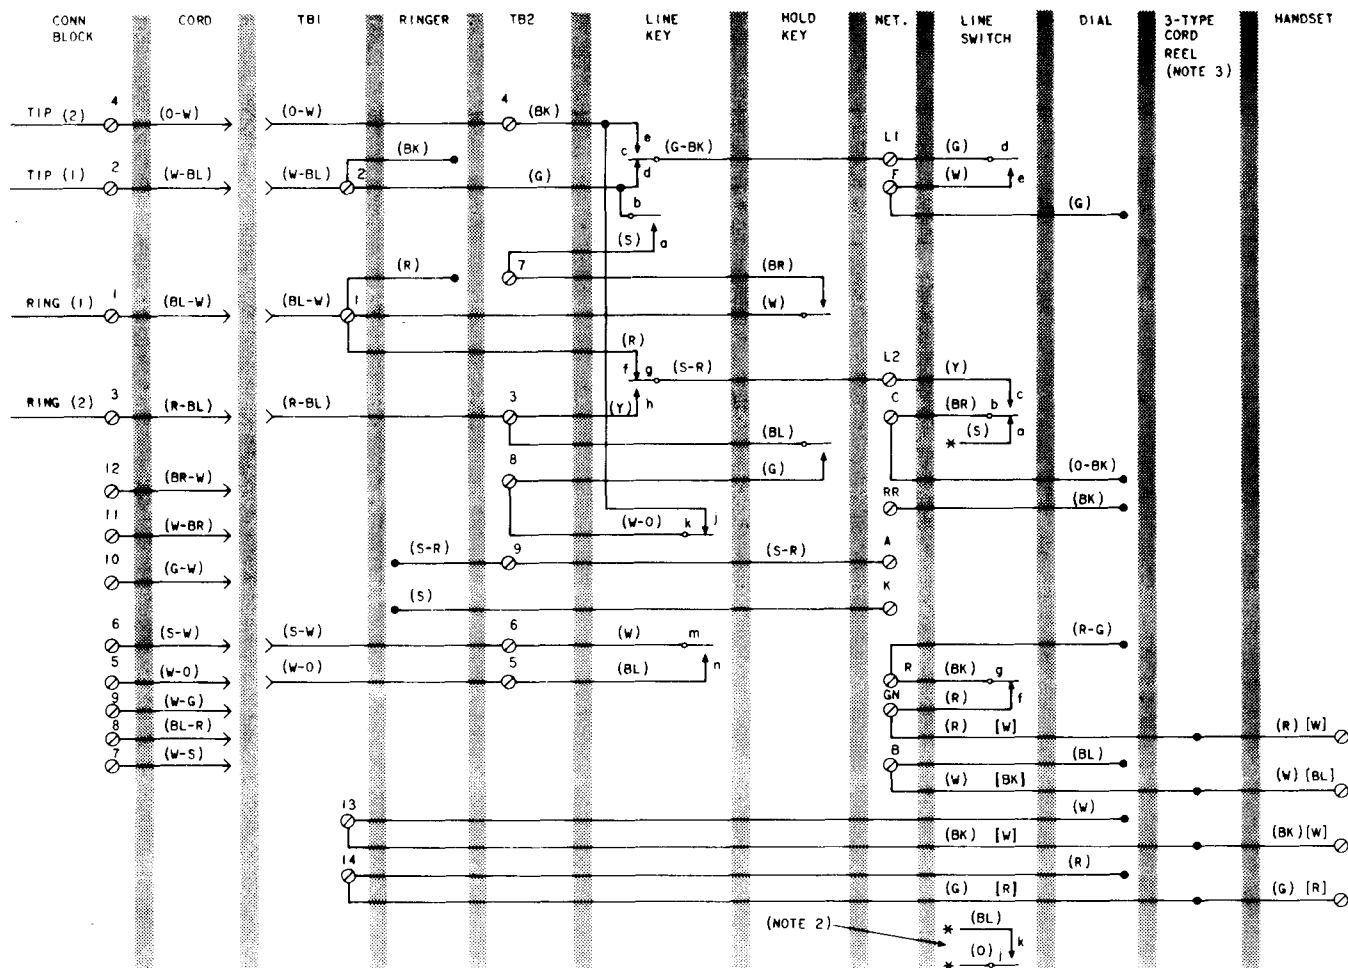

NOTES:

1. CONNECTIONS PROVIDE FOR RINGING ON LINE 1.  
FOR RINGING ON LINE 2, MOVE (R) AND (BK)  
RINGER LEADS TO TERMINALS 3 AND 4.
2. (BL) AND (O) LINE SWITCH LEADS AND ASSOCIATED  
CONTACTS WILL BE DELETED IN LATER PRODUCTION  
MODELS.
3. ( ) 3B CORD REEL  
[ ] 3A CORD REEL
- \* INSULATED AND STORED.

Fig. 1—1753-Type Telephone Set Connections With 25A3 Dial


**TABLE A**  
**POLARITY GUARD CONNECTIONS**  
**(P-90D060 GUARD ASSEMBLY)**

WIRE OR LEAD		REMOVE FROM	CONNECT TO	
		NET.	POLARITY GUARD	NET.
Dial	(BK)	RR	T	
Line Switch	(BR)	C	S	
Polarity Guard	(G)			RR
	(W)			C

**Note:** For use when specified by local instructions for end-to-end signaling installations.



*The 3A cord reels shall be used when the telephone set is subjected to temperatures below 40 degrees F. The 3B cord reel shall be used when the telephone set is not subjected to temperatures below 40 degrees F.*

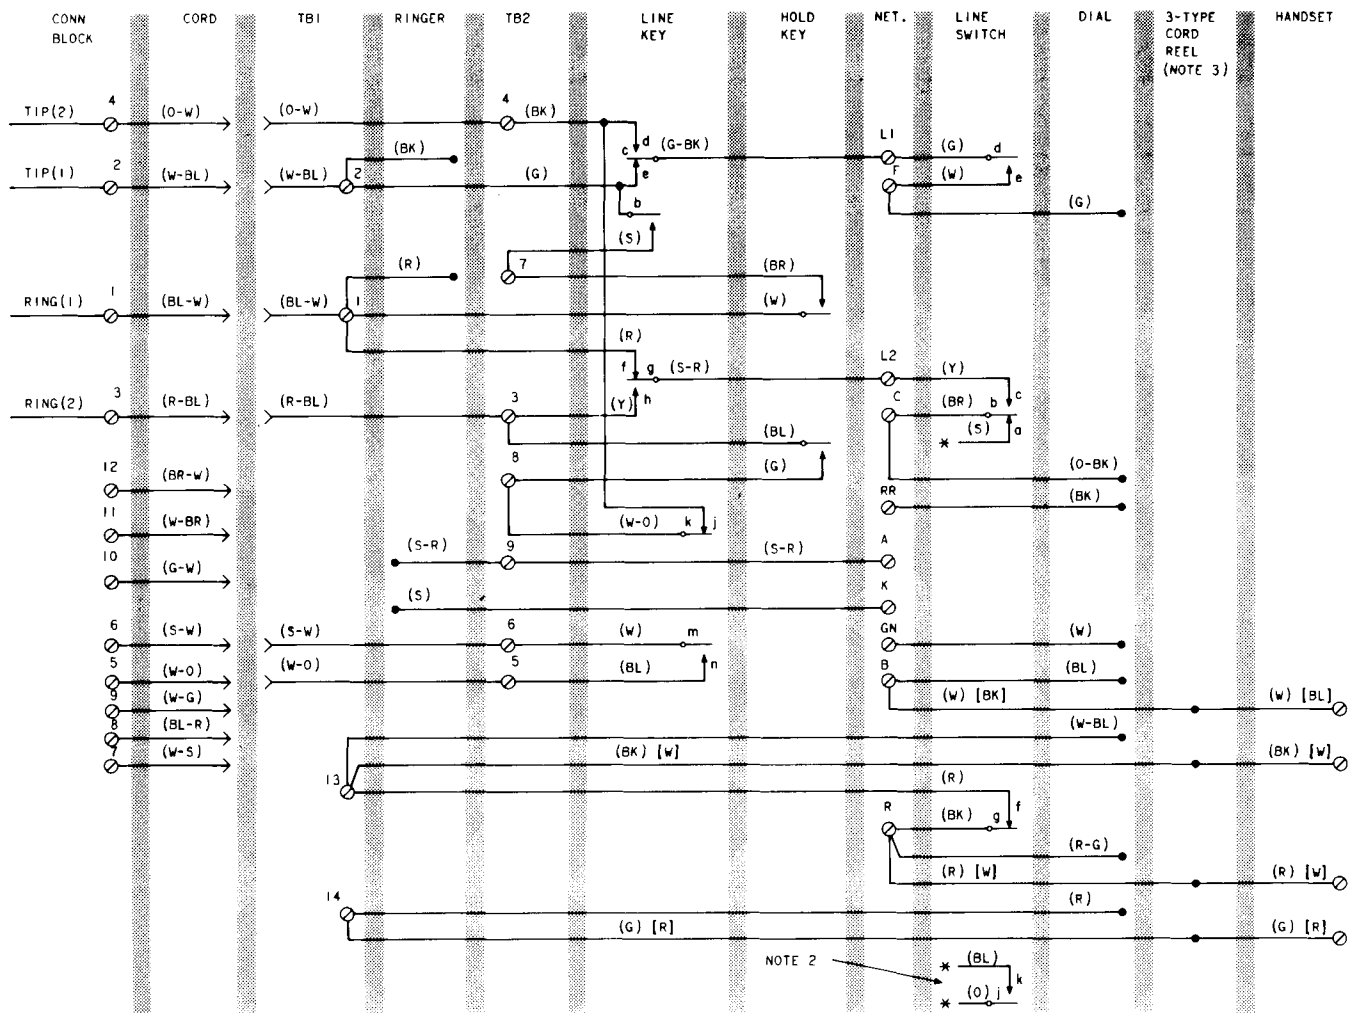

## NOTES:

1. CONNECTIONS PROVIDE FOR RINGING ON LINE 1. FOR RINGING ON LINE 2, MOVE (R) AND (BK) RINGER LEADS TO TERMINALS 3 AND 4.
  2. (BL) AND (O) LINE SWITCH LEADS AND ASSOCIATED CONTACTS WILL BE DELETED IN LATER PRODUCTION MODELS.
  3. ( ) 3B CORD REEL  
[ ] 3A CORD REEL
- \* INSULATED AND STORED.

Fig. 2—1753-Type Telephone Set Connections With 25W3 Dial