
TELEPHONE SETS — 1500 D CONNECTIONS

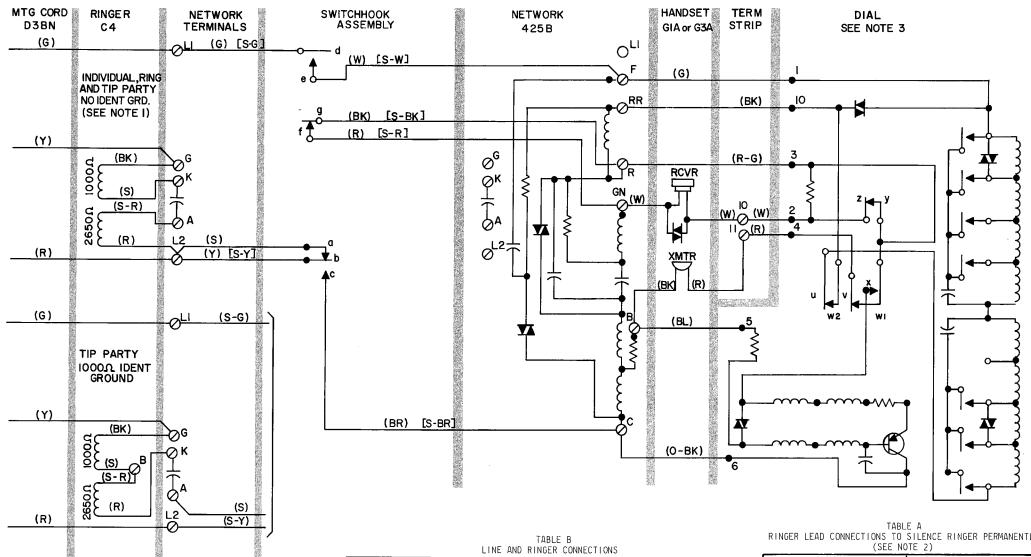

INDIVIDUAL

OR

BRIDGED

L2

L1

G

L2

Α

R

R

(S) [S-R]

(W) [S-W]

BR)[S-BR]

WIRE OR LEAD

MOUNTING CORD

IN SET

RINGER

LEADS

SW1TCHH00k

MOUNTING CORD

AT CONNECTING

BLOCK

RING

TIP

LINE WIRE

AT CONNECTING

BLOCK

LEADS

RING

PARTY

L2

L1

Δ

NO

IDFY

GRD

L.2

L1

L1

Α

F

G

Υ

R

(G)

(Y)

(R)

TIP PARTY

2650 Ω IDENT

GROUND

(S-G)

(S)

(S-Y)

TIP PARTY

1000

L2

IDENTIFYING GROUND

2650

L2

<u>L1</u>

В

RINGER LEAD CONNECTIONS TO SILENCE RINGER PERMANENTLY (SEE NOTE 2)

TIP PARTY IDENTIFYING GROUND	RINGER LEAD			
OHMS	RED	BLACK	SLATE	S-RED
1000	К	G	В	К
2650	В	К	К	G

NOTE 1: FOR TIP PARTY WITH NO IDENTIFYING GROUND: MORE (R) RINGER LEAD FROM L2 TO L1 AT NETWORK AS SHOWN IN TABLE A.

NOTE 2: CONNECT YELLOW MOUNTING CORD LEAD TO SAME TERMINAL AS RED MOUNTING CORD LEAD AT CONNECTING BLOCK FOR ALL CLASSES OF SERVICE EXCEPT THOSE LISTED IN TABLE B.

NOTE 3: THE 1500D IS EQUIPPED WITH A 25A3 DIAL.

- () INDICATES CURRENT COLOR CODE
- [] INDICATES MD COLOR CODE

Fig. 1 - 1500D Telephone Set, Connections