

TELEPHONE SETS—500J, K AND 501J, K COMMON BATTERY — CONNECTIONS


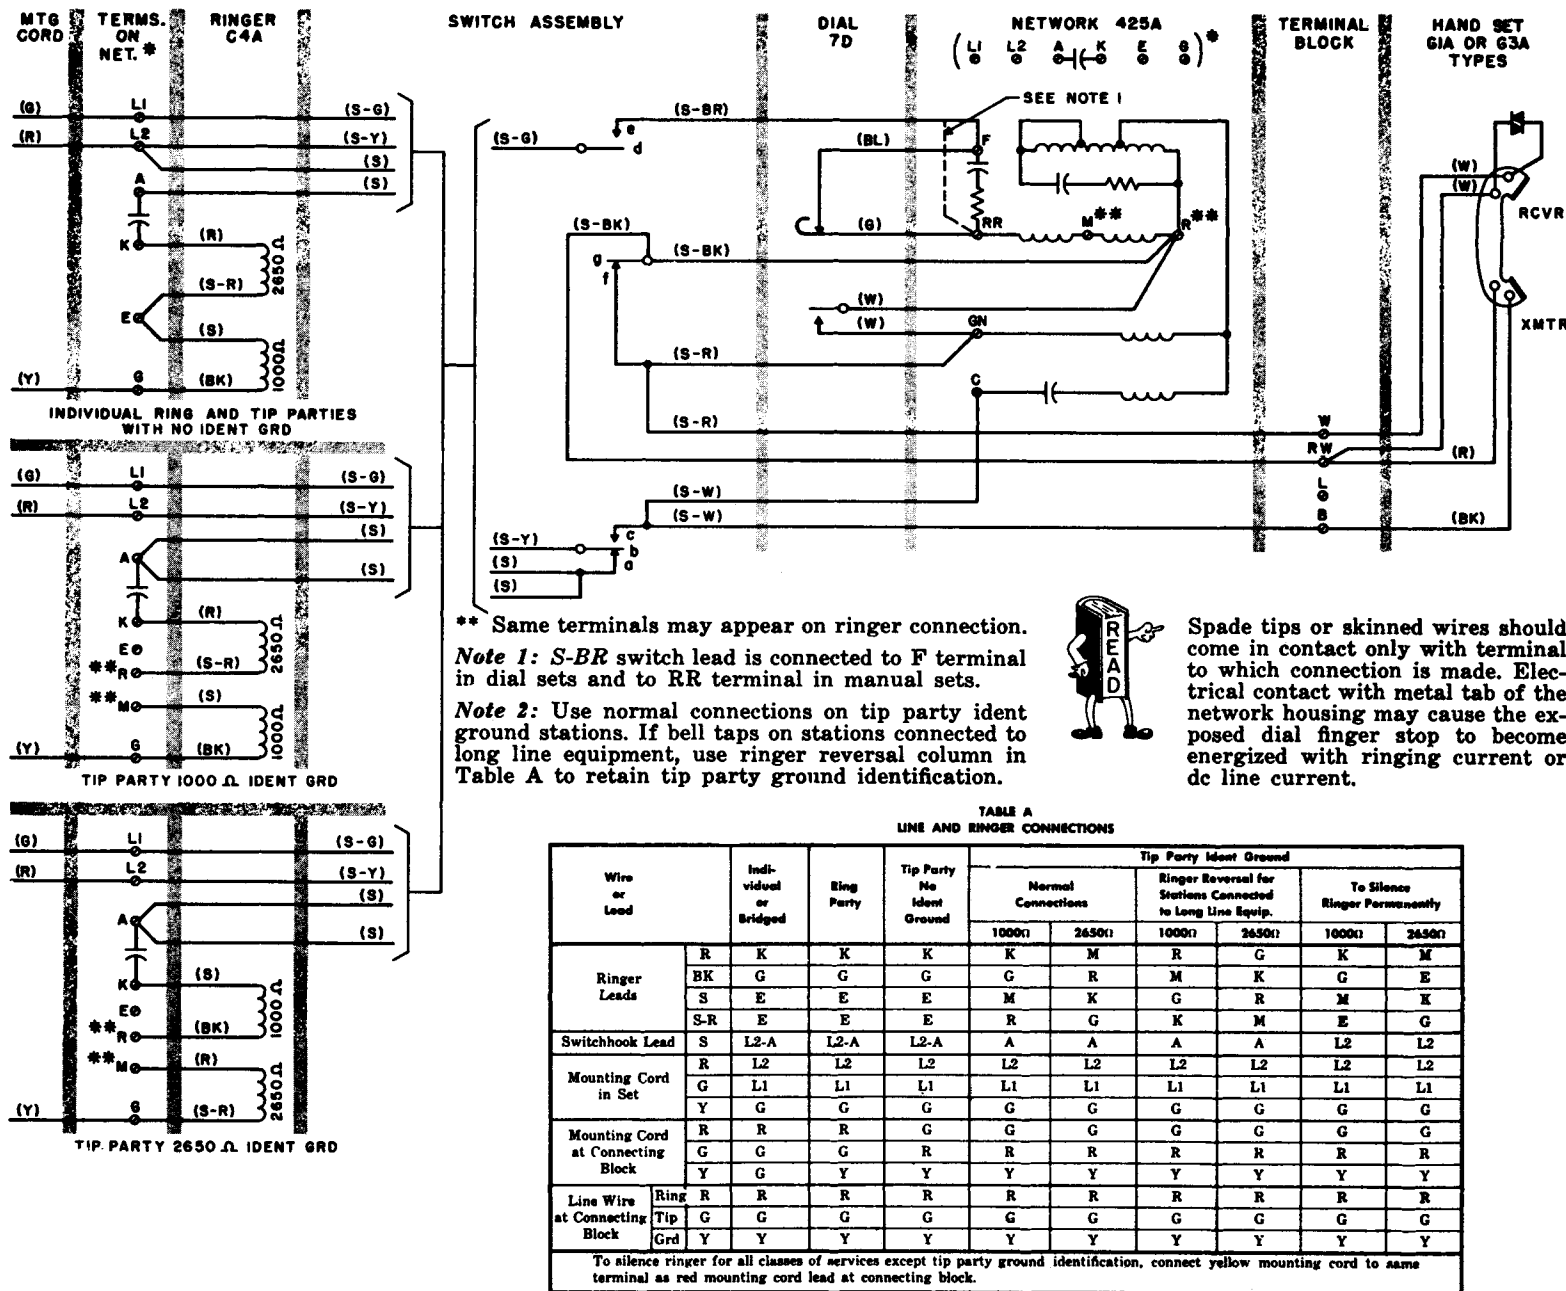


Fig. 1 — 500J, K Telephone Set, Connections

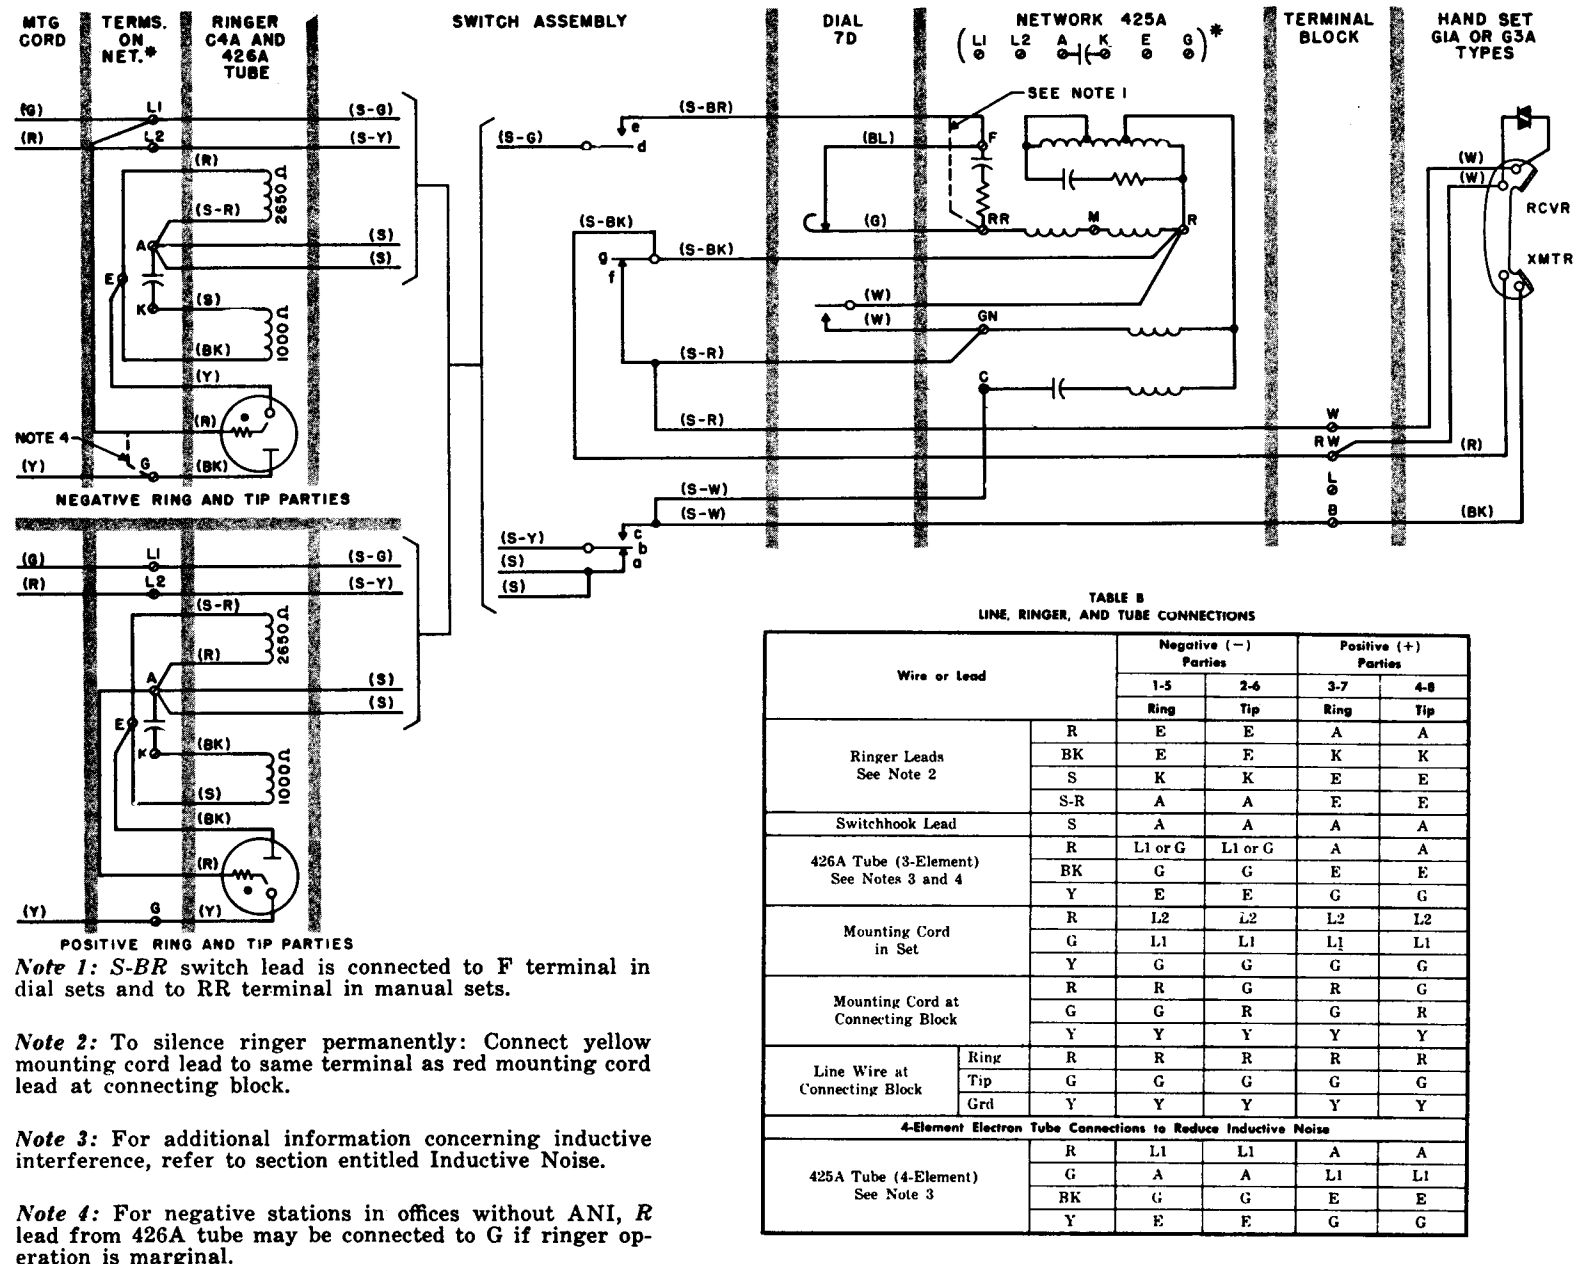

Note 1: S-BR switch lead is connected to F terminal in dial sets and to RR terminal in manual sets.

Note 2: To silence ringer permanently: Connect yellow mounting cord lead to same terminal as red mounting cord lead at connecting block.

Note 3: For additional information concerning inductive interference, refer to section entitled Inductive Noise.

Note 4: For negative stations in offices without ANI, R lead from 426A tube may be connected to G if ringer operation is marginal.

Fig. 2 — 501J, K Telephone Set, Connections