

SERVICE

2558D AND 2558DM TELEPHONE SETS

1. GENERAL

1.01 Reissued to:

- Add D16J mounting cord, Fig. 2
- Show 2558D telephone set MD, Fig. 1.

TABLE A
POLARITY GUARD CONNECTIONS (D-180190
OR D-180547 GUARD ASSEMBLY) (Notes
1, 2, and 3)

LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	POLARITY GUARD
Line Switch	W	C		S
Dial	BK	RR		T
Polarity Guard	W G		C RR	

Notes 1: For use when specified by local instructions
for end-to-end signaling installations.

- 2: Telephone sets with baseplates having rectangular punched holes in the side flanges use the D-180547 or D-180190 guard assembly.
- 3: Telephone sets whose baseplates have open-topped cutouts in the side flanges require use of the D-180547 guard assembly.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

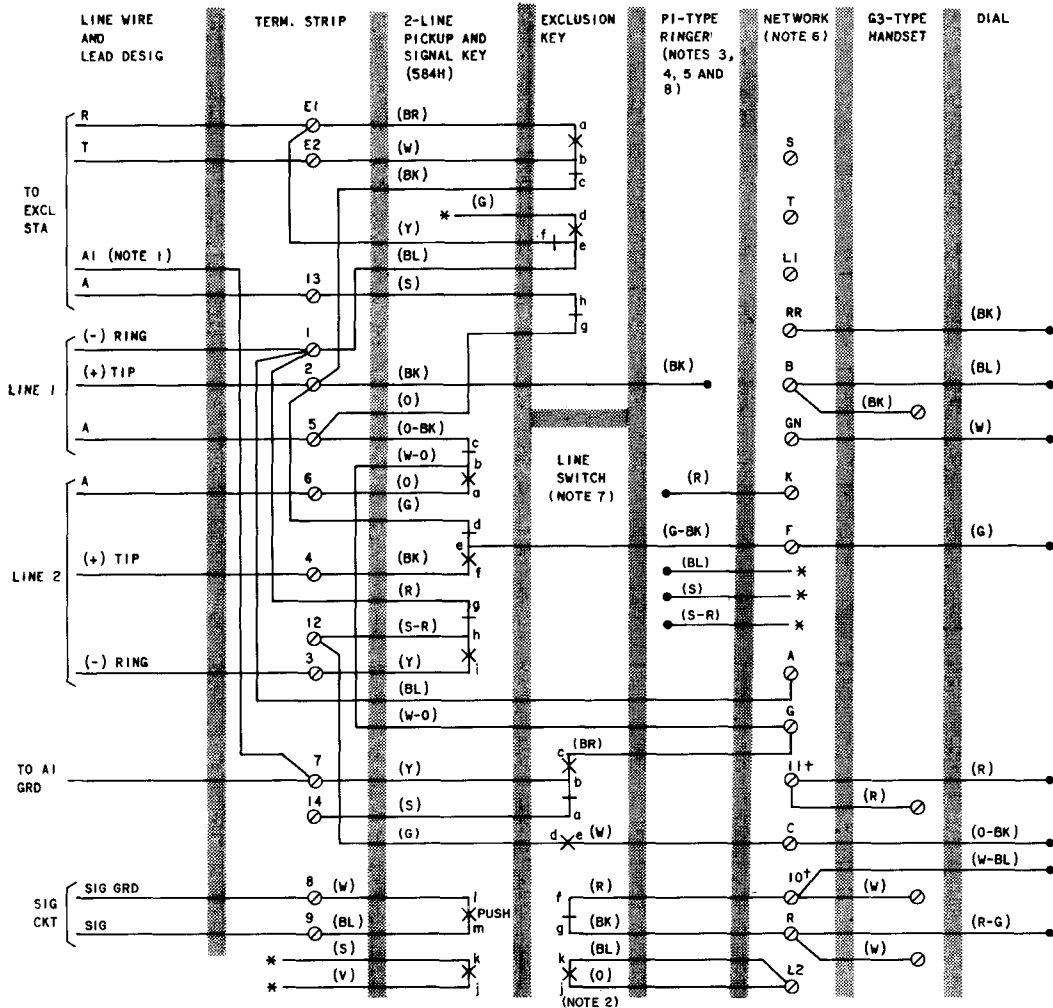


Fig. 1—2558D (MD) Telephone Set, Connections (Factory Wired)

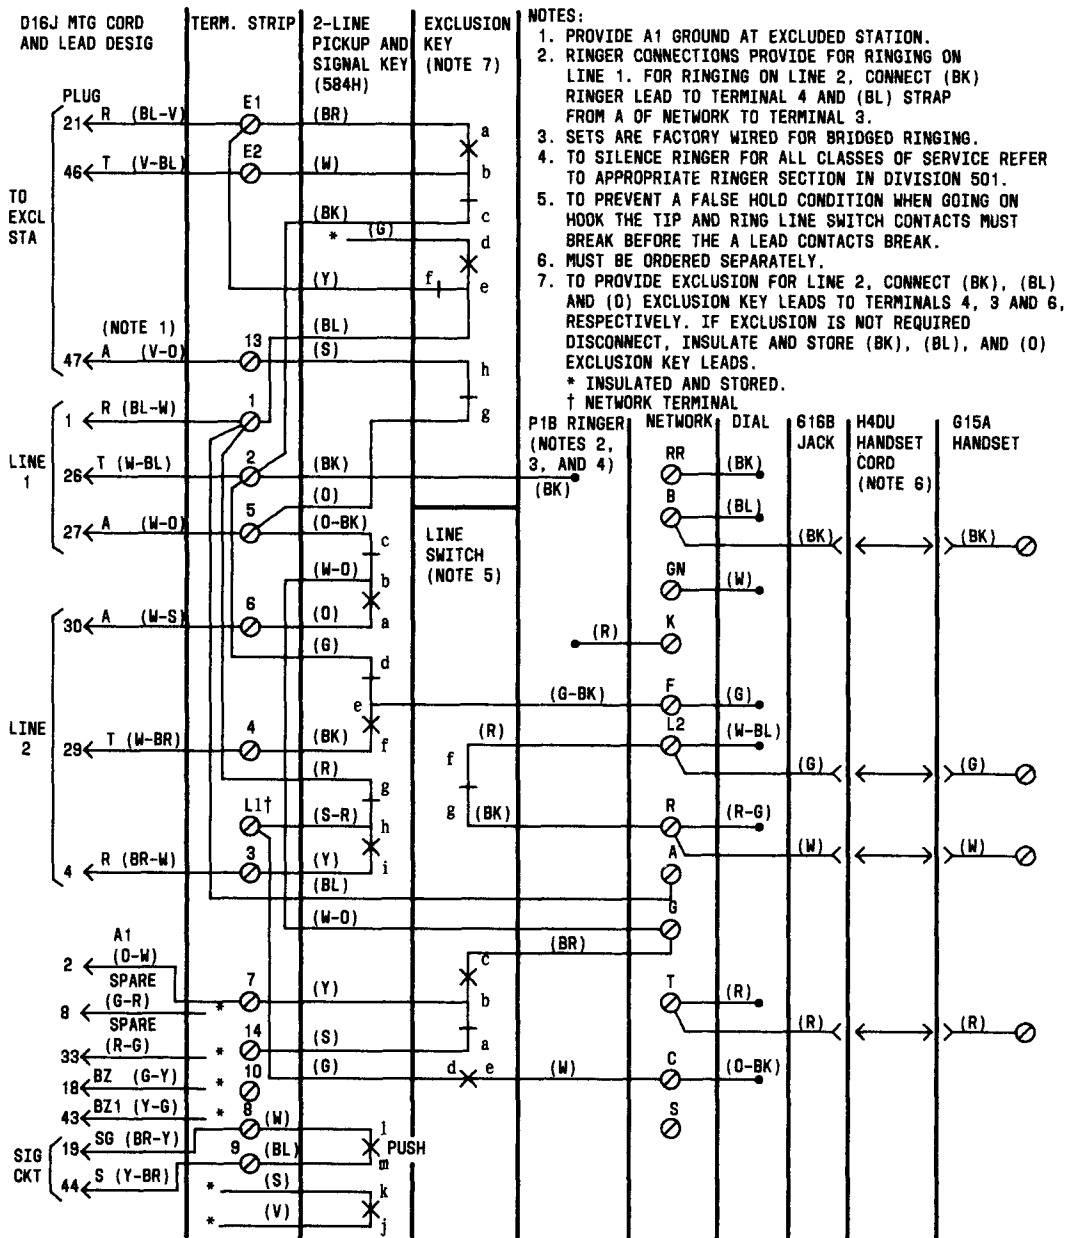


Fig. 2—2558DM Telephone Set, Connections (Factory Wired)