

SERVICE

753A AND B TELEPHONE SETS


1. GENERAL

*telephone set is not subjected to
temperatures below 40 degrees F.*

- 1.01 Reissued to add nontechnical changes to
Fig. 1.



*The 3A cord reels shall be used when
the telephone set is subjected to
temperatures below 40 degrees F. The
3B cord reel shall be used when the*

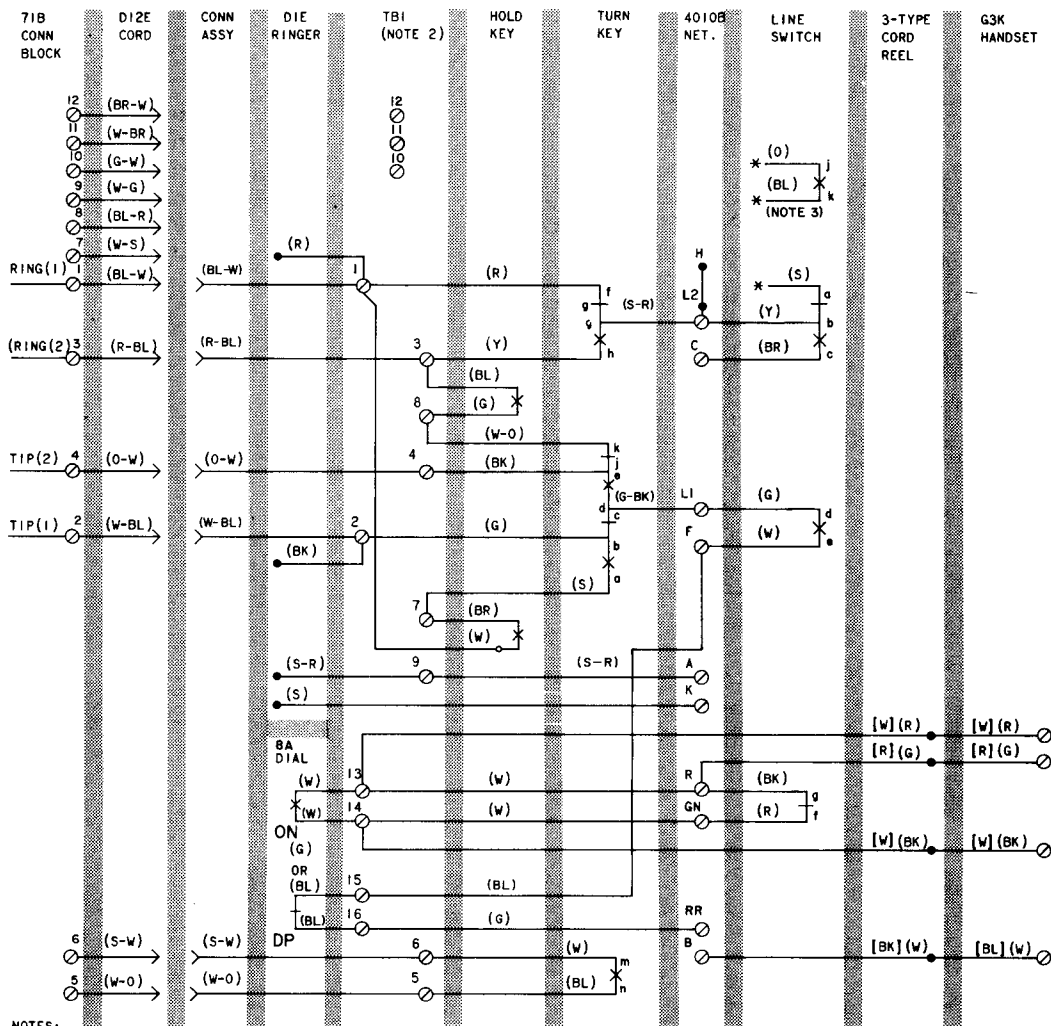

NOTES:

1. CONNECTIONS PROVIDE FOR RINGING ON LINE 1. FOR RINGING ON LINE 2, MOVE (R) AND (BK) RINGER LEADS TO TERMINALS 3 AND 4, RESPECTIVELY.
 2. TERMINALS 3 THRU 12 OF TBI WERE LOCATED ON TB2 IN EARLY MODEL SETS.
 3. CONTACTS j-k AND ASSOCIATED (O) AND (BL) LEADS HAVE BEEN OMITTED IN CURRENT MODEL SETS.
- [] 3A CORD REEL LEAD COLORS.
 () 3B CORD REEL LEAD COLORS.
 * INSULATED AND STORED.
 DP - DIAL PULSE
 ON - OFF NORMAL

LINE SWITCH SEQUENCE:

- bc - MAKE
 de - MAKE
 ab - BREAK
 fg - BREAK
 jk - MAKE

Fig. 1—753A and B Telephone Set, Connections