

ATTACHING AND FASTENING GROUND WIRE

1. GENERAL

1.01 Space ground wire fasteners as follows:

- Space 24 inches apart on ordinary ground wire runs.
- Space 16 inches apart when wire is subject to displacement.
- Place on every beam when spanning beams.
- Place within 3 inches of wall when run parallel to wall on beams.

1.02 Fasteners for ground wire and their use are shown in Fig. 1.

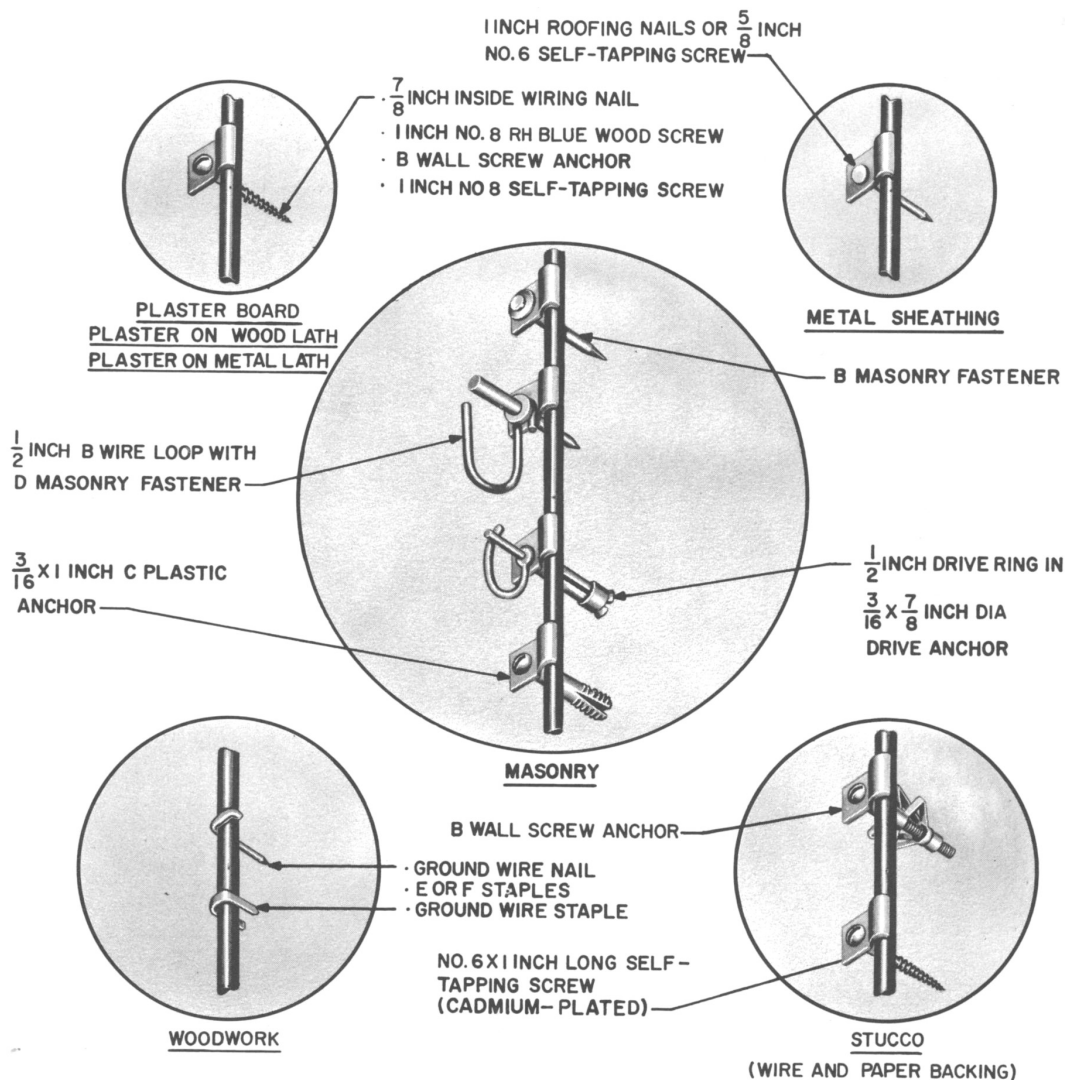


Fig. 1 — Fasteners for Ground Wire