


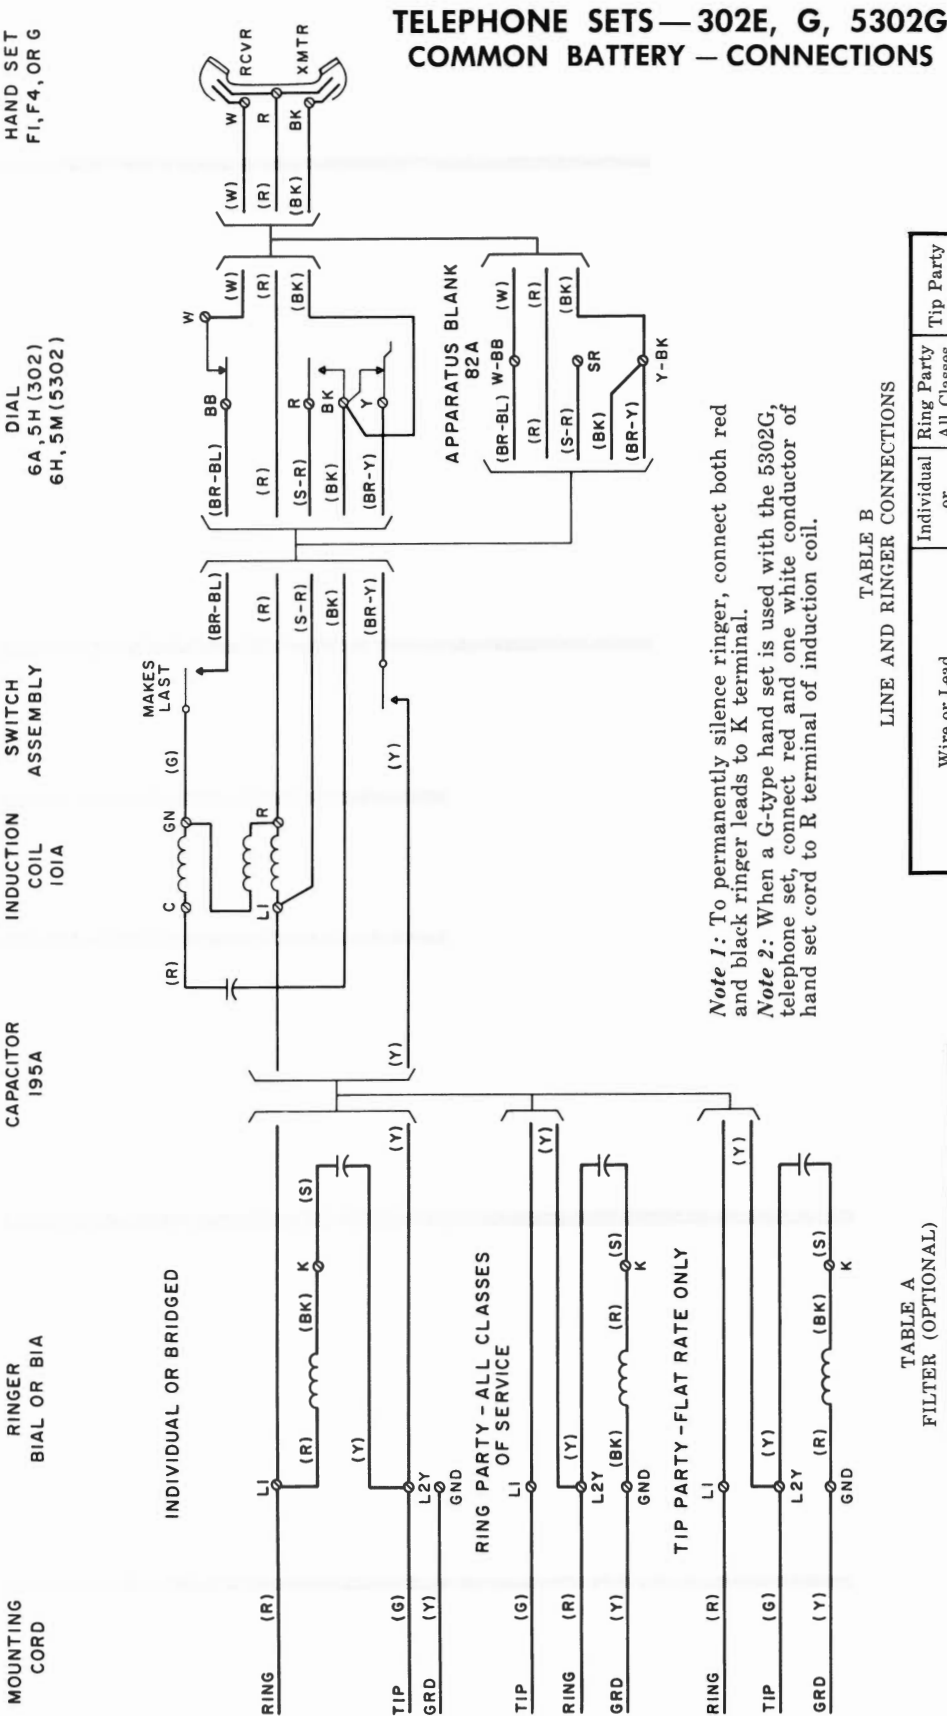

Note 1: To permanently silence ringer, connect both red and black ringer leads to K terminal.

Note 2: When a G-type hand set is used with the 5302G, telephone set, connect red and one white conductor of hand set cord to R terminal of induction coil.

TABLE B
LINE AND RINGER CONNECTIONS

Wire or Lead	Individual or Bridged	Ring Party All Classes of Service	Tip Party Flat Rate
Mounting Cord in Set	R L1 G L2Y Y Gnd	L2Y L1 Gnd Gnd	L1 L2Y Gnd
Ringer Leads	R L1 BK K	K Gnd	K
Mounting Cord at Connecting Block	R R G G Y Y	R R G G Y Y	R R G G Y Y
Line Wire at Connecting Block	Ring R Tip G Grd Y	R R G G Y Y	R R G G Y Y

TABLE A
FILTER (OPTIONAL)

Type Filter	Filter Leads	Filter Lead Termination
302G	BK	BK of Dial
61P or 61L	Y	Y of Dial
61S	R	Filter bracket terminal. Also, disconnect BR-Y lead from Y of dial and reconnect to filter bracket terminal.

Fig. 1 — 302 E, G, 5302 G Telephone Sets