


SUBSCRIBER SETS-685C

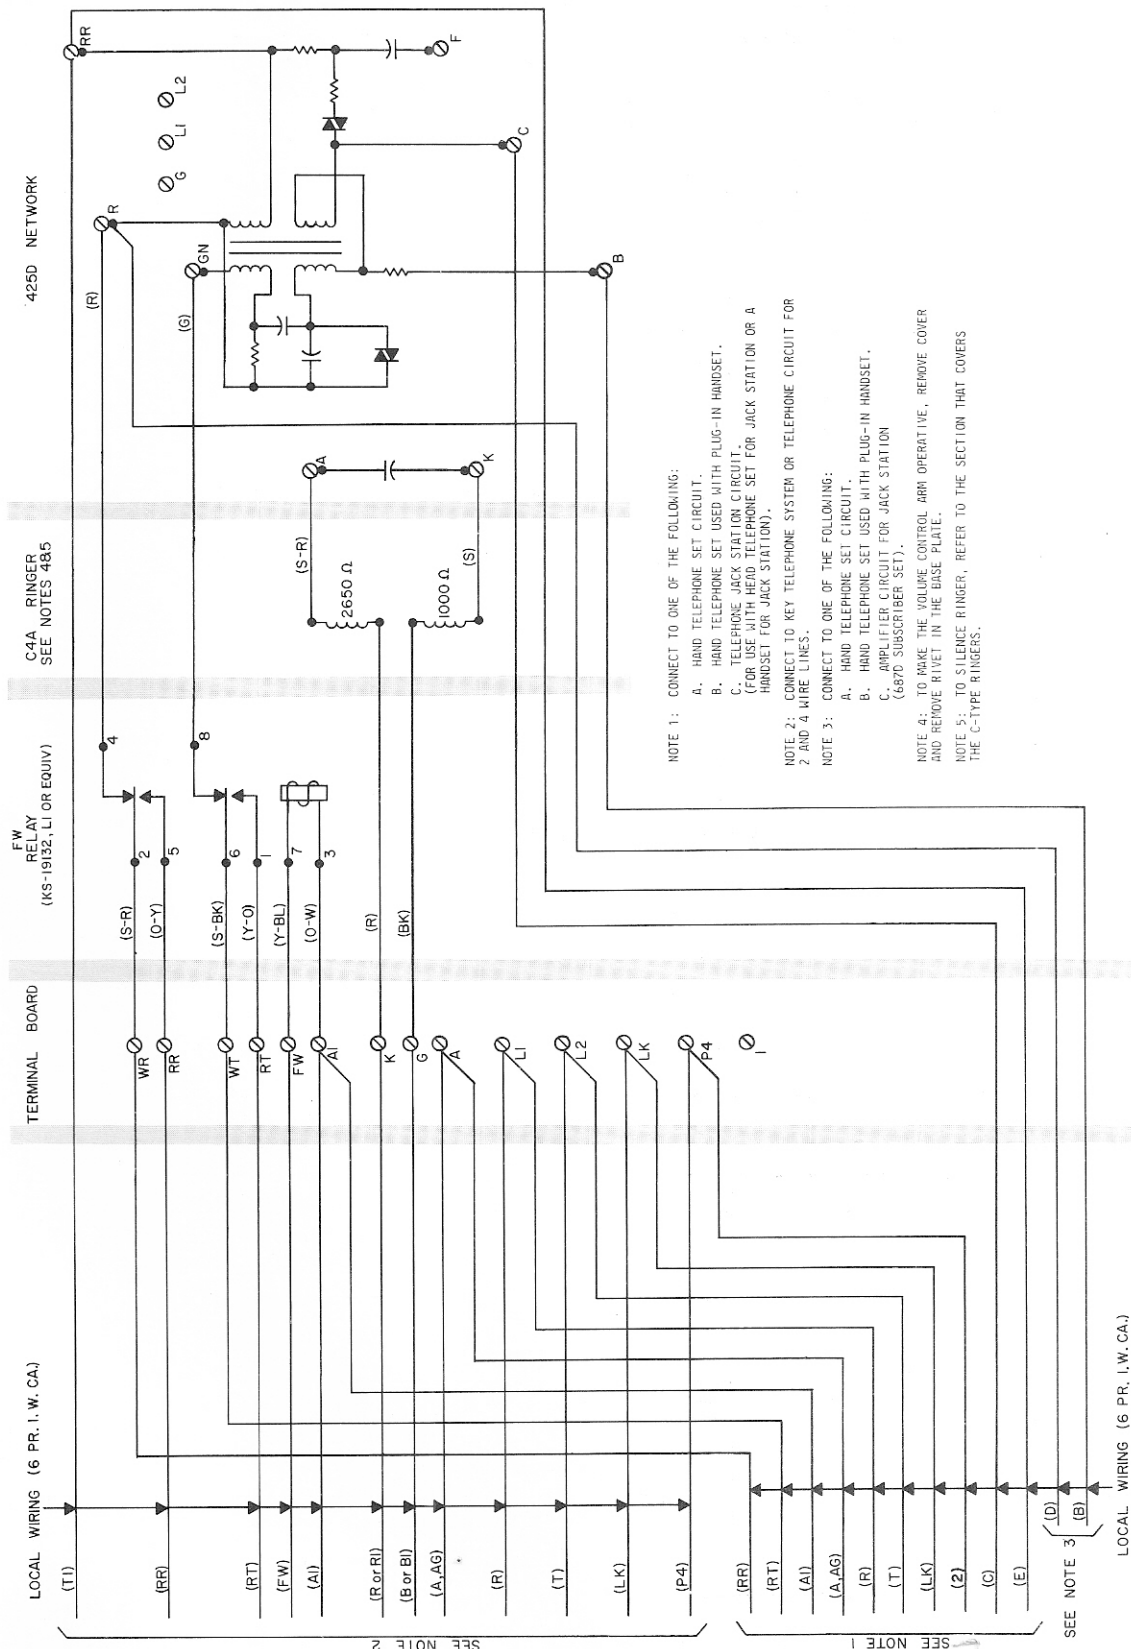

NOTE 1: CONNECT TO ONE OF THE FOLLOWING:
A. HAND TELEPHONE SET CIRCUIT.
B. HAND TELEPHONE SET USED WITH PLUG-IN HANDSET.
C. TELEPHONE JACK STATION CIRCUIT.
(FOR USE WITH HEAD TELEPHONE SET FOR JACK STATION OR A HANDSET FOR JACK STATION).

NOTE 2: CONNECT TO KEY TELEPHONE SYSTEM OR TELEPHONE CIRCUIT FOR 2 AND 4 WIRE LINES.

NOTE 3: CONNECT TO ONE OF THE FOLLOWING:
A. HAND TELEPHONE SET CIRCUIT.
B. HAND TELEPHONE SET USED WITH PLUG-IN HANDSET.
C. AMPLIFIER CIRCUIT FOR JACK STATION (6870 SUBSCRIBER SET).

NOTE 4: TO MAKE THE VOLUME CONTROL ARM OPERATIVE, REMOVE COVER AND REMOVE RIVET IN THE BASE PLATE.

NOTE 5: TO SILENCE RINGER, REFER TO THE SECTION THAT COVERS THE C-TYPE RINGERS.

Fig. 1 - Connections for Key Telephone System or Telephone Circuit for 2- and 4- Wire Lines Using Separately Mounted Keys