

**SERVICE****215A, B, C, AND D HAND TELEPHONE SETS****1. GENERAL**

**1.01** This section contains connection information for 215-type hand telephone sets formerly found in Sections 502-315-400 and 502-315-401 which are hereby canceled.

**1.02** The 215A and C are the same as the 215B with the exception of the type of dial number plate furnished. The 215B has the standard dial number plate with black letters and red numerals.

**TABLE A**  
**LINE AND RINGER CONNECTIONS**  
**685A OR 686A SUBSET USED WITH**  
**215A, B, C, or D HAND TELEPHONE SET**

| WIRE<br>OR<br>LEAD                                   | COLOR | RING<br>PARTY | TIP<br>PARTY<br>(NOTE 1) | NEGATIVE              | POSITIVE |
|--|-------|---------------|--------------------------|-----------------------|----------|
|  |       |               |                          | RING STATION (NOTE 1) |          |
|  |       |               |                          | 1 AND 5               | 3 AND 6  |
| Ringer<br>Leads<br>(Note 2)                          | R     | L2            | L2                       | G                     | L2       |
|  | BK    | G             | G                        | G                     | L2       |
|  | S     | K*            | K*                       | A*                    | A*       |
|  | S-R   | 1             | 1                        | K*                    | K*       |
| 426A<br>Tube<br>Leads<br>(3 elements)<br>(686A only) | BK    |               |                          | K*                    | K*       |
|  | Y     |               |                          | L2                    | G        |
|  | R     |               |                          | G                     | L2       |

\* Terminal on network.

**Notes:**

- Reverse tip and ring for tip party service.
- To silence ringer permanently, connect (R) and (BK) ringer lead to K on the terminal strip.

**NOTICE**

This document is either  
AT&T - Proprietary, or WESTERN  
ELECTRIC - Proprietary

Pursuant to Judge Greene's Order of August 5, 1983, beginning on January 1, 1984, AT&T will cease to use "Bell" and the Bell symbol, with the exceptions as set forth in that Order. Pursuant thereto, any reference to "BELL" and/or the BELL symbol in this document is hereby deleted and "expunged".

**TABLE B**  
**ASSOCIATED APPARATUS**

| CLASS OF SERVICE  | SUBSCRIBER SET |
|---|----------------|
| Individual Lines<br>2-Party Flat Rate*<br>2-Party Message Rate (Ring Party Only)*<br>4-Party Semiselective<br>Multiparty Divided Code<br>Regular PBX Stations<br>750A and 755A Keyless Stations | 685A           |
| 4-Party Full Selective<br>8-Party Semiselective   | 686A           |

\* No message rate or tip-party identification can be provided for tip-party station.

**TABLE C**  
**61N FILTER CONNECTIONS**  
**(NOTE)**

| FILTER LEADS | FILTER LEAD TERMINATIONS |
|--------------|--------------------------|
| BK           | BK of dial               |
| Y            | Y of dial                |
| R            | BK of line switch        |

Note: The 215-type sets are arranged for, but not equipped with, a 61N filter for radio-frequency suppression. When this filter is required, remove the dial cord between Y of the dial and BK of the line switch, connect filter as shown in table.

**TABLE D**  
**COMBINATION OF APPARATUS**

| HAND<br>TEL. SET<br>CODE | COMPONENTS     |                  |                         |                    |                   |
|--------------------------|----------------|------------------|-------------------------|--------------------|-------------------|
|                          | HANDSET        | HANDSET MOUNTING | DIAL OR APPARATUS BLANK | TYPE MOUNTING CORD | TYPE HANDSET CORD |
| 215A-3E                  | E1E-3          | D8-3             | 50J-3<br>94A-3          | D5                 | H-3               |
| 215A-3F                  | F1A-3<br>F1G-3 |                  |                         |                    |                   |
| 215A-3F                  | F4A-3          |                  |                         |                    |                   |
| 215C-3F                  | E1E-3          |                  | 4H or 5H                |                    |                   |
| 215C-3F                  | F1A-3<br>F1G-3 |                  | 5H or 6A                |                    |                   |
| 215C-3F                  | F4A-3          |                  | 6A                      |                    |                   |

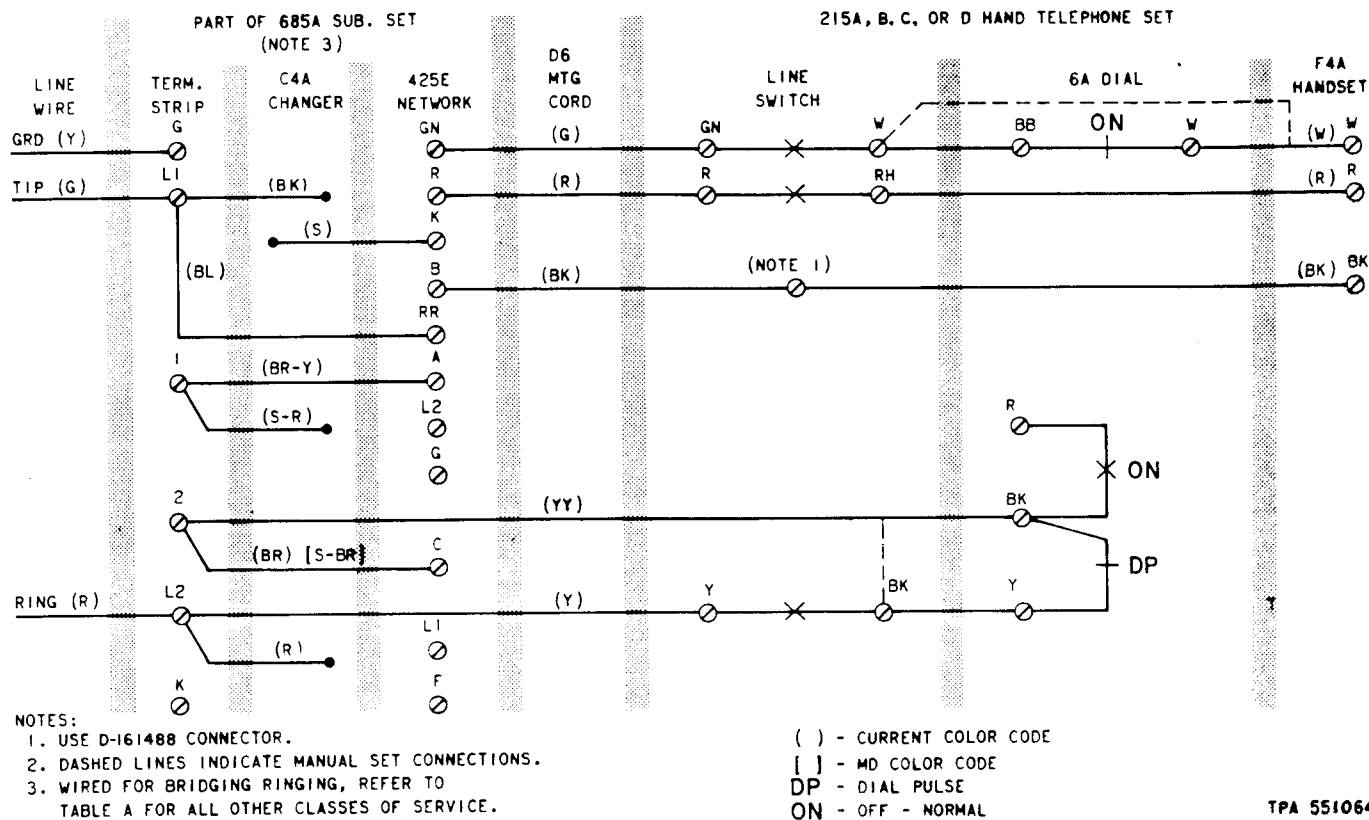


Fig. 1—215A, B, C, and D Hand Telephone Sets, Connections Used With 685A Subscriber Set