

- I. This section is reissued to add information on the D5AM cord.
- 1.01 The D5AM cord replaces the D5AF cord which is rated Manufacture Discontinued.

CIRCUIT DIAGRAM NOTES

- () Indicates current color code.
- [] Indicates MD color code.

Note 1: Dotted lines in diagram show manual set connections.

Note 2: New manufactured sets are wired as drawn. On converted 190 series sets, if the BR lead does not reach the BKX terminal, it is terminated on a BK terminal and a black strap connects BK and BKX.


Note 3: When a 61R filter is required for radio frequency suppression, move yellow dial lead from Y upper housing contact spring to filter bracket terminal and connect filter leads as follows:

- Yellow lead to filter bracket terminal.
- Black lead to BK or BKX upper housing contact.
- Red lead to Y upper housing contact.

Note 4: When coin collector is installed in a KS-14611, List 2 booth or a KS-16705 mounting, the tip and ring line terminations are connected directly to the subscriber set.


Note 5: New manufactured sets are wired as shown in 2. To rearrange for use with 685B subscriber set, disconnect yellow strap between T terminal and coin relay and wire as shown in 3. Insulate and store yellow strap for future use.

2. Circuit diagram for connection with 685A network-type subscriber set.

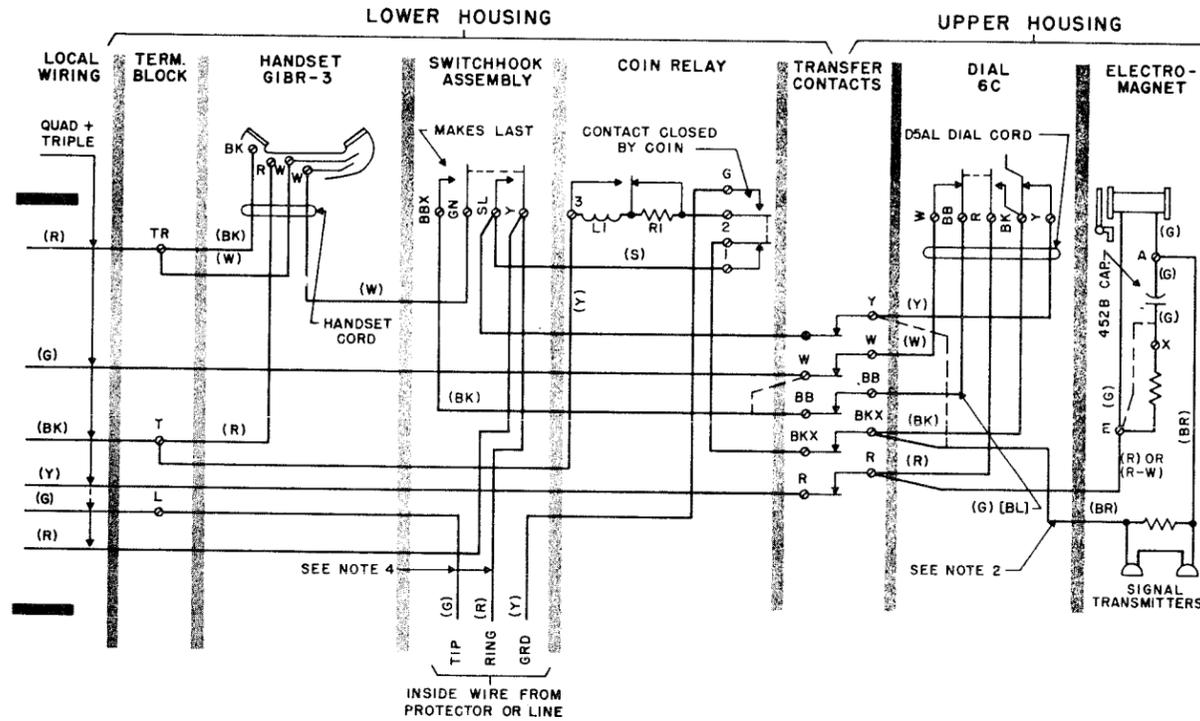

See notes 1, 2, 3, and 4 on facing page.

3. Circuit diagram for connection with 685B network-type subscriber set.

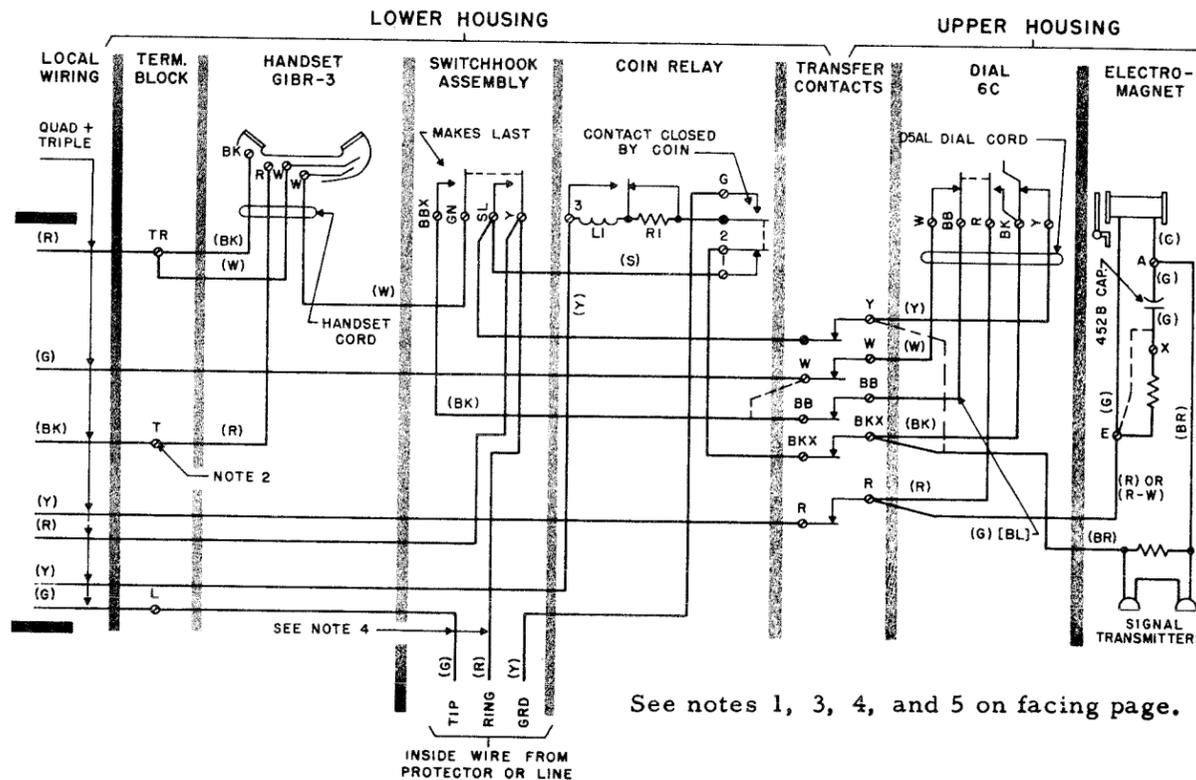

See notes 1, 3, 4, and 5 on facing page.

COIN COLLECTORS - PREPAY

234 (G)

230, 233 (C, D, G, H)

220, 223 (CT, DT, GT, HT)

191, 195, 196, 197 (CNT, DNT, GNT, HNT)

CONNECTIONS