


# SAN/BAR CORPORATION

MODEL 4100A  
TWO STATION LINE CONTROL CARD

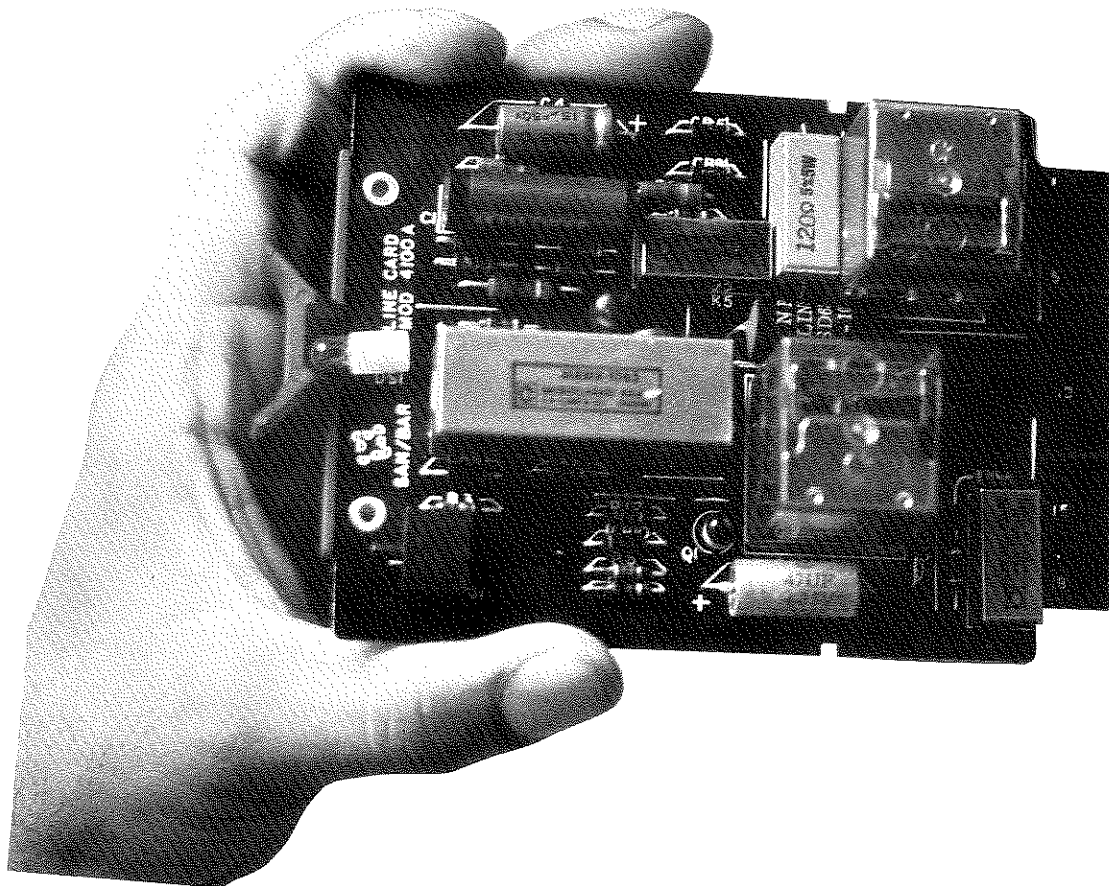


## GENERAL DESCRIPTION

The SAN/BAR Model 4100A will enable two separate key telephone systems to have duplicate supervision on the same C.O. or PBX line. In all other respects, it is identical in operation to, and will mount in place of, any KTU line card.

The SB 4100A Line Control Card requires one cable pair between KTU equipments for two station control. One card is required for each location. The "A" and "AR" lines (pins 16 and 18) are the connecting points for the two 4100A's. Range limitation is 2500 Ohms.

The added "AE" line (pin 16) is commoned with the regular "A" lead of normal KTU usage. The "AER" line (pin 18) must be surface wired from the connector to a spare pin on the terminal strip. Existing wire on pin 18, in most cases, will be -24 VDC. This is to be removed by the installer and sleeved.

The resultant hook-up configuration between the local and companion SB 4100A's will connect the "AE" and "AER" terminations.

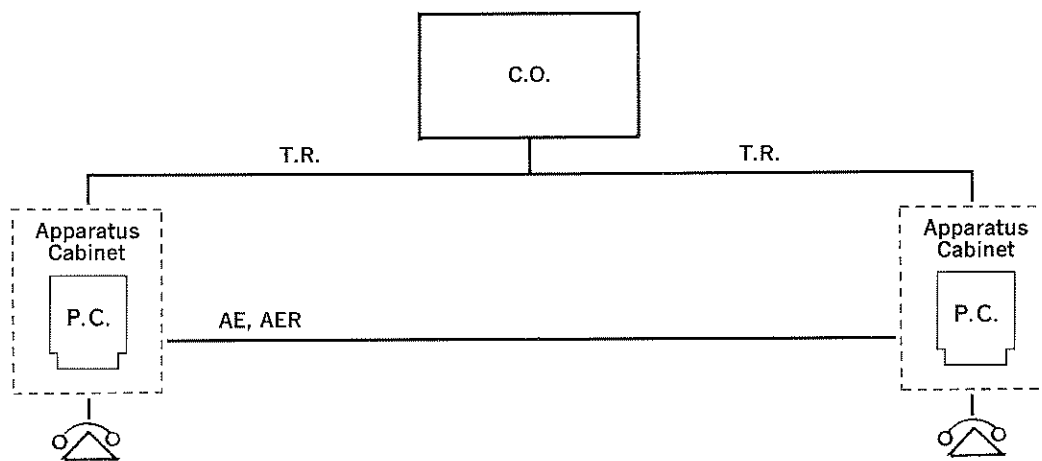

**ORDER FROM YOUR NEAREST SAN/BAR SERVICE CENTER**

**WESTERN**  
San/Bar Corporation  
17422 Pullman Street  
Santa Ana, California 92711  
(714) 546-6500

**CENTRAL**  
San/Bar Corporation of Texas  
2525 National Drive  
Garland, Texas 75040  
(214) 271-1526

**EASTERN**  
San/Bar Corporation of the Carolinas  
1600 Cooper Street  
Durham, North Carolina 27701  
(919) 596-2127

**SAN/BAR CORPORATION**

