




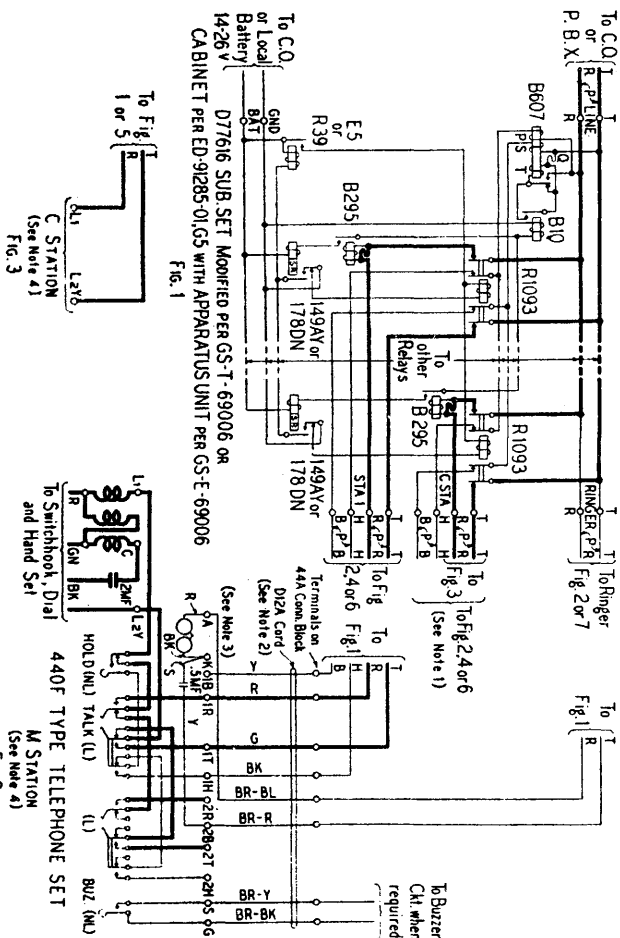

PLAN 103


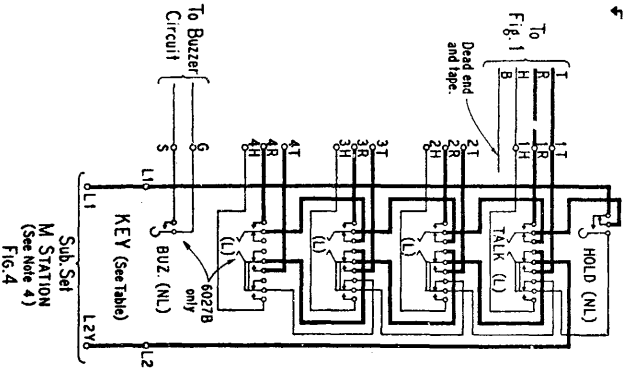


TYPE OF KEY	
Buzzer not used	Buzzer used
6027B (FIG. 4)	6027B (FIG. 4)
or 6011A (FIG. 6)	or 6011A (FIG. 6)
6011A (FIG. 6)	and Buzzer Key

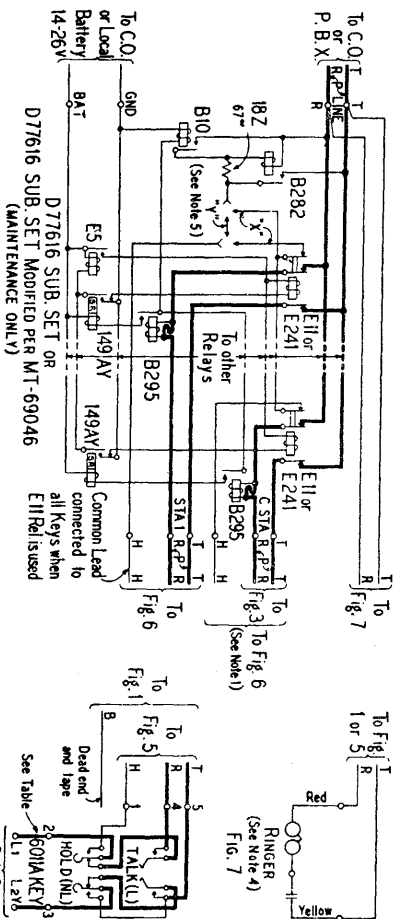

Notes:

1. If Plan consists of 5 Master Stations, the fifth Station shall be connected to these Terminals.
2. Terminate un-used Cord Conductors on spare Conn. Block Terminals where available otherwise tape them.
3. Transfer red Ringer and yellow Condenser Leads from Terminals 1R and 1T to Terminals A and 2B.
4. Ringers may be located as required and wired per Fig. 2 or 7.
5. "X" Wiring used with E241 Relays, "Y" Wiring used with E11 Relays.



PLAN 103