


**COIN COLLECTORS — PREPAY  
191, 195, 196, 197 TYPE  
COMMON BATTERY — CONNECTIONS**

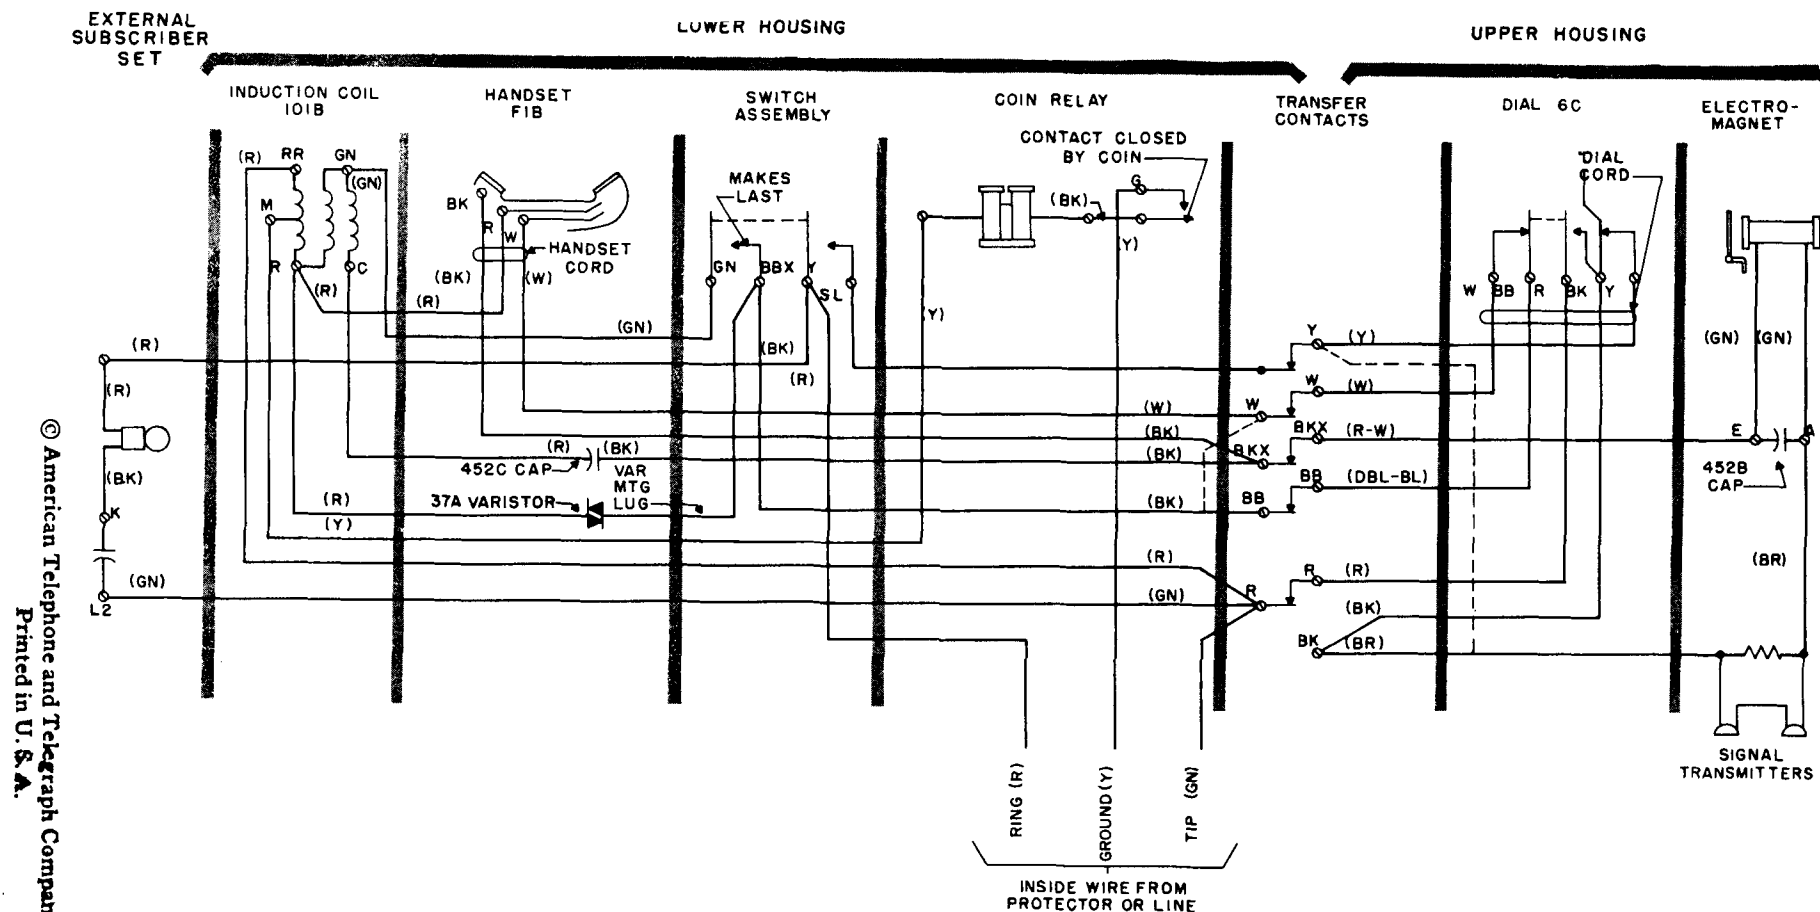

**Note 1:** Dotted lines in diagram show manual set connections.

**Note 2:** When a 61R filter is required for radio frequency suppression, move yellow dial lead from Y upper housing contact spring to filter bracket terminal and connect filter leads as follows:

- Yellow lead to filter bracket terminal
- Black lead to BK upper housing contact
- Red lead to Y upper housing contact.

**Fig. 1 — Circuit Diagram of 191, 195, 196, 197 (C, D, G, and H) Coin Collectors for Connection to 531A; 534DE, DF; 584DE, DF; and 687A Subscriber Sets, Ringers Only.**