


1003 MONO. & 32 SET 3 WINDING INDUCTION COIL 5 POINT SWITCHHOOK

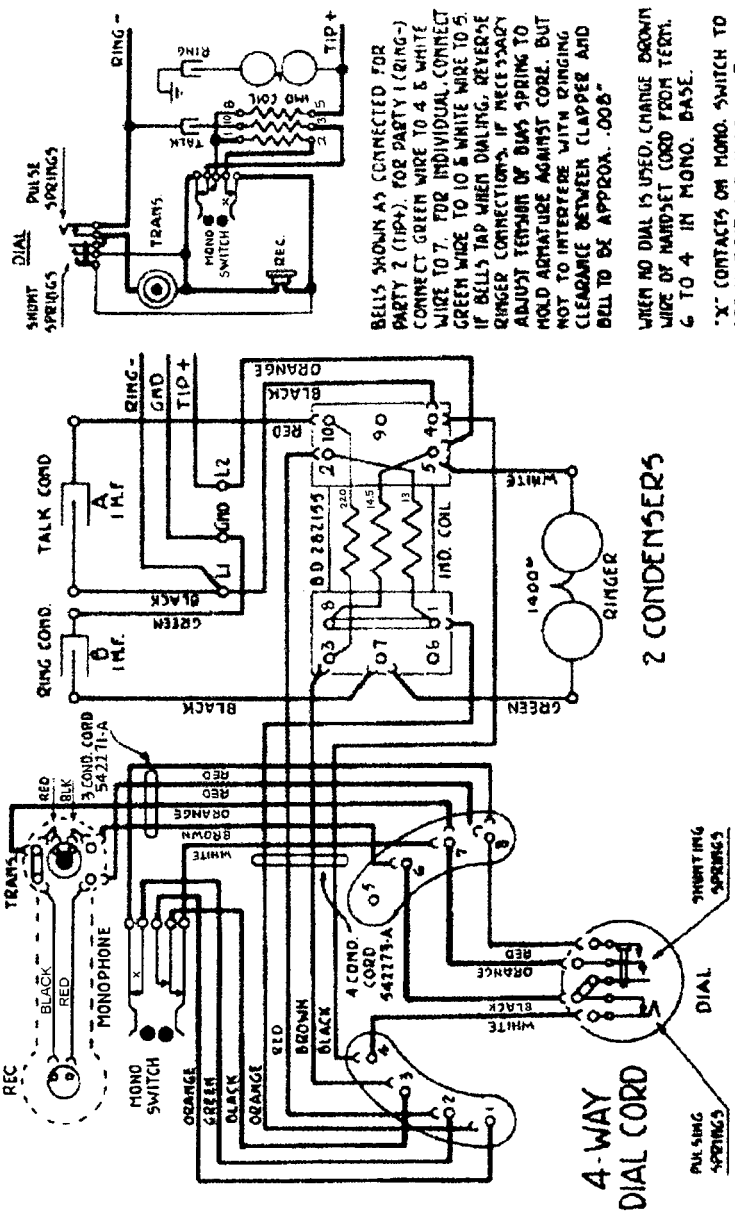

BELLS SHOWN AS CONNECTED FOR PARTY 2 (TIP+). FOR PARTY 1 (RING-) CONNECT GREEN WIRE TO 4 & WHITE WIRE TO 7. FOR INDIVIDUAL, CONNECT GREEN WIRE TO 10 & WHITE WIRE TO 5. IF BELLS TAP WHEN DIALING, REVERSE RINGER CONNECTIONS. IF NECESSARY ADJUST TERMINI OF BIAS SPRING TO HOLD ARMATURE AGAINST CORE. BUT NOT TO INTERFERE WITH RINGING CLEARANCE BETWEEN CLAPPER AND BELL TO BE APPROX. .008".

WHEN NO DIAL IS USED, CHANGE BROWN WIRE OF HANDSET CORD FROM TERM. 6 TO 4 IN MONO. BASE.

X CONTACTS ON MONO. SWITCH TO BREAK FIRST AND MAKE LAST.

2 CONDENSERS