





K. S. & S. CO. CHICAGO

TRIAD CIRCUIT DIVIDED RINGING AUTO. COMM. BATTERY WALL TELEPHONE.

21238-A

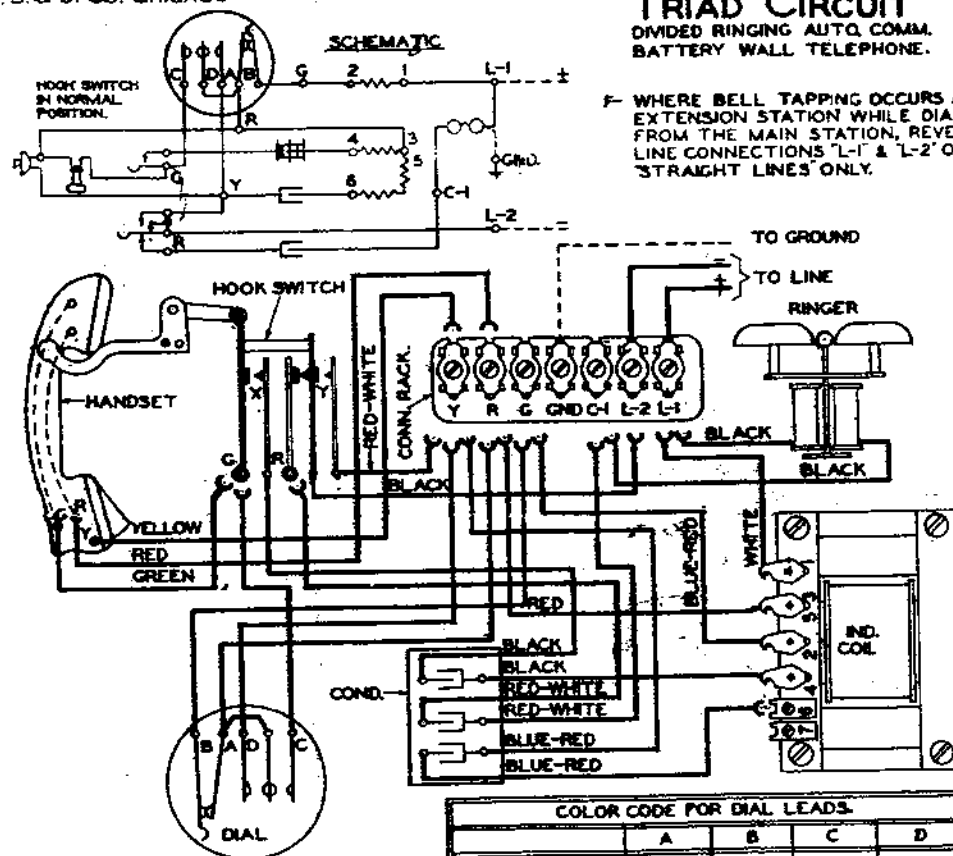

COLOR CODE FOR DIAL LEADS.				
	A	B	C	D
K. S. & S. CO.	SLATE	WHITE	GR. WH.	GREEN
AUTO. ELEC. CO.	GR. WH.	GREEN	GR. RED	GR. BLK.

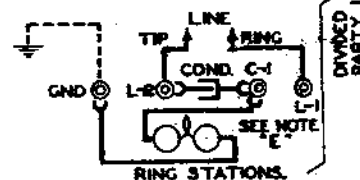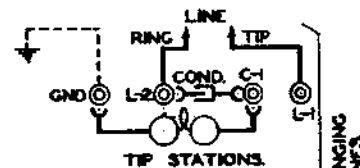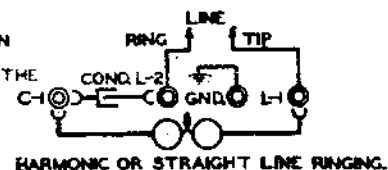

- A-CONNECT 'BLUE-RED' WIRE TO BIND. POST 'R' INSTEAD OF 'G' WHEN DIAL IS NOT USED.
- B-CONTACTS 'X' TO BREAK BEFORE 'Y' WHEN HANDSET IS HUNG ON HOOK.
- C- FOR ADDITIONAL SIDE TONE REDUCTION CHANGE CONNECTION FROM TERM. 'B' TO '7' ON IND. COIL.
- D- USE 1/2 M.F. CONDENSER IN SERIES WITH HARMONIC RINGERS IN FREQ. OF 42, 54, 60, 66 & 84 2/3". FOR ALL OTHER RINGERS USE 1 M.F. CONDENSER.
- E- REVERSE RINGER LEADS AS SHOWN ON BIASED RINGERS ONLY.

21238-A

9917 WALL PHONE

COIL 1-2=180 3-4=24 5-6=150 ohms 106A

2-5-41
REV. 40
M.V.-J