



CORD CKT.

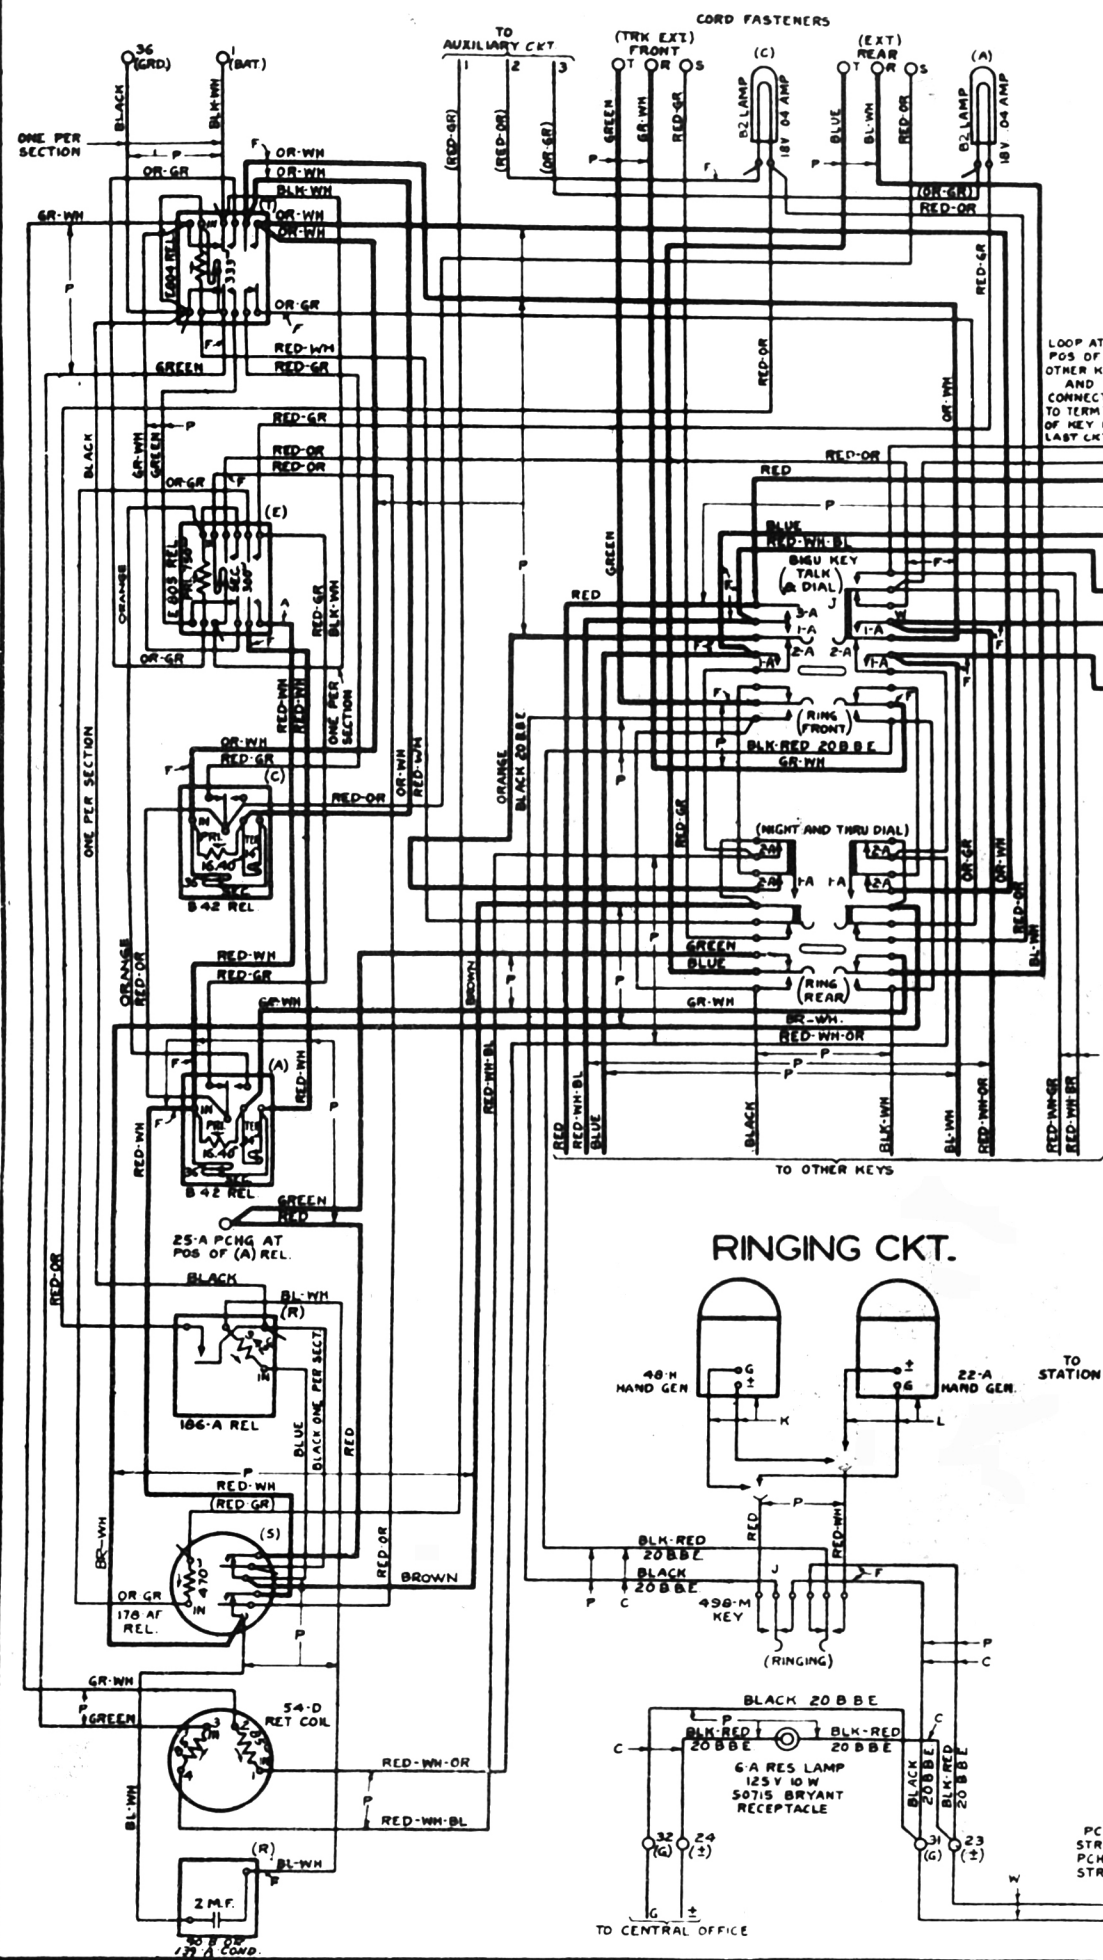


TEL. CKT.

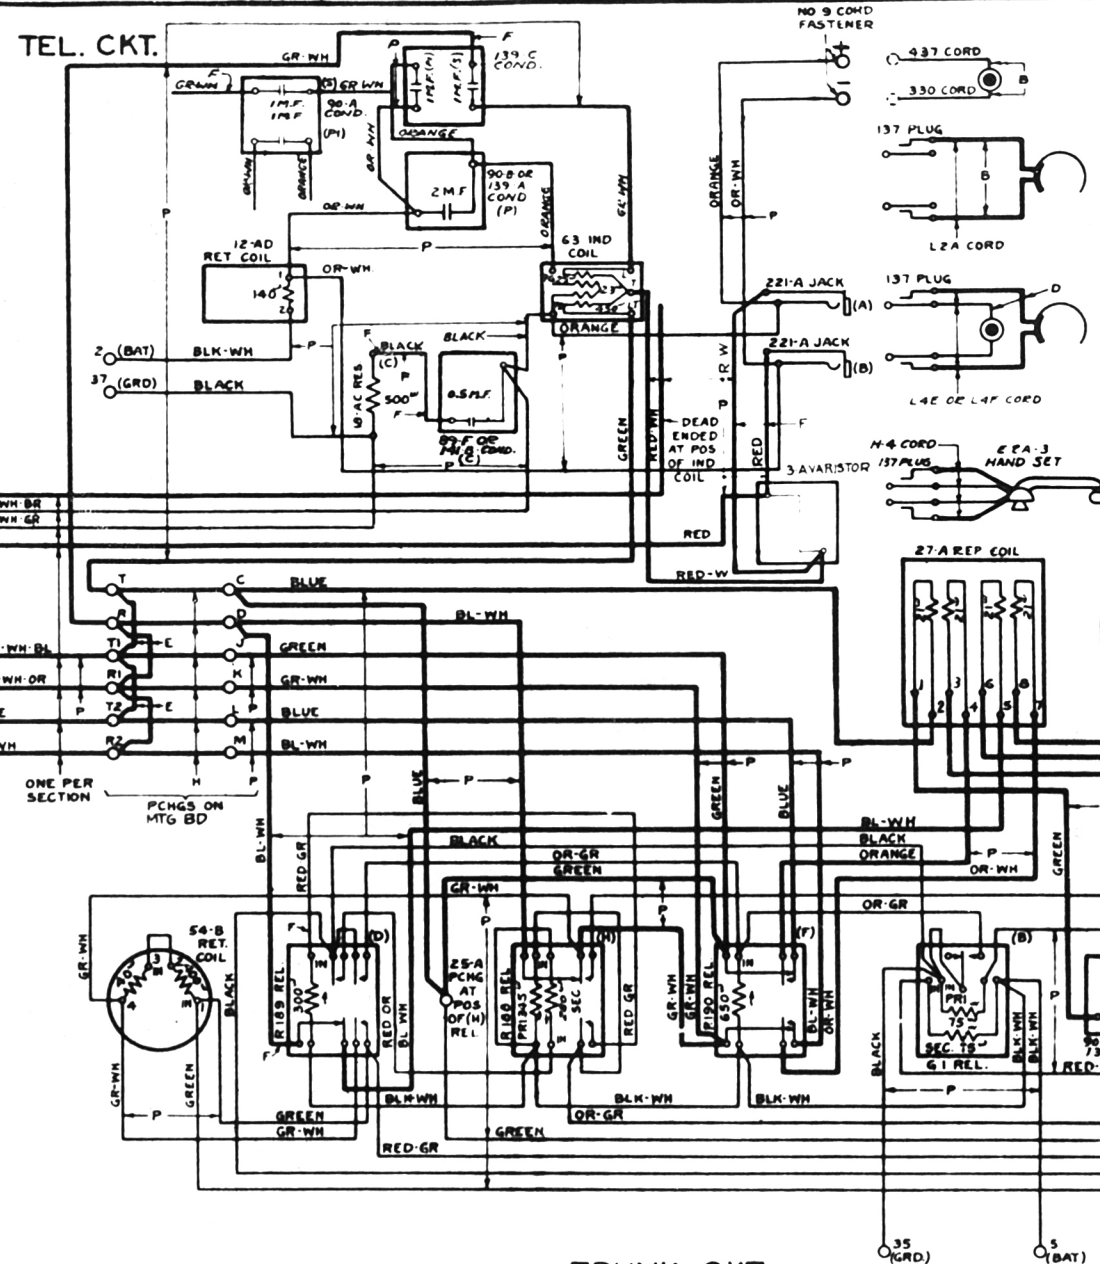


NOTES

- 1 NUMBERED PUNCHINGS ARE PUNCHINGS ON POWER TERM STRIP
- 2 WIRES NOT OTHERWISE SPECIFIED ARE 22 O.C.
- 3 0 OR 00 ON LEFT SIDE OF SHEVYSHLET OPEN
- 4 KEY CONTACTS 1 A 2 A AND 3 A SHALL MAKE OR BREAK IN NUMERICAL ORDER INDICATED
- 5 "7" DENOTES LEADS BROUGHT FROM CABLE IN SEPARATE STITCH
- 6 "A" WIRE DISCONNECTED WHEN USED IN CONNECTION WITH MANUAL OFFICE EQUIPPED WITH 1000-1000 LINE RELAYS.
- 7 "B" APPARATUS USED WHEN TRANSMITTER IS EQUIPPED.
- 8 "C" APPARATUS DENOTES LEADS IN SEPARATE CABLE SEWED TO OUTSIDE OF REGULAR CABLE.
- 9 "D" APPARATUS USED WHEN CHEST TRANSMITTER IS EQUIPPED.
- 10 "E" WIRING USED AND "G" LEADS LEFT DEAD AT POSITION OF DIAL MOUNTING WHEN DIAL CIRCUIT IS NOT REQUIRED
- 11 "H" WIRING USED WHEN DIAL CIRCUIT IS REQUIRED.
- 12 "I" WIRING USED WHEN A-B HAND GEN IS FURNISHED.
- 13 "L" WIRING USED WHEN 22-A HAND GEN IS FURNISHED.
- 14 "N" WIRING USED WHEN ULTIMATE CAPACITY EXCEEDS 80 STATIONS
- 15 "N" WIRING USED WHEN ULTIMATE CAPACITY DOES NOT EXCEED 80.
- 16 "O" WIRING USED WHEN (L) RELAY IS NOT FURNISHED.
- 17 "R" WIRING USED ON 53-A SWBD.
- 18 "S" WIRING USED ON 53-B SWBD.
- 19 "U" WIRING USED ON 53-B SWBD. WHEN (L) REL IS WIRED ONLY.
- 20 "V" WIRING USED WHEN A C BUZZER IS EQUIPPED.
- 21 "X" WIRING USED WHEN D C BUZZER IS EQUIPPED.
- 22 MODIFICATION OF P407026 CONSISTS OF REPLACING E 4 RELAY IN TRUNK CWT WITH A J-48 RELAY AND ADDING 3 A VARISTOR TO L. CWT.
- 23 J-48 RELAY RATED MFR D16C. DATING 11-1-58 SPECIFY E-4 REL AND "V" WIRING
- 24 IMF COND UNLESS SPECIFIED OTHERWISE. SPECIFY 13 M.F. FOR INCREASED SIG RANGE.


DIAL CKT.

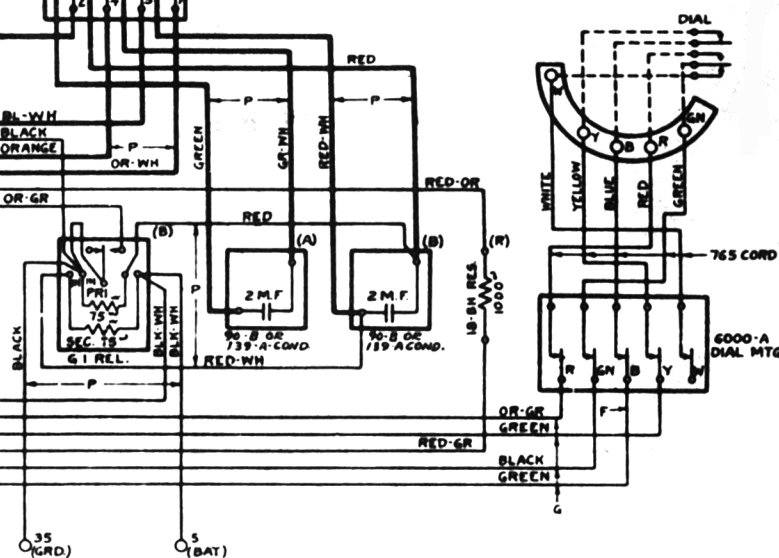


RINGING CKT.

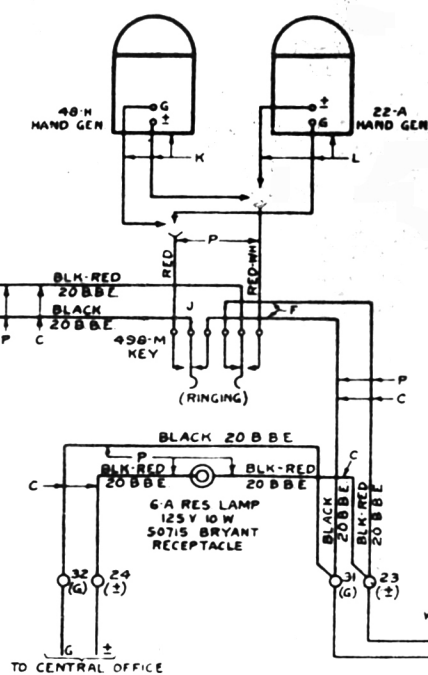

STATION LINE CKT.

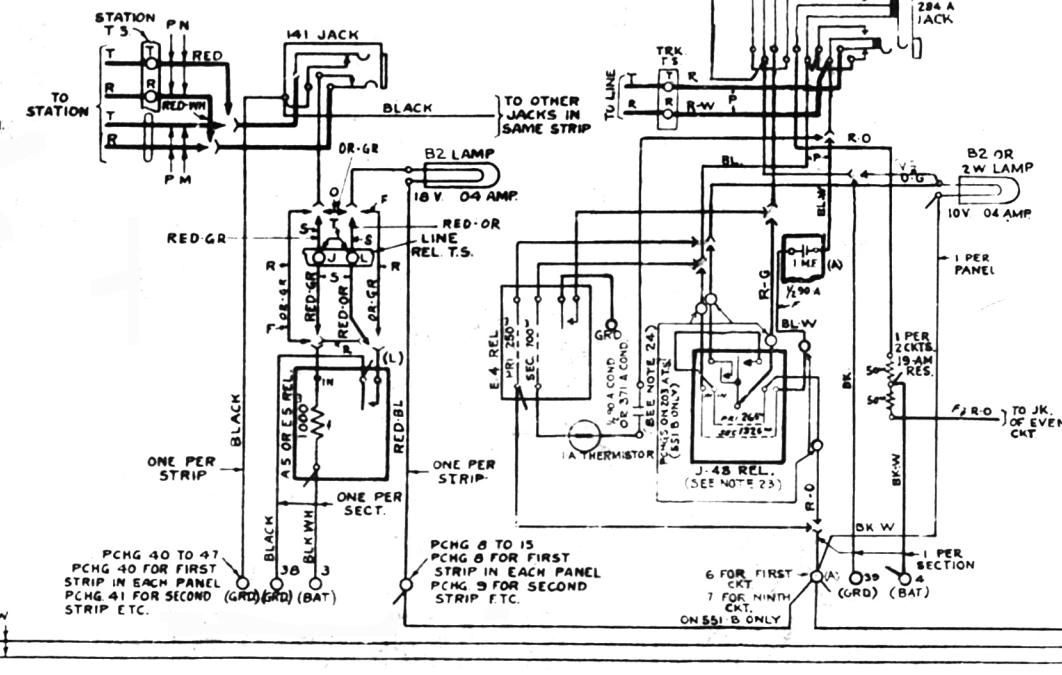

AUX. SIG. & BAT. KEY CKT.

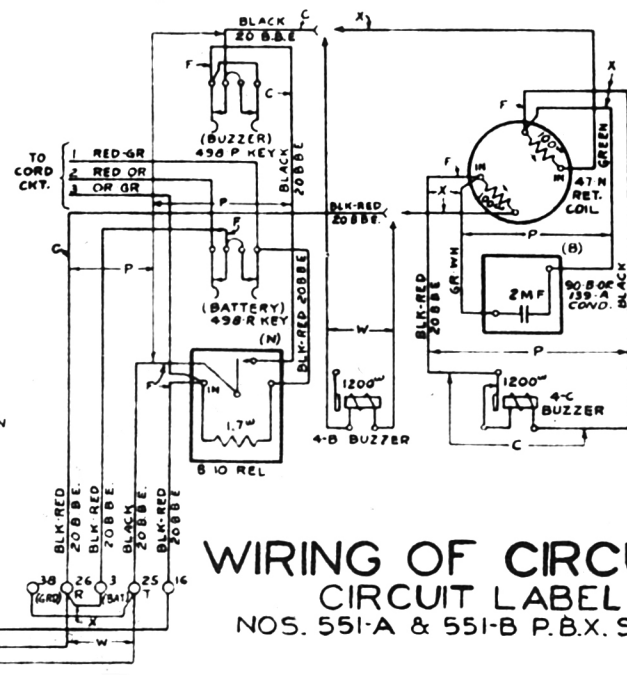

WIRING OF CIRCUITS

CIRCUIT LABEL

NOS. 551-A & 551-B P.B.X. SWBDS.