

SERVICE

1638C AND 1639D TELEPHONE SETS

1. GENERAL

1.001 This addendum supplements Section 502-611-404, Issue 1.

1.002 This addendum is issued to:

- Change Section Title
- Show 1638C and 1639D telephone sets MD.
- Revise polarity guard connections (Table A)
- Add 241B amplifier and T1A ringer

2. CONNECTIONS

The following changes apply to Part 2 of this section:

- (a) 2.08—Added
- (b) Table A—Revised
- (c) Fig. 1—Revised

2.08 1638C and 1639D telephone sets may be equipped with 241A (MD) or 241B amplifier. Connections for both amplifiers are the same.

TABLE A
P-90D197 POLARITY GUARD CONNECTIONS

LEAD	COLOR	REMOVE FROM	CONNECT TO
Line Switch	(W) [S-BR]	C*	S†
Headset Jack	(BK-S)		
Dial	(BK)	RR*	T†
Polarity Guard	(W)		C*
	(G)		RR*

* Network terminal

† Polarity guard terminal

Note: Polarity guards shall be installed when specified by local instructions for end-to-end signaling.

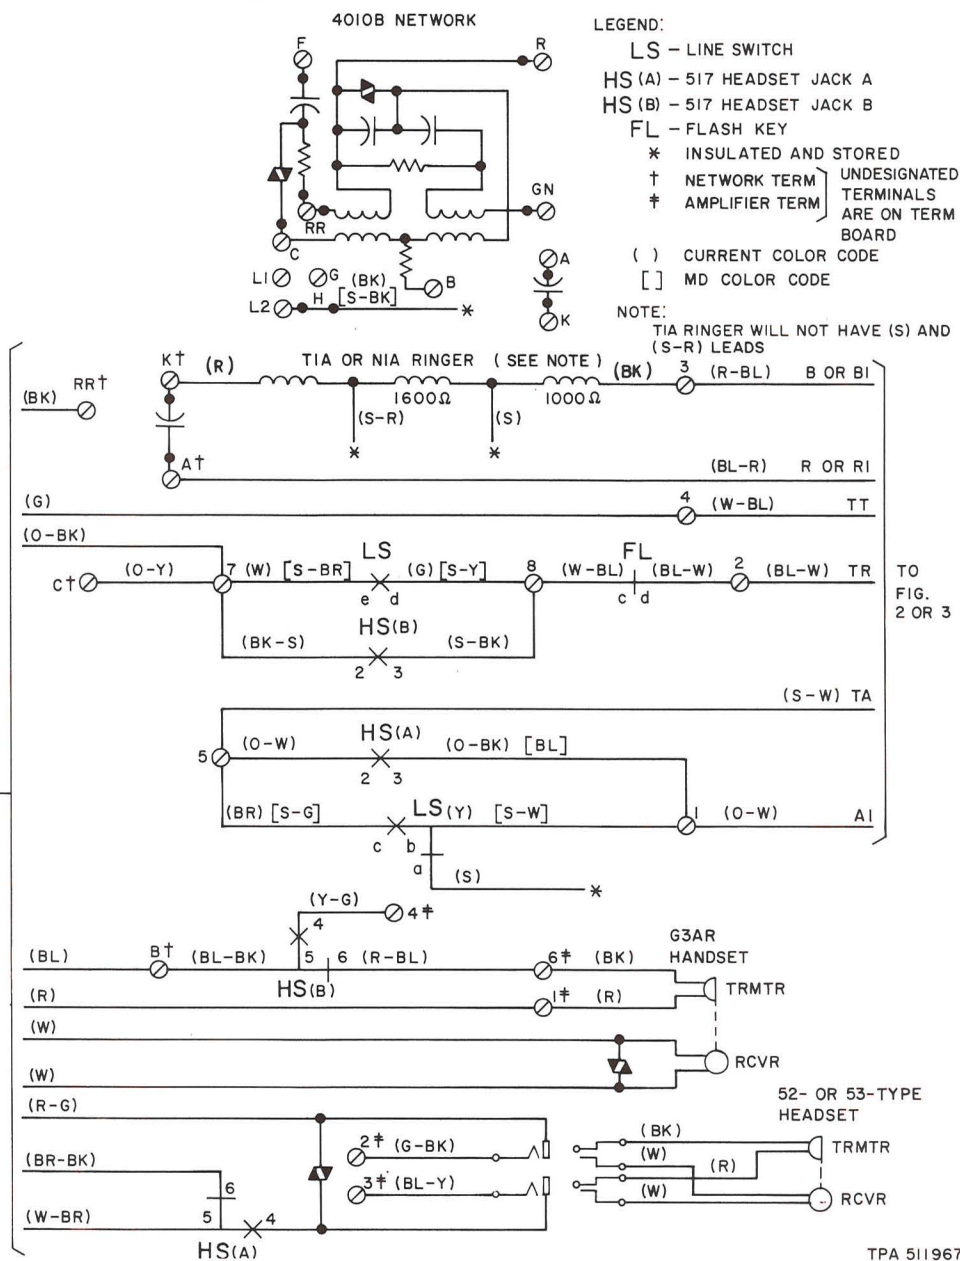
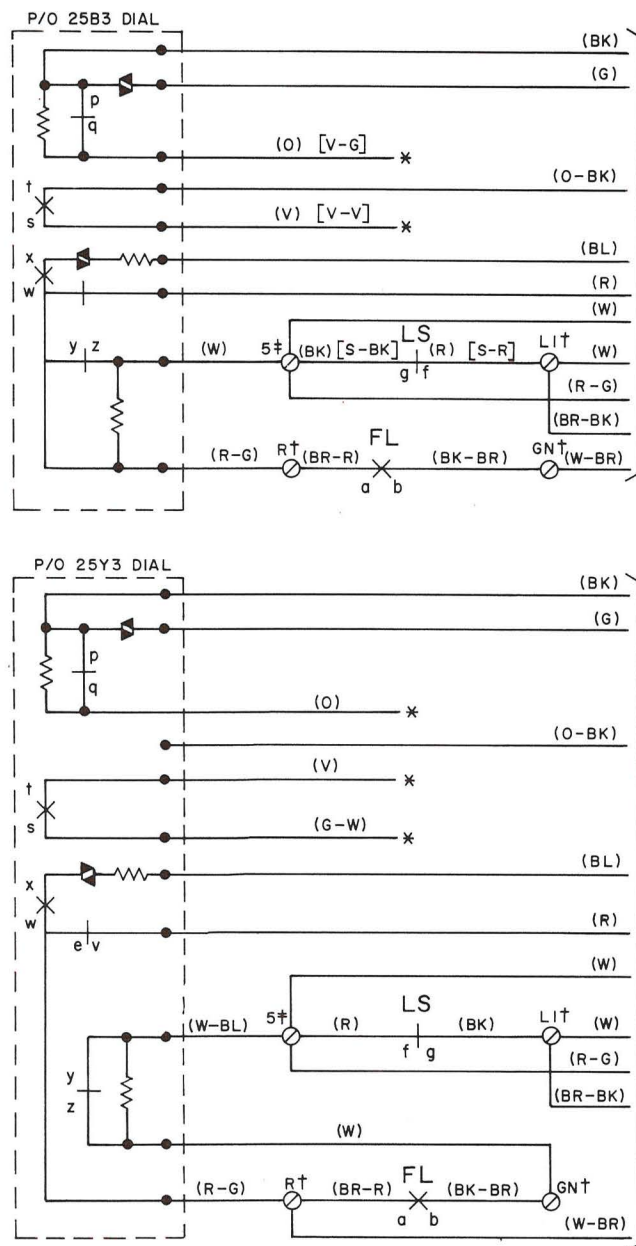


Fig. 1—1638C (MD) and 1639D (MD) Telephone Set, Connections