

HAND TELEPHONE SETS — 203A,B,C,D,E,F **DESK TYPE — COMMON BATTERY — CONNECTIONS.** **WITH INDUCTION COIL TYPE SUBSCRIBER SETS**

1.00 INTRODUCTION

This section covers the combination of apparatus, circuit diagrams, and connections for the 203A,B,C,D,E, and F desk-type hand telephone sets when used with induction coil type subscriber sets for either manual or dial common battery service.

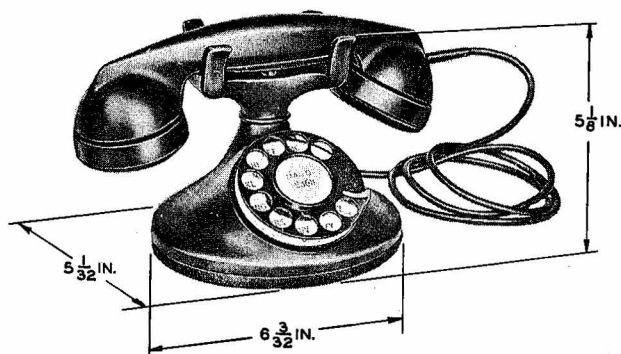


FIG. 1—203 TYPE

2.00 GENERAL

2.01 The 203A,B,C,D,E, and F may be used for all classes of service including party-on-tip stations of 2-party service when a message rate or tip party identification feature is required.

2.02 The 203A,B, and C types differ from the 203D, E, and F types only in the internal wiring arrangements as furnished.

2.03 The 203A and C differ from the 203B, and the 203D and F differ from the 203E, only in the type of dial number plate furnished. The 203B and E have the standard number plate with black letters and red numerals.

TABLE A—COMBINATION OF APPARATUS

Hand Tel. Set Code	Components				
	Handset	Handset Mounting	Dial or Apparatus Blank	Mounting Cord	Handset Cord
203B-3E 203E-3E (Modified)	E1E-3	D6-3	50J-3 94A-3	D6	H-3
203B-3F 203E-3F (Modified)	F1A-3 F1G-3				
203B-3F 203E-3F (Modified)	F4A-3				
203B-3E 203E-3E (As furnished)	E1E-3		4H or 5H		
203B-3F 203E-3F (As furnished)	F1A-3 F1G-3		5H or 6A		
203B-3F 203E-3F (Modified)	F4A-3		5H or 6A		

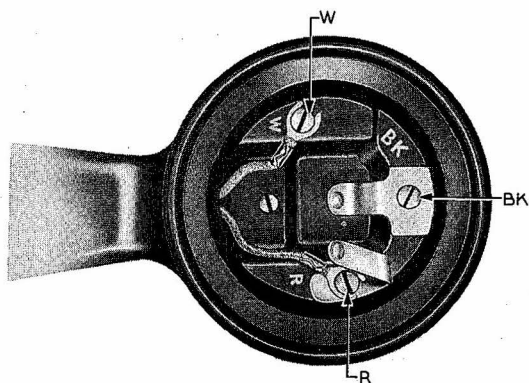


FIG. 2—F1- AND F4-TYPE HANDSET

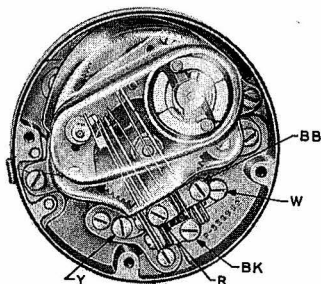


FIG. 3—6A-TYPE DIAL

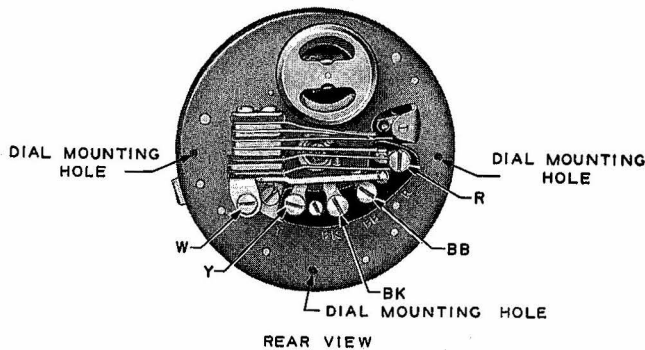


FIG. 4—5H-TYPE DIAL

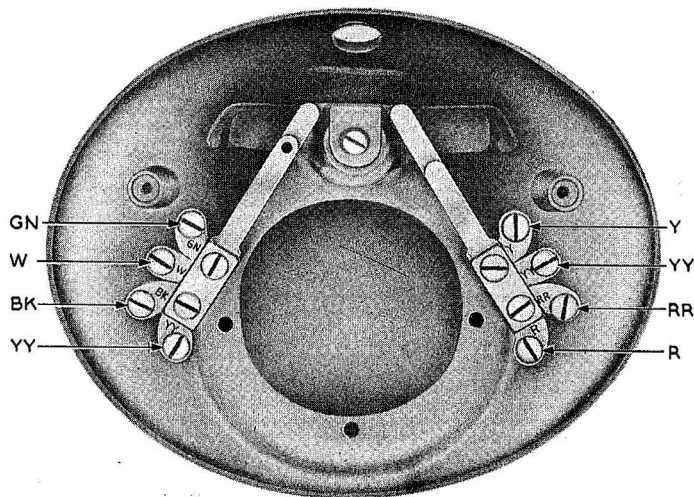


FIG. 5—D6-TYPE HANDSET MOUNTING

ASSOCIATED APPARATUS

TABLE B	Class of Service	Sub. Set
	Individual Lines 2-Party Flat Rate* 2-Party Message Rate (Manual and Dial Ring Party Only)* 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations	634A, BA 684A, BA
	4-Party Full Selective 8-Party Semiselective	634AT
*No message rate or tip party identification can be provided for party-on-tip stations.		
TABLE C	Class of Service	Sub. Set
	2-Party Flat Rate 2-Party Message Rate Where message rate or tip party identification is required for party-on-tip stations, only 1000-ohm tip-to-ground resistance can be provided, i.e., MR —All offices ZR —All offices AMA—Standard X-bar	634BC 684BC
May also be used for these classes of service: Individual Lines 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations		
TABLE D	Class of Service	Sub. Set
	2-Party Flat Rate 2-Party Message Rate Where message rate or tip party identification is required for party-on-tip stations, both 1000- and 3640-ohm tip-to-ground resistance can be provided, i.e., MR —All offices AMA—Mod. X-bar ZR —All offices AMA—SxS AMA—Std. X-bar AT —SxS	634CE
May also be used for these classes of service: Individual Lines 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations		

