

TELEPHONE SETS — 1500D CONNECTIONS

TABLE A
POLARITY GUARD CONNECTIONS
(P-90D052 GUARD ASSEMBLY)

LEAD		REMOVE FROM	CONNECT TO	
		NET.	NET.	POLARITY GUARD
Dial	BK	RR		T
Line Switch	*	C		S
Polarity Guard	G W		RR C	

* Depending on class of service per Table B.

TABLE B
LINE AND RINGER CONNECTIONS

WIRE LEAD		INDIVID. OR BRIDGED	RING PARTY	TIP PARTY		
				NO IDENT GROUND	IDENTIFYING GROUND	
					1000Ω	2650Ω
Mounting Cord at Connecting Block	R G Y	R G G	R G Y	R G Y	G R Y	G R Y
Ringer Leads	R BK S S-R	L2 G K A	L2 G K A	L1 G K A	K G B B	B B K G
Switch Hook Leads	(S) (W) [S-W] (BR) [S-BR]	L2 F C	L2 F C	L2 F C	A C F	A C F

Notes: To permanently silence ringer, insulate and store.

1. For all classes of service except identifying ground — (BK) ringer lead.
2. For 1000 ohm ground — (S-R) ringer lead.
3. For 2650 ohm ground — (BK) ringer lead.



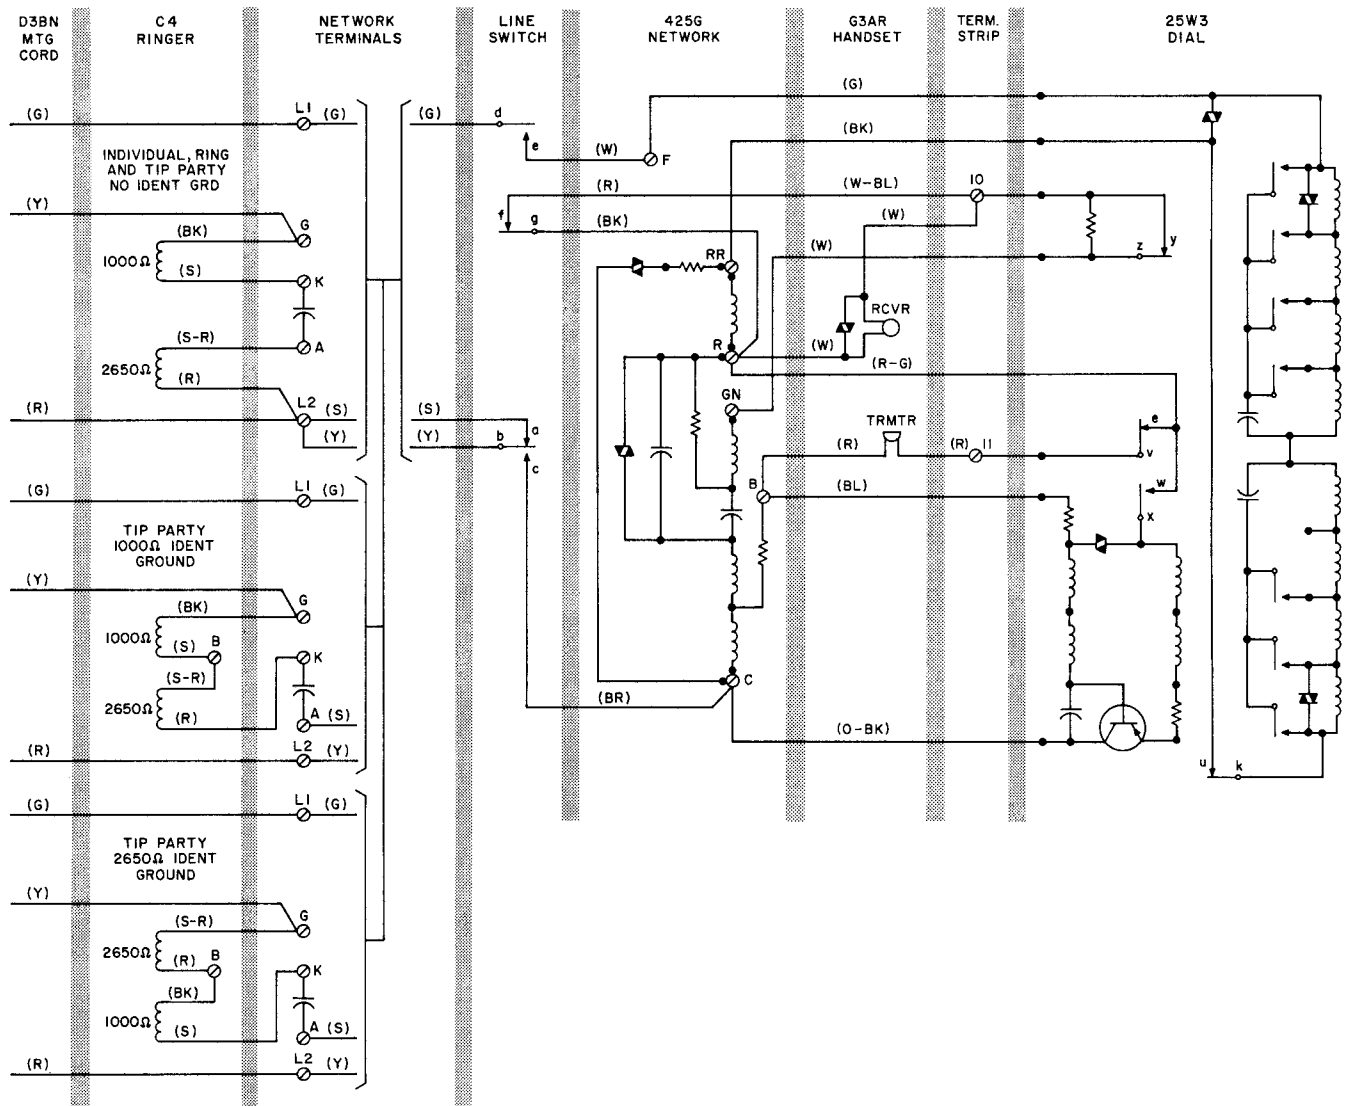


Fig. 2 — 1500D Telephone Set Connections, With 25W3 Dial