

TABLE A
P-90D053 POLARITY GUARD CONNECTIONS

LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	POLARITY GUARD
Line Switch	W	C		S
Dial	BK	RR		T
Polarity Guard	W		C	
	G		RR	

Note: For use when specified by local instructions for end-to-end signaling installations.

CONNECTIONS

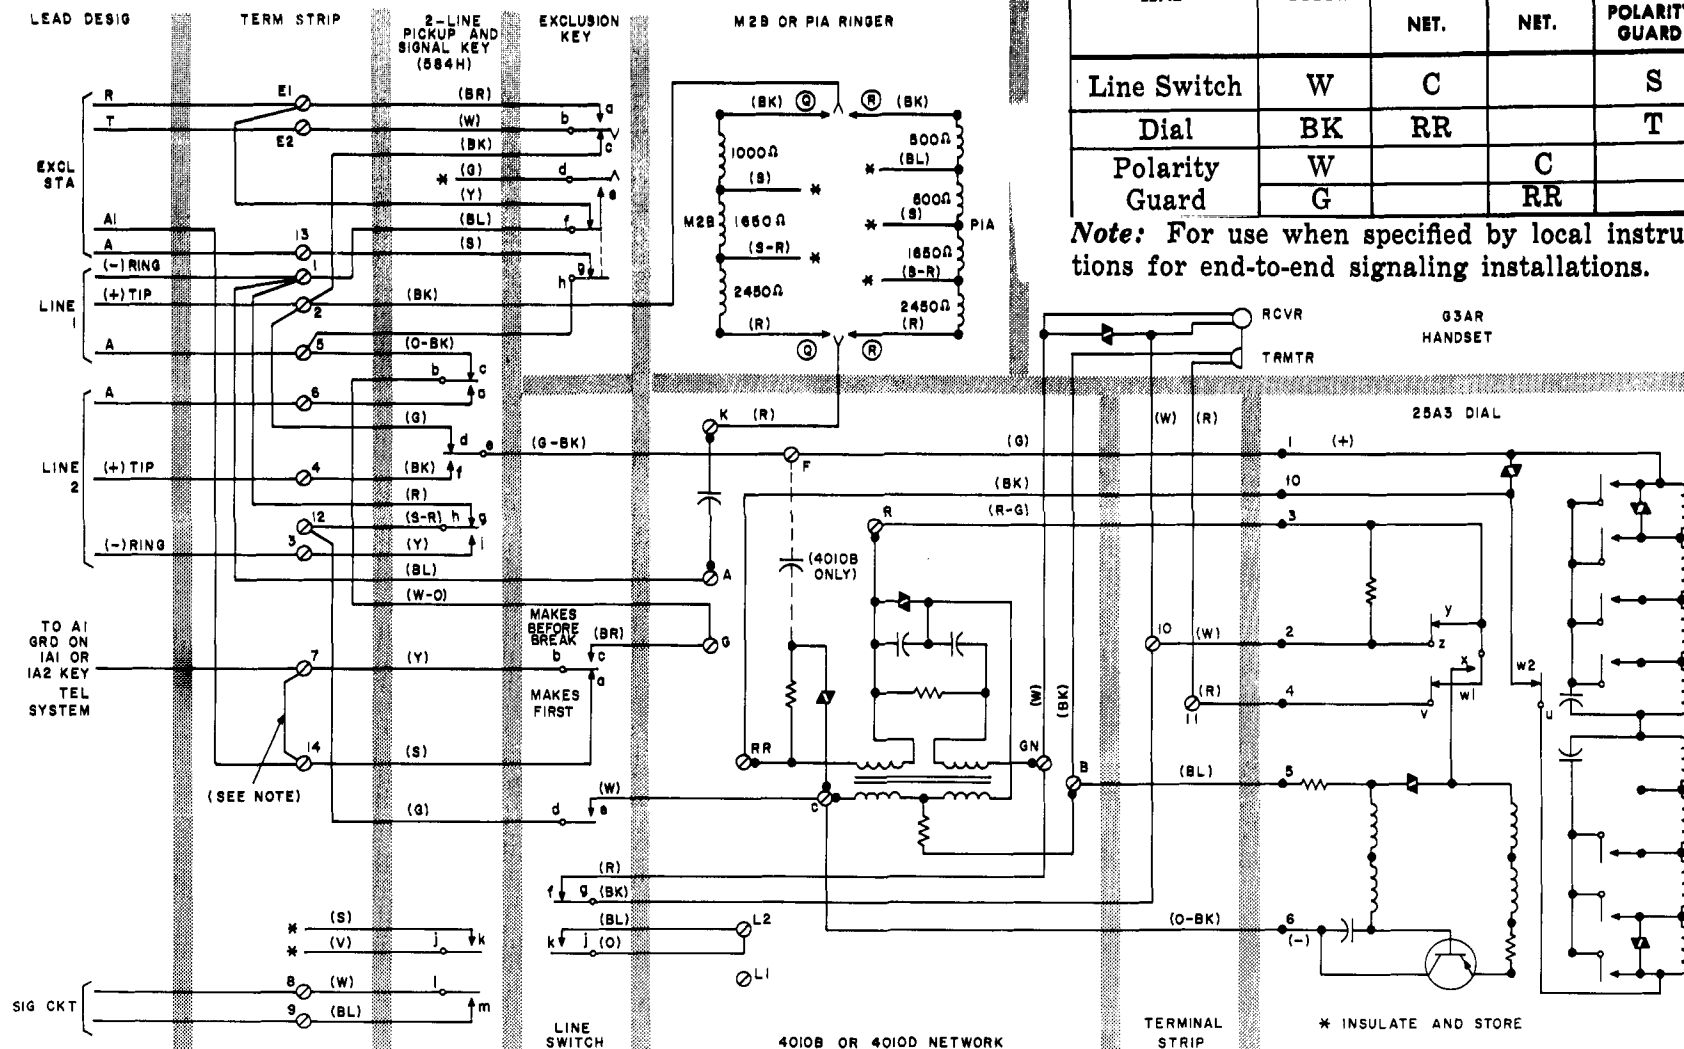


Fig. 1 — 2-Line Pickup With Exclusion on Line 1, Signaling, Wired for 1A1 and 1A2 Key Telephone Systems (With 25A3 Dial)

NOTE:
PROVIDE A1 GROUND AT EXCLUDED STATION
OR PLACE STRAP AS SHOWN.

* INSULATE AND STORE.

Ⓚ M2B RINGER

Ⓡ PIA RINGER

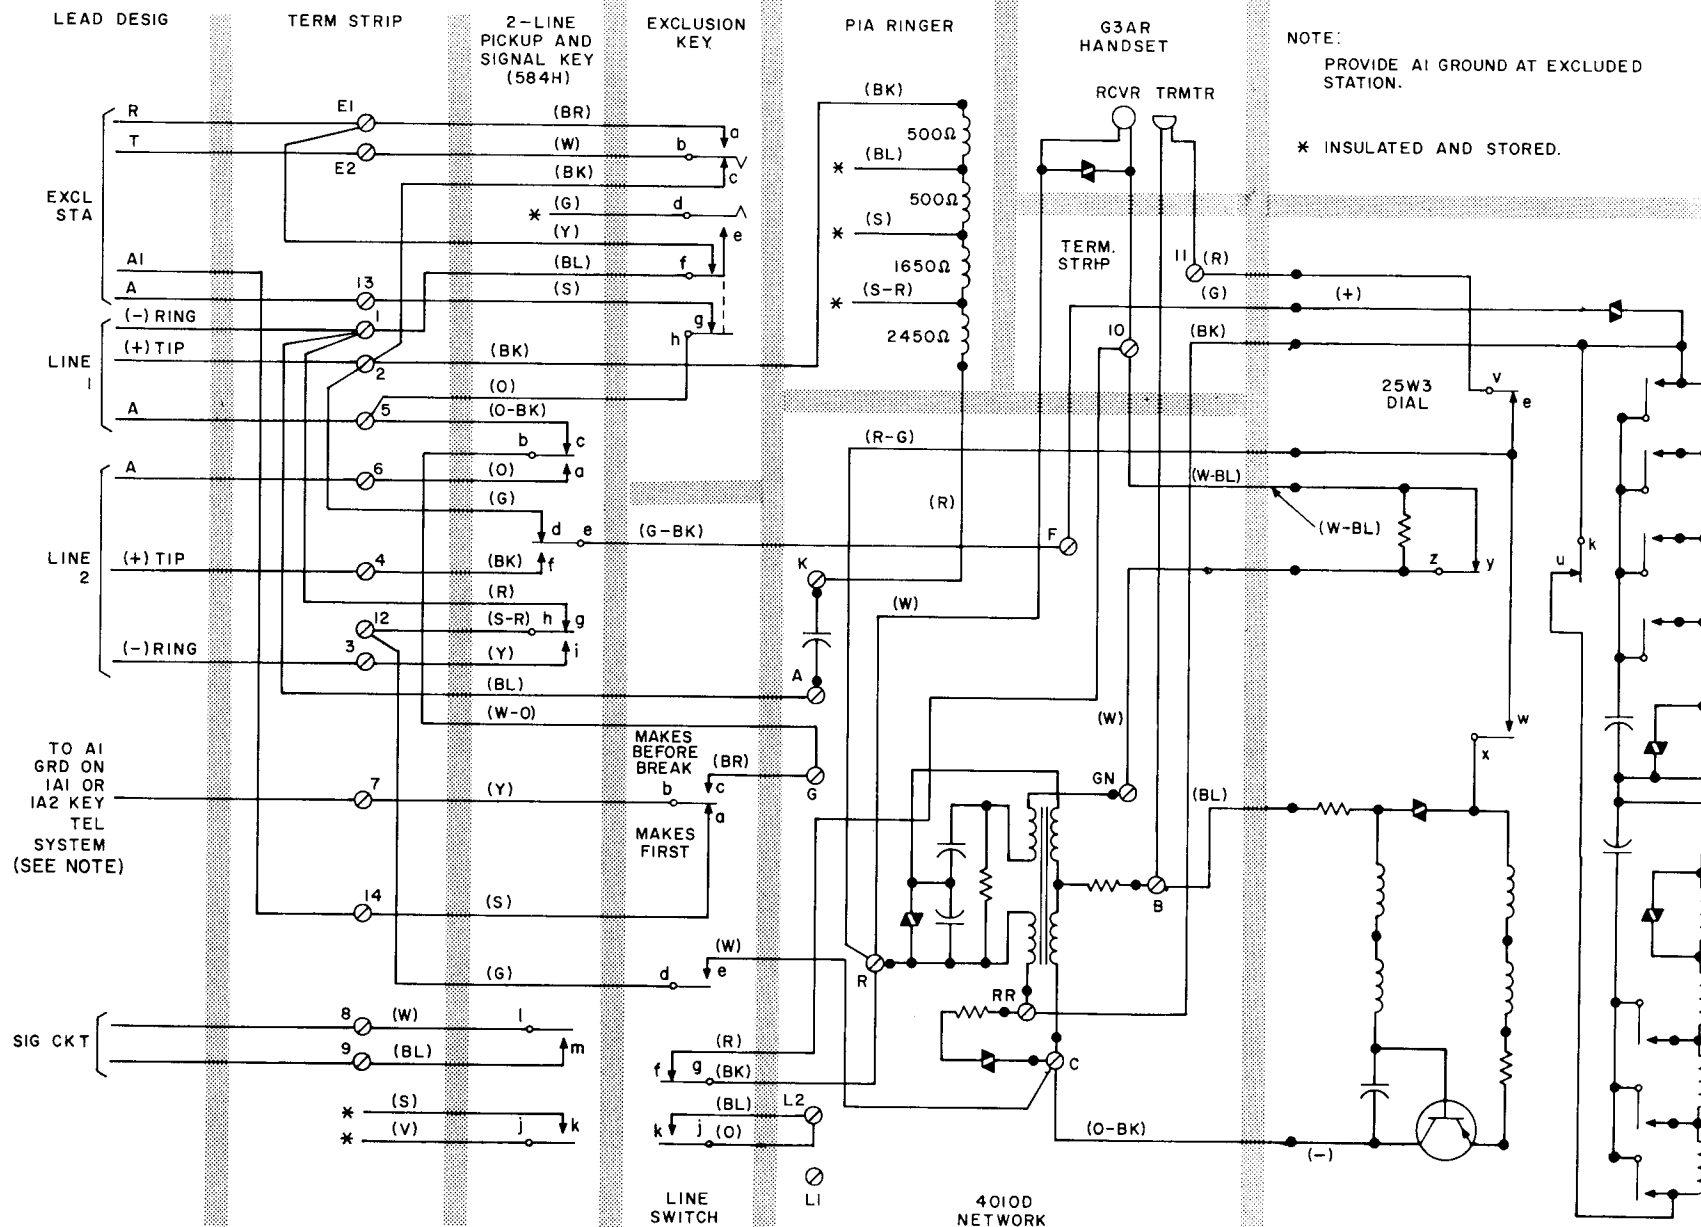


Fig. 2 — 2-Line Pickup With Exclusion on Line 1, Signaling, Wired for 1A1 and 1A2 Key Telephone Systems (With 25W3 Dial)

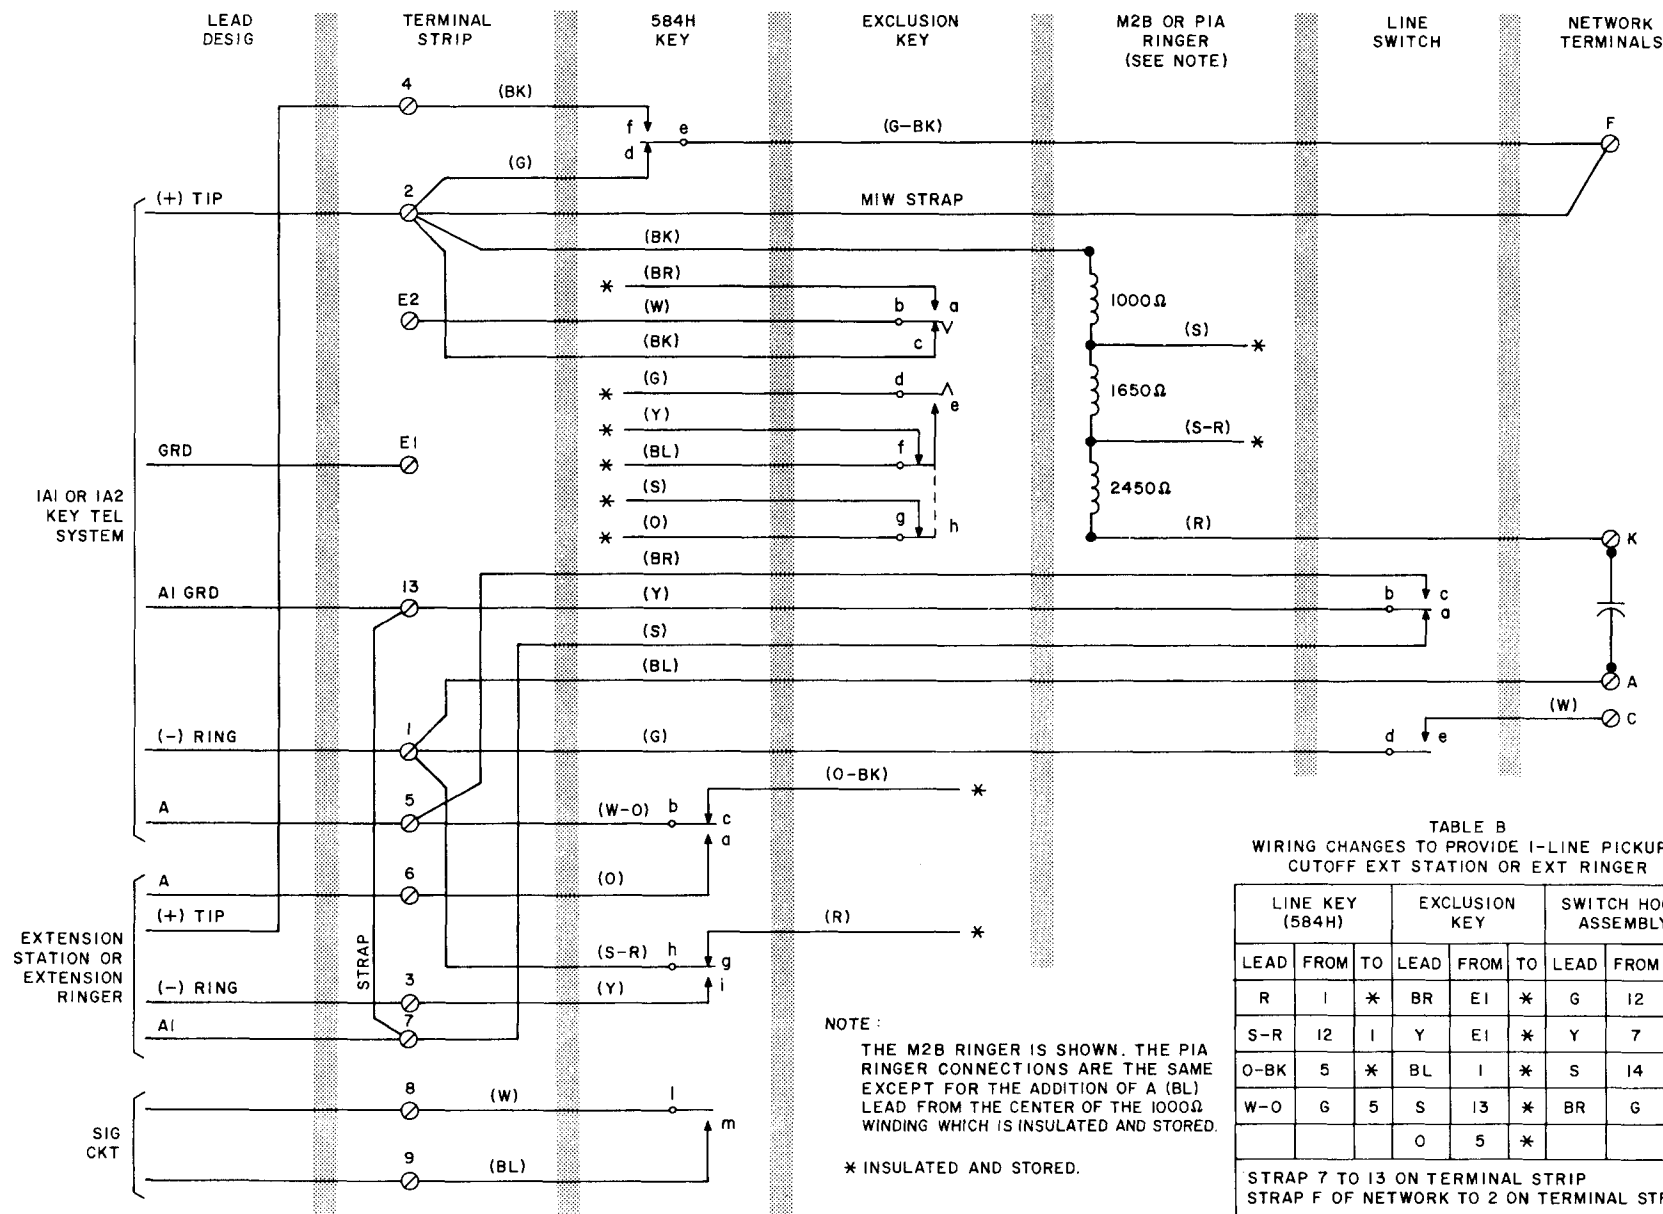


Fig. 3 — 1-Line Pickup, Cutoff Extension Station or Extension Line Ringer

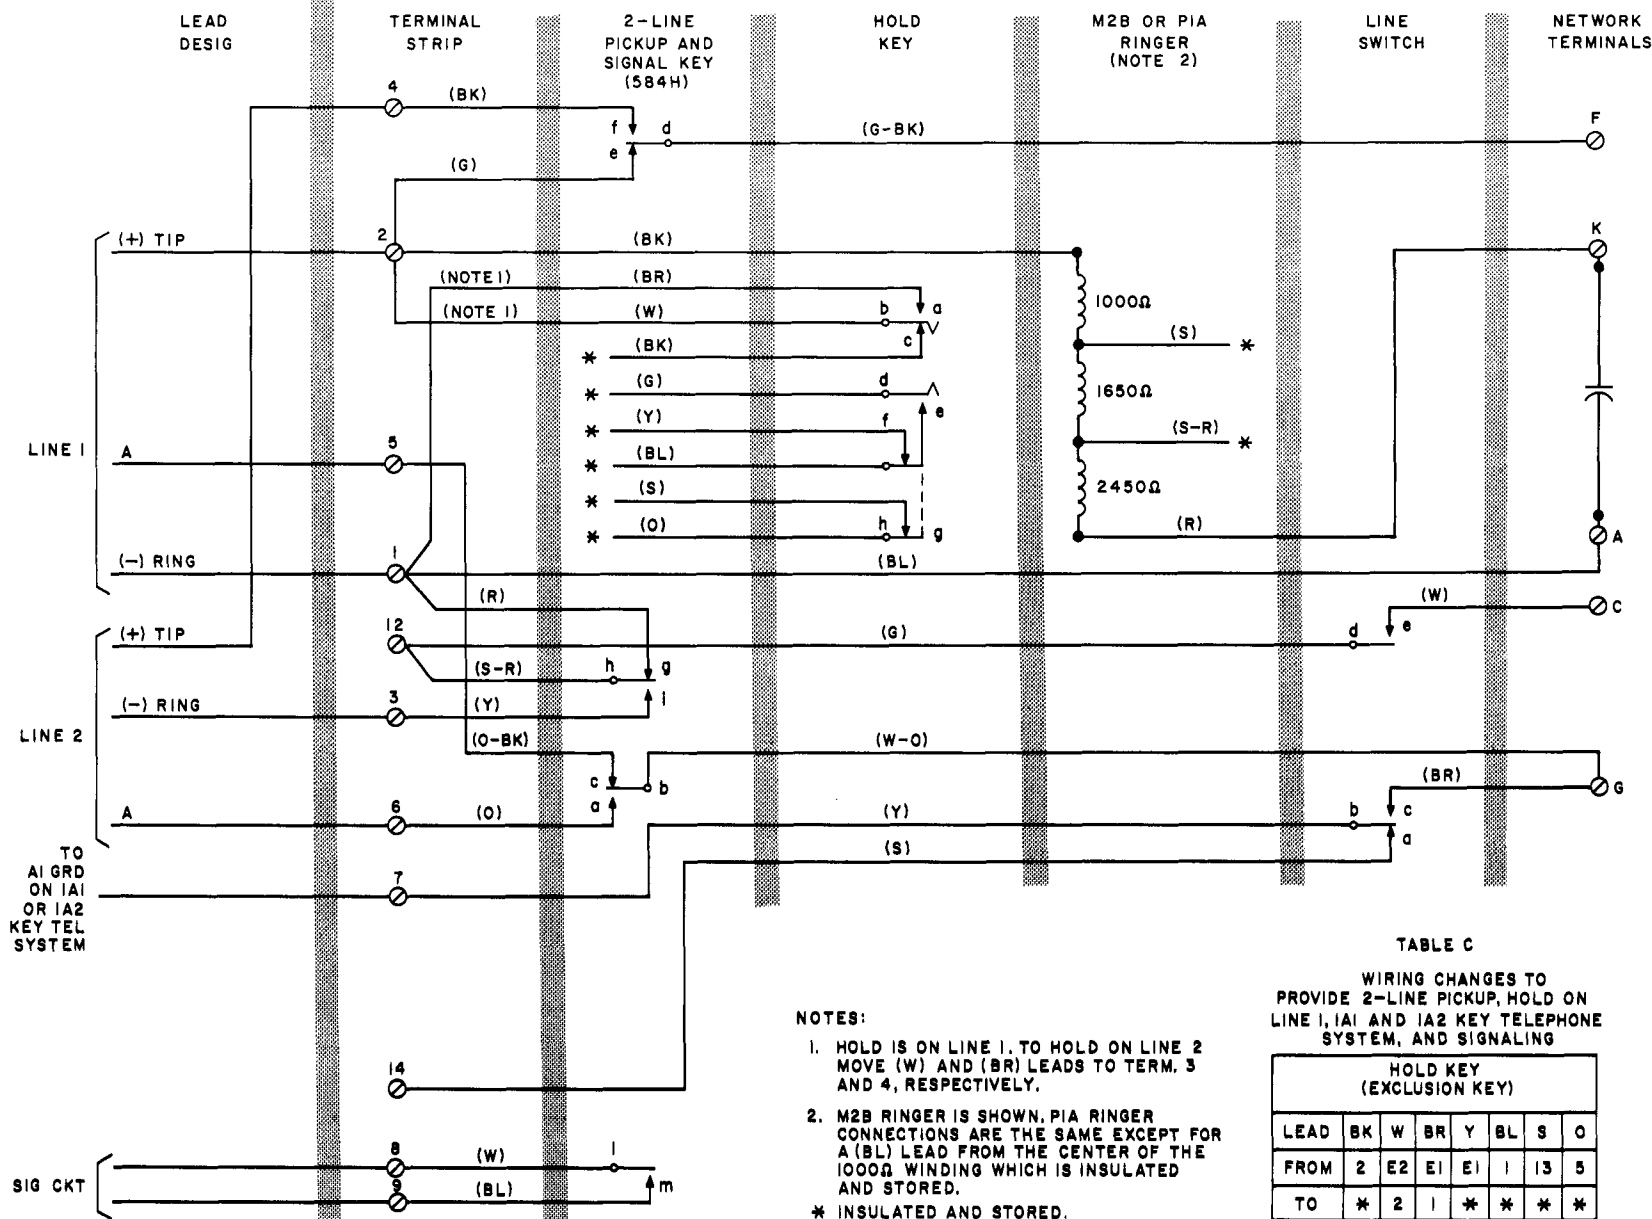


Fig. 4 — 2-Line Pickup, Hold on Line 1, Used With 1A1 and 1A2 Key Telephone Systems and Signaling

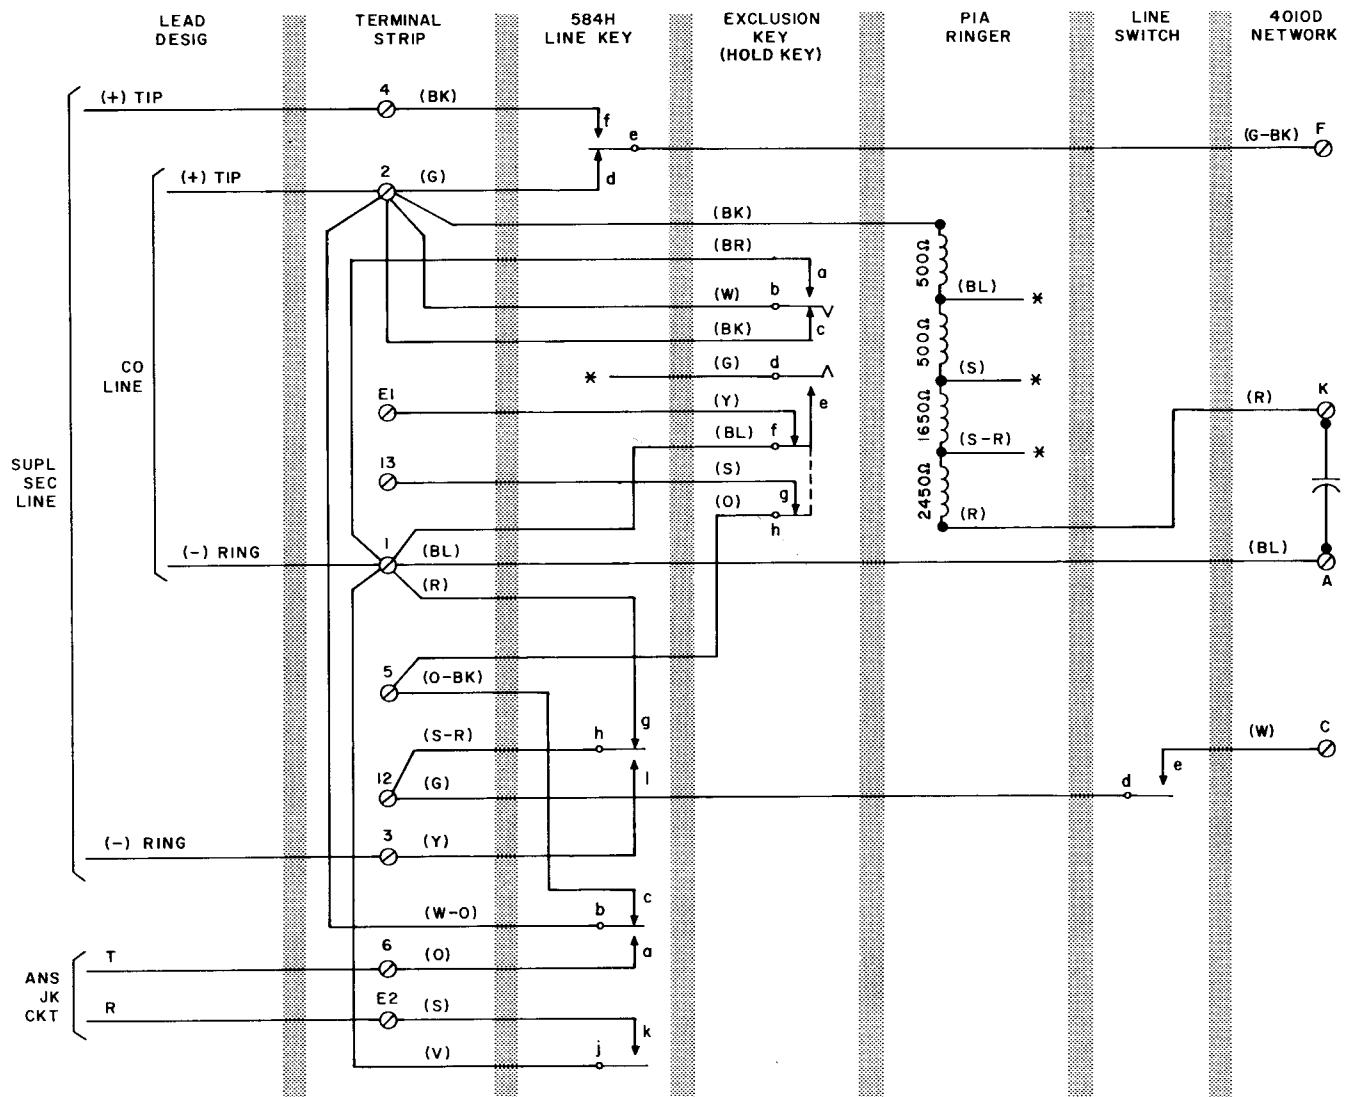


TABLE D
WIRING CHANGES TO PROVIDE
SECRETARIAL SERVICE WITH HOLD

584H LINE KEY			EXCLUSION KEY		
LEAD	FROM	TO	LEAD	FROM	TO
(W-O)	G	2	(W)	E2	2
(S)	*	E2	(BR)	E1	1
(V)	*	1			

* STORED LOCATION

Fig. 5 — 1558D Telephone Set Connections For Secretarial Service with Hold