

SERVICE

554A/B, 554F, 554AM, 554BM, 554AMP, AND 554BMP TELEPHONE SETS

1. GENERAL

- 1.01 Reissued to add 554AM and 554AMP (modular) telephone sets, Fig. 2 and 4.

♦ TABLE A ♦
LINE AND RINGER CONNECTIONS

WIRE OR LEAD	COLOR	INDI- VIDUAL OR BRIDGED	RINGER PARTY	TIP PARTY NO IDENT GROUND	TIP PARTY IDENT GROUND			
					NORMAL CONNECTIONS		TO SILENCE RINGER PERMANENTLY	
					1000Ω	2650Ω	1000Ω	2650Ω
Ringer Leads	R	L2	L2	L2	K	B	K	B
	BK	L1	G	G	G	B	G	K
	S	K	K	K	B	K	B	K
	S-R	A	A	A	B	G	K	G
Line Switch	S	L2	L2	L2	A	A	L2	L2
Line Wire or 523A3 Plug in Set	Ring	R	L2	L2	L1	L1	L1	L1
	Tip	G	L1	L1	L2	L2	L2	L2
	Grd	Y	G	G	G	G	G	G
	—	BK	*	*	*	*	*	*
To silence ringer for all classes of service except tip party ground identification, connect R and BK ringer leads on K terminal of 425E network.								

* Insulate and store (line wire only).

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement


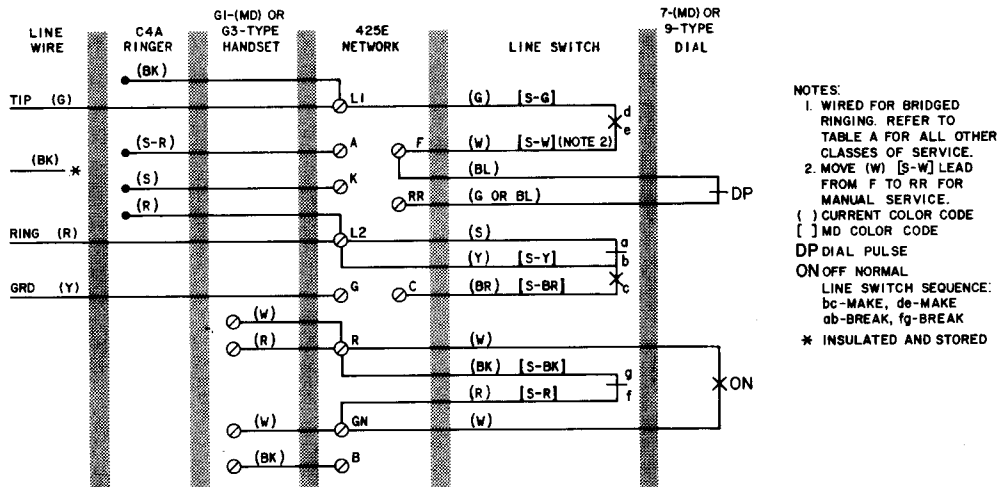


Fig. 1—554A/B and F Telephone Sets, Connections

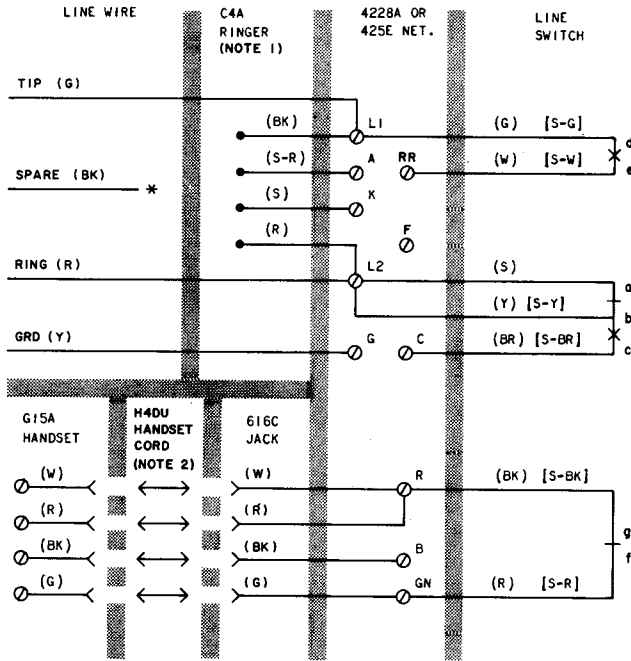

NOTES:

1. WIRED FOR BRIDGED RINGING. REFER TO TABLE A FOR ALL OTHER CLASSES OF SERVICE.
 2. H4DU HANDSET CORD MUST BE ORDERED SEPARATELY.
- * INSULATED AND STORED

() CURRENT COLOR CODE
 [] MD COLOR CODE
 DP - DIAL PULSE
 ON - DIAL OFF-NORMAL
 LINE SWITCH OFF-HOOK
 SEQUENCE:
 bc - MAKE
 de - MAKE
 ab - BREAK
 fg - BREAK

Fig. 2—554AM Telephone Set, Connections


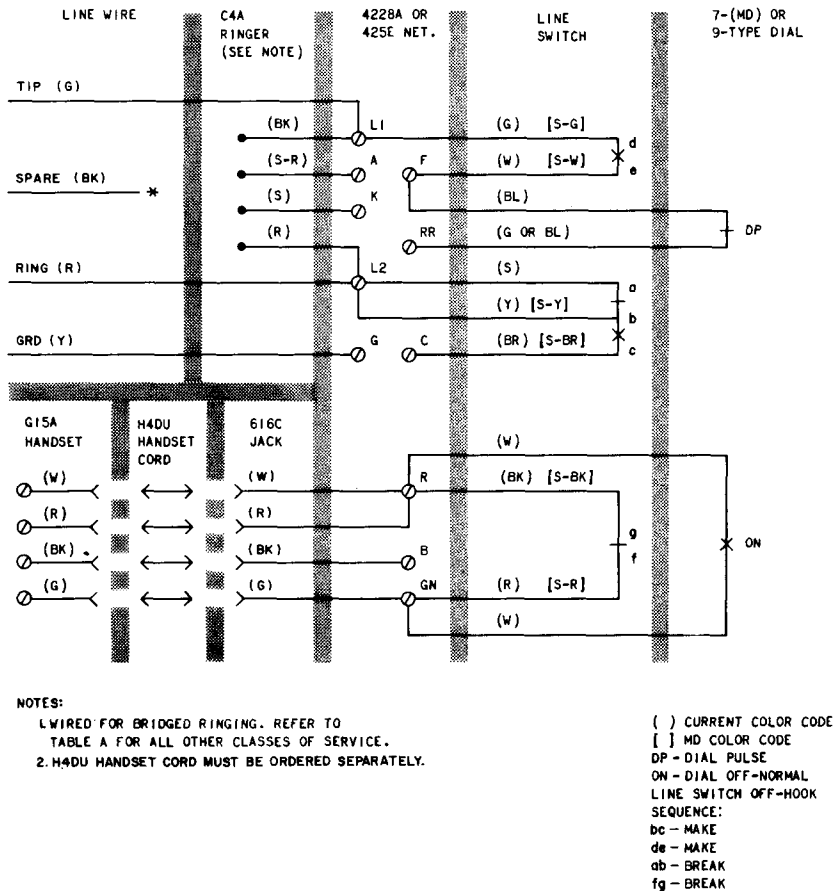


Fig. 3—554BM Telephone Set, Connections

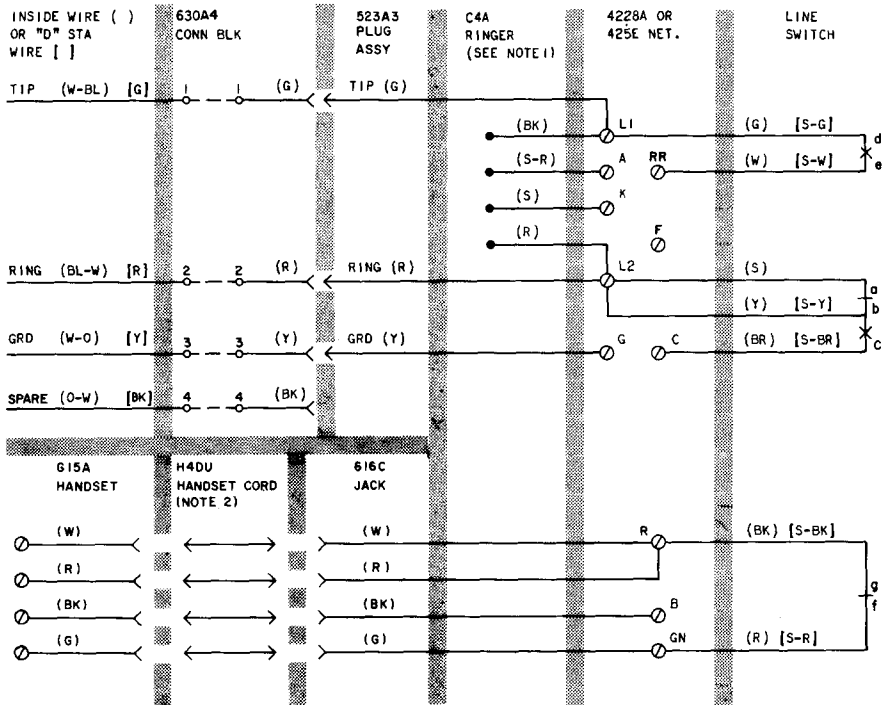


NOTES:

1. WIRED FOR BRIDGED RINGING. REFER TO TABLE A FOR ALL OTHER CLASSES OF SERVICE.
2. H4DU HANDSET CORD MUST BE ORDERED SEPARATELY.

() CURRENT COLOR CODE
 [] MD COLOR CODE
 DP - DIAL PULSE
 ON - DIAL OFF-NORMAL
 LINE SWITCH OFF-HOOK SEQUENCE:
 bc - MAKE
 de - MAKE
 ab - BREAK
 fg - BREAK

Fig. 4—554AMP Telephone Set, Connections

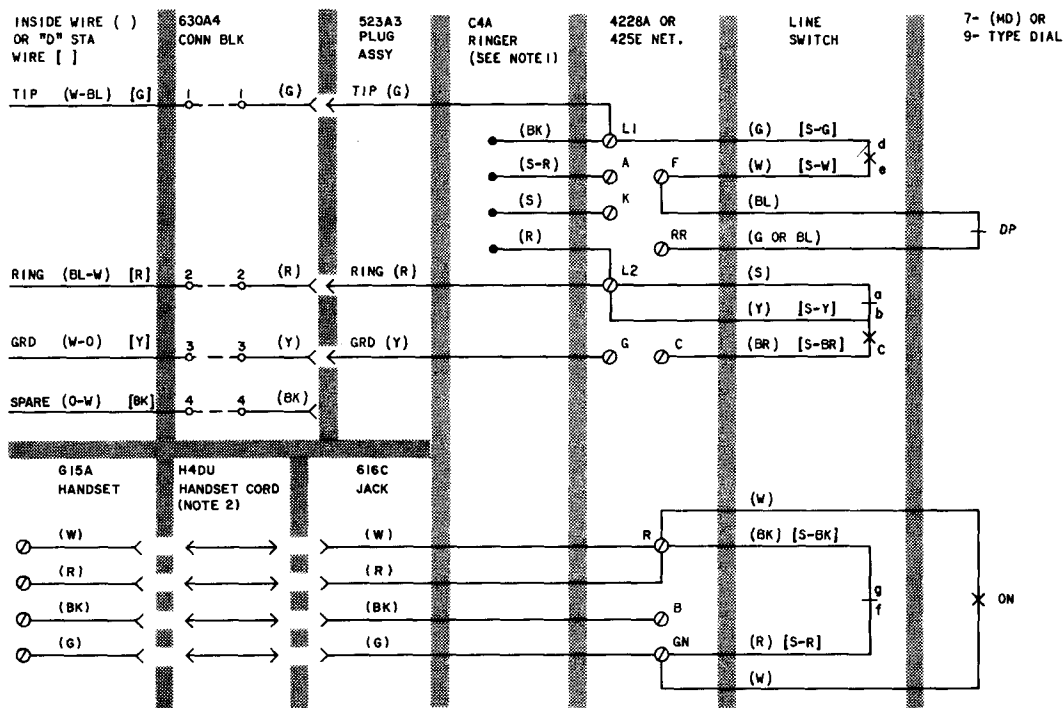

NOTES:

1. WIRED FOR BRIDGED RINGING. REFER TO TABLE A FOR ALL OTHER CLASSES OF SERVICE.
2. H4DU HANDSET CORD MUST BE ORDERED SEPARATELY.

() CURRENT COLOR CODE
 [] MD COLOR CODE
 DP - DIAL PULSE
 ON - DIAL OFF-NORMAL
 LINE SWITCH OFF-HOOK SEQUENCE:
 bc - MAKE
 de - MAKE
 ab - BREAK
 fg - BREAK

Fig. 5—554BMP Telephone Set, Connections