

SERVICE
510A, B, E, F, AND FM TELEPHONE SETS

1. GENERAL


- Delete information on 510AM, BM, and EM telephone sets (never manufactured)

1.01 Reissued to:

- Show 510A, B, E, and F telephone sets MD

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

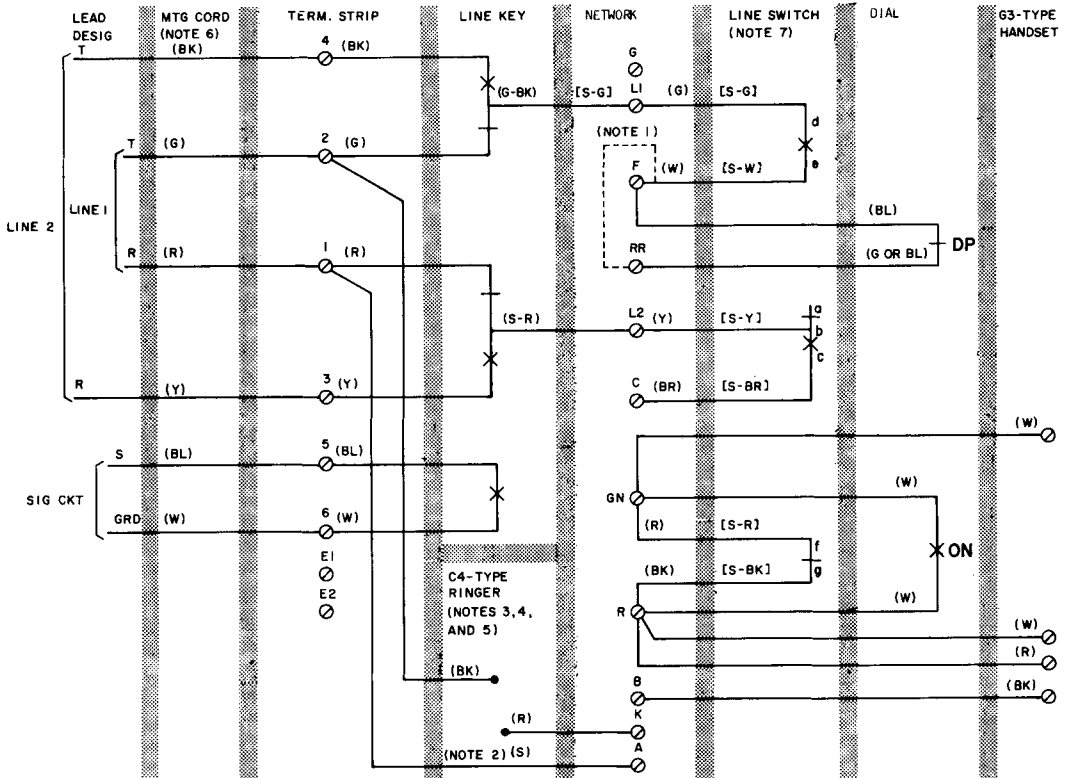

NOTES:

1. CONNECT (W) OR [S-W] LEAD TO TERMINAL RR OF NETWORK IN MANUAL SETS.
2. SETS ARE FACTORY WIRED FOR BRIDGED RINGING SERVICE. CONNECTIONS FOR C4B RINGER SHOWN. CONNECTIONS FOR C4A RINGER (USED ON 510 A/B) AS FOLLOWS:
(BK) TO 2 OF TERM. STRIP
(S) TO K OF NETWORK
(S-R) TO A OF NETWORK
(R) TO 1 OF TERM. STRIP
REMOVE (S) STRAP FROM A OF NETWORK AND 1 OF TERM. STRIP.
3. TO SILENCE RINGER FOR ALL CLASSES OF SERVICE REFER TO APPROPRIATE SECTION IN DIVISION 501.
4. RINGER CONNECTIONS PROVIDE FOR RINGING ON LINE 1. FOR RINGING ON LINE 2, CONNECT (BK) RINGER LEAD AND (S) STRAP LEAD TO TERMINALS 4 AND 3 RESPECTIVELY.

5. A 7-TYPE BUZZER ON A 44B BRACKET MAY BE SUBSTITUTED FOR THE RINGER AS A COMMON OR PRIVATE LINE AUDIBLE SIGNAL.
6. 510A AND B SETS ARE EQUIPPED WITH D4BJ OR D4BK MTG CORD WHICH DOES NOT PROVIDE SIGNAL CKT LEADS. 510E AND F SETS ARE EQUIPPED WITH D6AA MTG CORD.
7. LINE SWITCH SEQUENCE, HANDSET REMOVED:
bc - MAKES
de - MAKES
ab - BREAKS
fg - BREAKS
DP - DIAL PULSE CONTACTS
ON - DIAL OFF-NORMAL CONTACTS
() - CURRENT COLOR CODE
[] - MD COLOR CODE

Fig. 1—510A (MD), B (MD), E (MD), and F (MD) Telephone Sets, Connections

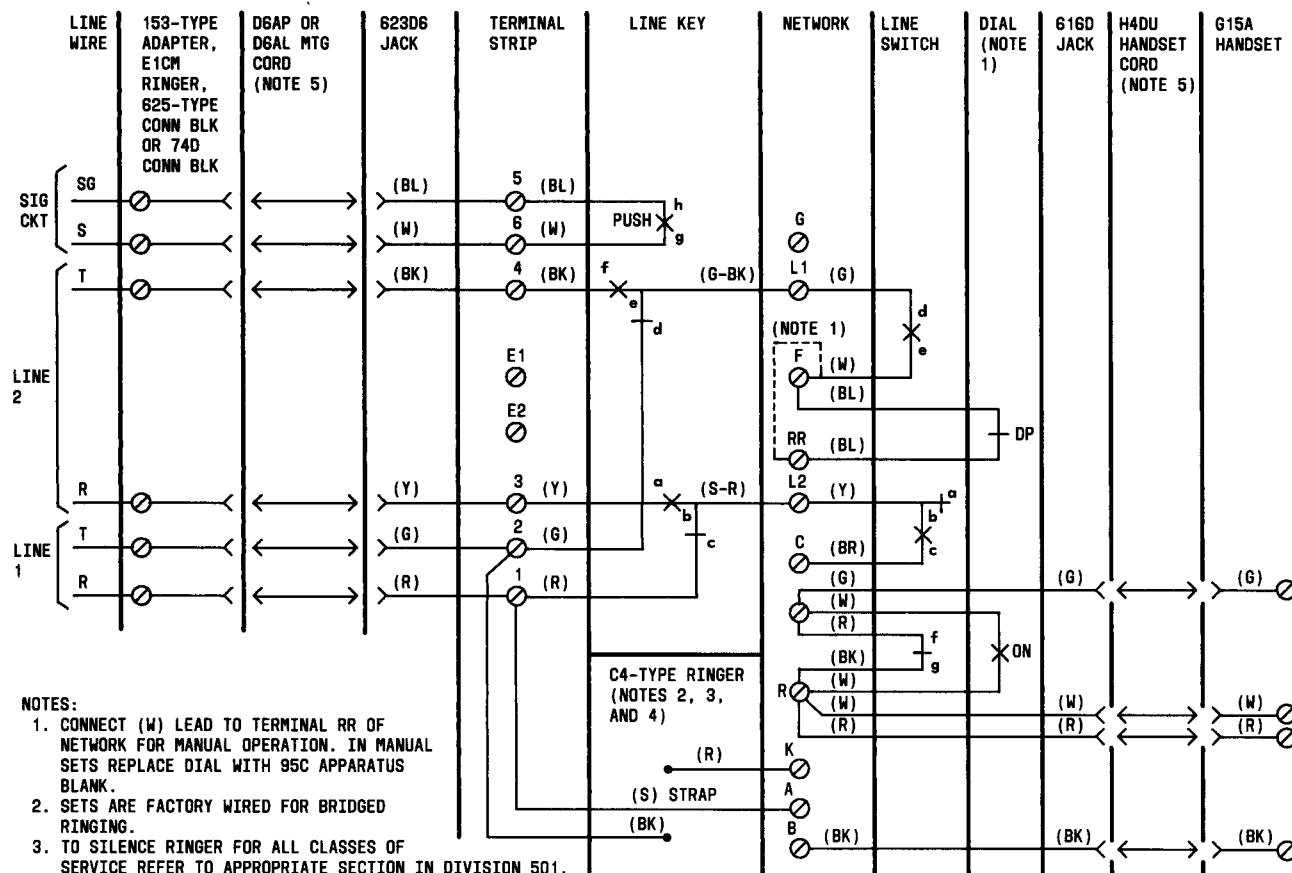


Fig. 3—510FM Telephone Set, Connections