



The 3A cord reels shall be used when the telephone set is subjected to temperatures below 40 degrees F. The 3B cord reel shall be used when the telephone set is not subjected to temperatures below 40 degrees F.

TABLE A
CONNECTIONS FOR P-90D060 POLARITY
GUARD ASSEMBLY

WIRE OR LEAD		REMOVE FROM	CONNECT TO
Switch Hook	(W)	C of Net.	S of P.G.
Dial	(BK)	RR of Net.	T of P.G.
Polarity Guard	(W) (G)		C of Net. RR of Net.

Note: For use when specified by local instructions for end-to-end signaling installations.

TABLE B
CONVERSION FOR 1-LINE PICKUP, SIGNALING, AND CUTOFF FEATURE

WIRE OR LEAD		REMOVE FROM			CONNECT TO			INSULATE AND STORE
		TB1	TB2	NET.	TB1	TB2	NET.	
Switch Hook Assembly	(BR)			G		3		
	(G)			L2	1			
Exclusion or Hold Key	(BR)		9					•
	(W)		10					•
	(BK)	2						•
	(Y)	1						•
	(BL)		9					•
	(S)		3					•
	(O)		8					•
584G Line Key	(G-BK)			F	2			
	(G)	2						•
	(O-BK)		3					•
	(W-O)			G		3		
	(R)	1						•
	(S-R)			L2	1			
	(W)		11			10		
M1W cord or Equivalent	(BL)		7			9		
	Strap				2		F	



The 3A cord reels shall be used when the telephone set is subjected to temperatures below 40 degrees F. The 3B cord reel shall be used when the telephone set is not subjected to temperatures below 40 degrees F.

TABLE A
CONNECTIONS FOR P-90D060 POLARITY
GUARD ASSEMBLY

WIRE OR LEAD		REMOVE FROM	CONNECT TO
Switch Hook	(W)	C of Net.	S of P.G.
Dial	(BK)	RR of Net.	T of P.G.
Polarity Guard	(W) (G)		C of Net. RR of Net.

Note: For use when specified by local instructions for end-to-end signaling installations.

TABLE B
CONVERSION FOR 1-LINE PICKUP, SIGNALING, AND CUTOFF FEATURE

WIRE OR LEAD		REMOVE FROM			CONNECT TO			INSULATE AND STORE
		TB1	TB2	NET.	TB1	TB2	NET.	
Switch Hook Assembly	(BR)			G		3		
	(G)			L2	1			
Exclusion or Hold Key	(BR)		9					•
	(W)		10					•
	(BK)	2						•
	(Y)	1						•
	(BL)		9					•
	(S)		3					•
	(O)		8					•
584G Line Key	(G-BK)			F	2			
	(G)	2						•
	(O-BK)		3					•
	(W-O)			G		3		
	(R)	1						•
	(S-R)			L2	1			
	(W)		11			10		
M1W cord or Equivalent	(BL)		7			9		
	Strap				2		F	

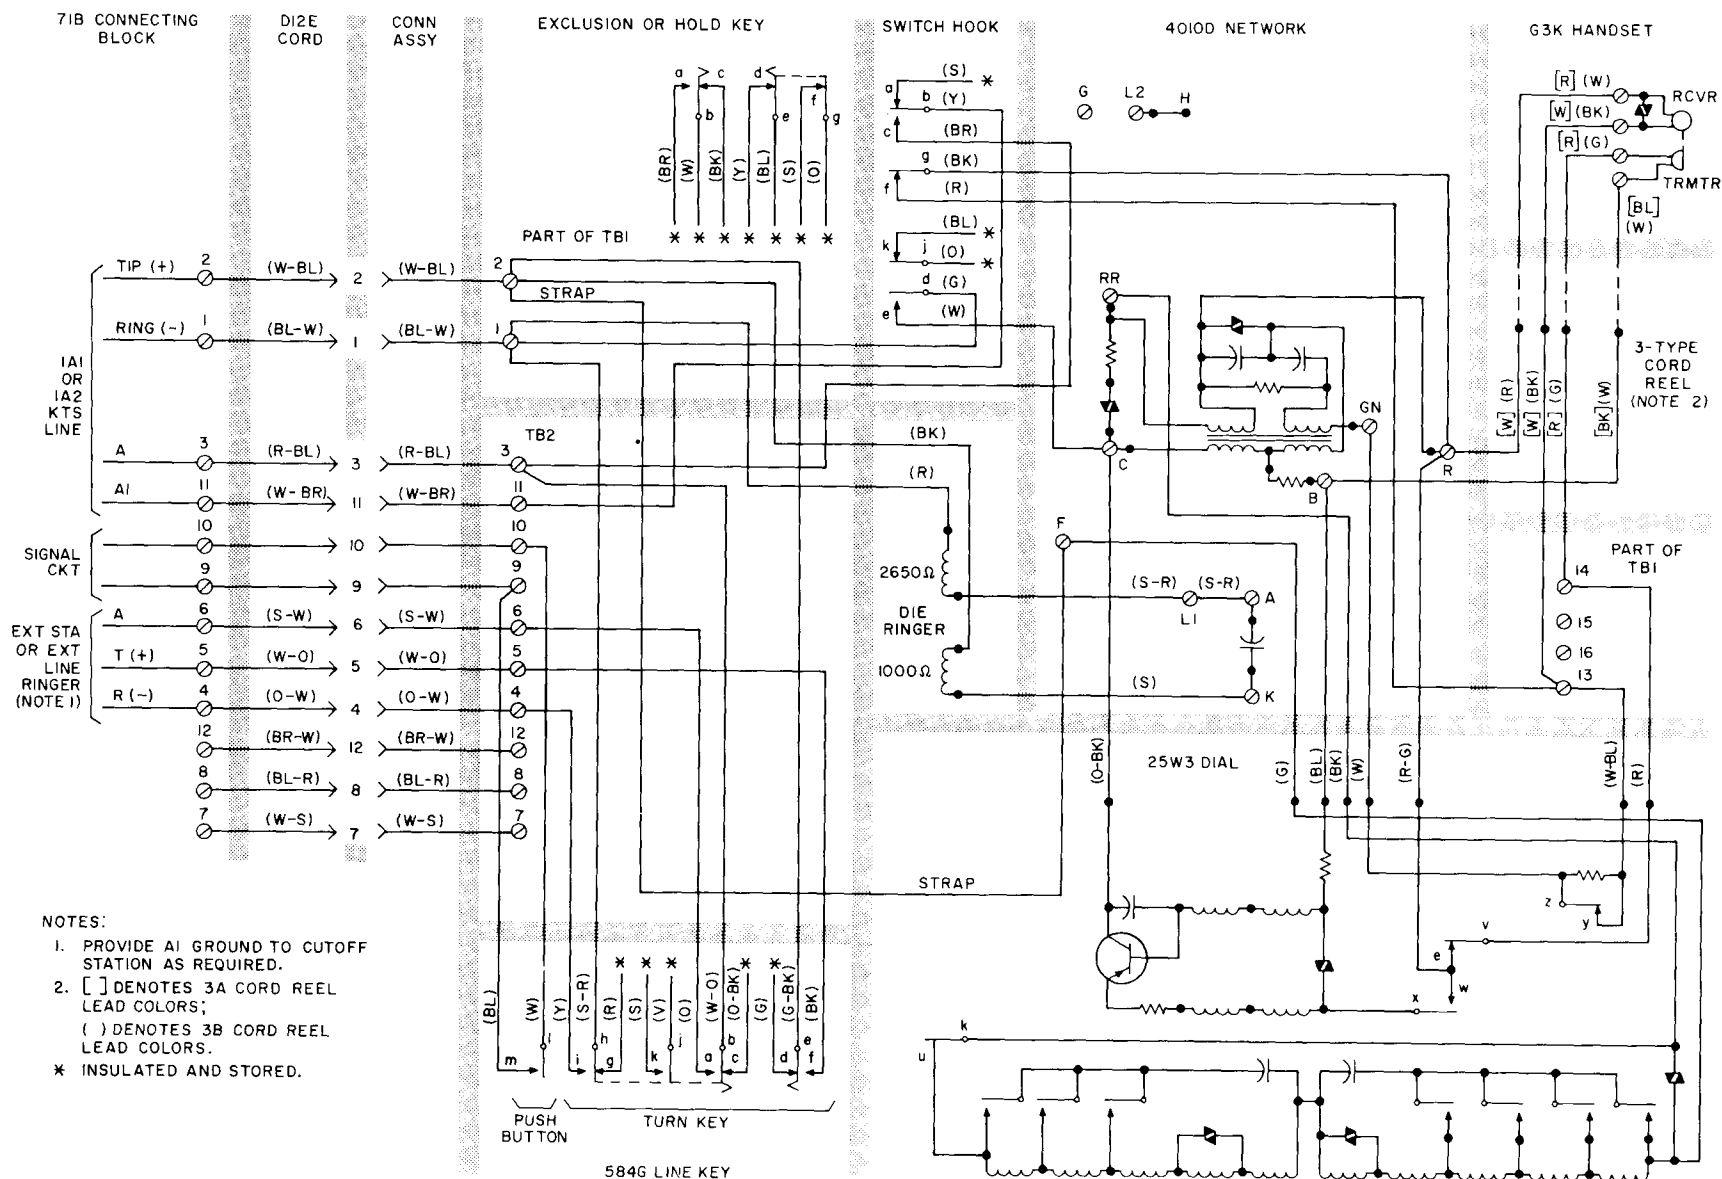


Fig. 2 — 1751C and 1751D Telephone Sets (Current Production) Wired For 1-Line Pickup, Signaling, and Cutoff Feature