

G LONG-NOSE PLIERS

DESCRIPTION AND USE

1. GENERAL

1.01 This section covers the description and use of the G long-nose pliers for splicing 10 or fewer pairs using 700-, 701-, or 702-type connectors.

2. DESCRIPTION

2.01 The G long-nose pliers is illustrated in Fig. 1. The jaws of the pliers are arranged to accommodate and to properly close 700-, 701-, and

702-type connectors. The pliers is also suitable for general use instead of B long nose pliers.

2.02 A pick is provided on the inside of one handle for the purpose of breaking out the side wall of the 700-type connector for half tapping operations.

3. USE

3.01 The use of the G long-nose plier for pressing connectors is illustrated in Steps 1, 2, and 3.


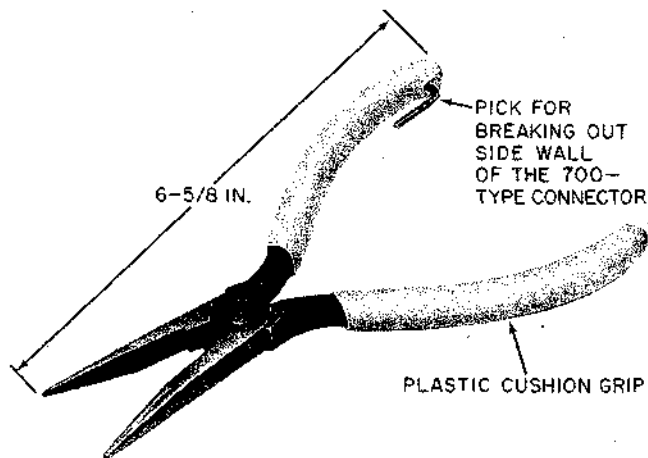


Fig. 1—G Long Nose Pliers



NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

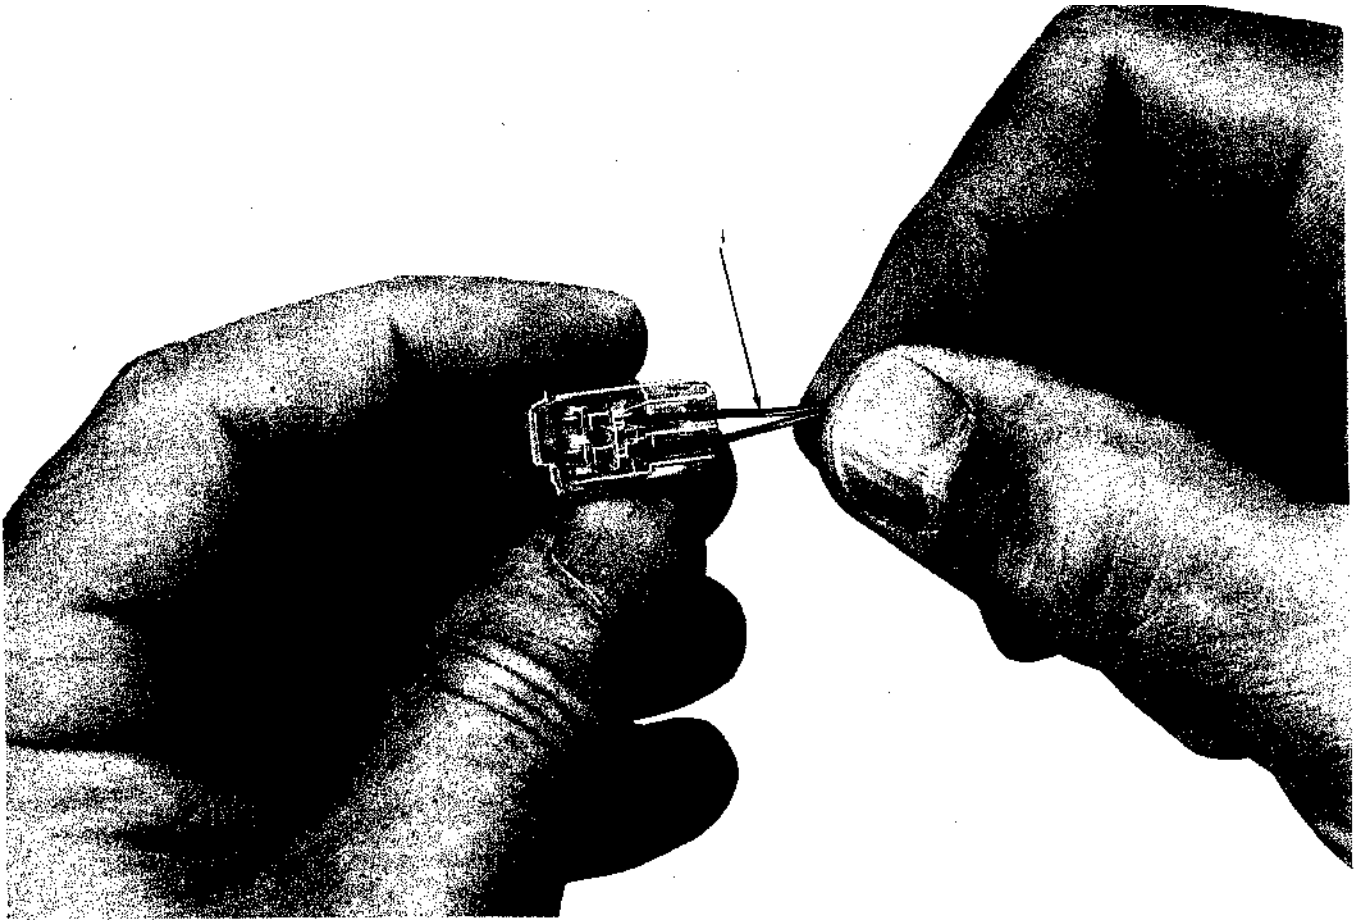



Step 1—Inserting Conductor

- ① Cut the matched conductors evenly and **FULLY** insert in the holes of the connector.

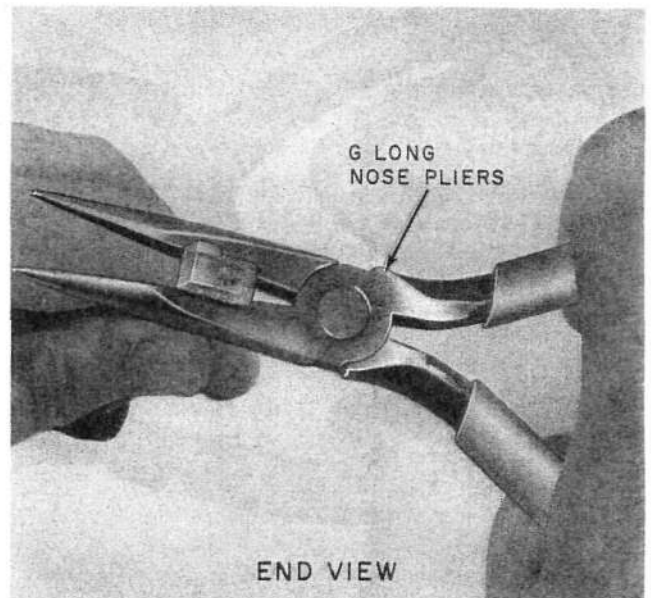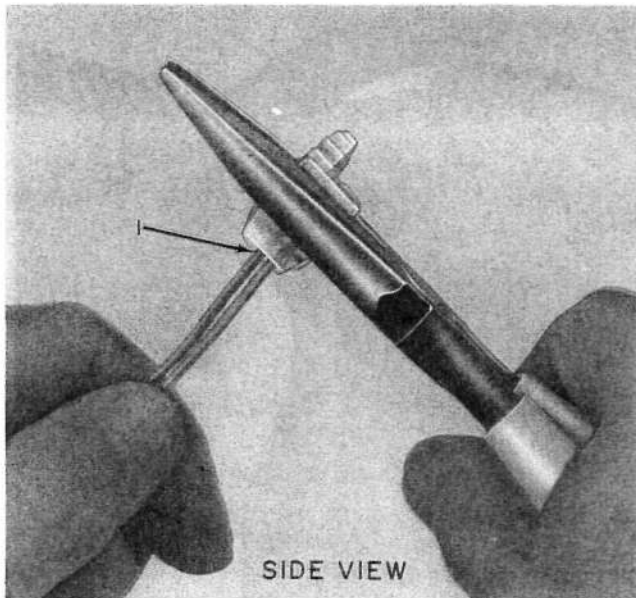

Step 2—Pressing 700-Type Connector

- (1) Using G long-nose pliers, press the connector.

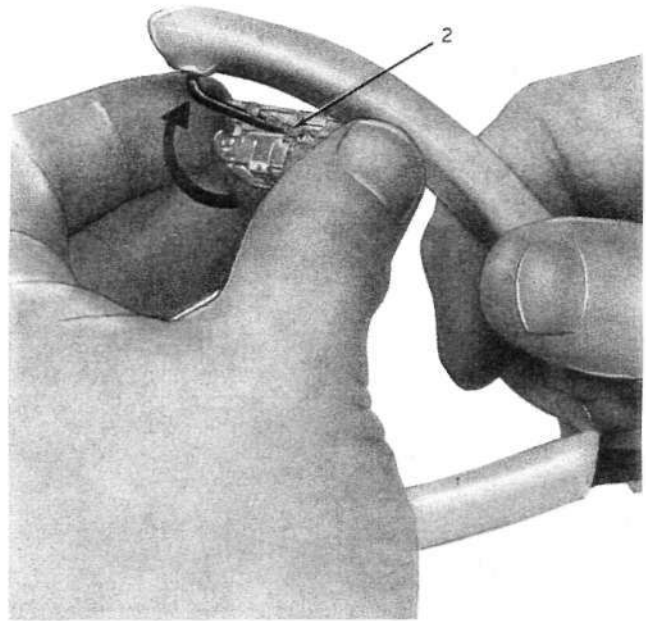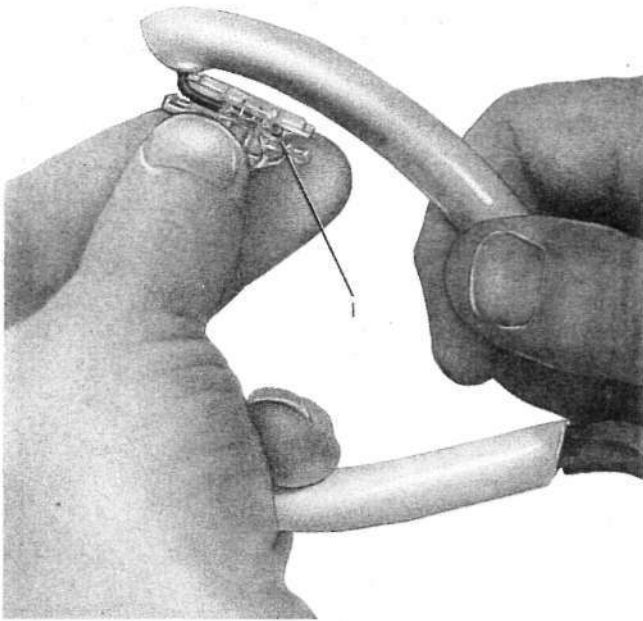

Step 3—Removing Side Wall for Making Bridge Splice

- (1) Push pick through membrane of connector.
- (2) Twist connector to remove sidewall.