

SUBSCRIBER SETS—634CG, CH, CK, CL; 684CK, CL

COMMON BATTERY — INDUCTION COIL TYPE — CONNECTIONS

RINGING CIRCUIT

TALKING CIRCUIT

LOCAL WIRING

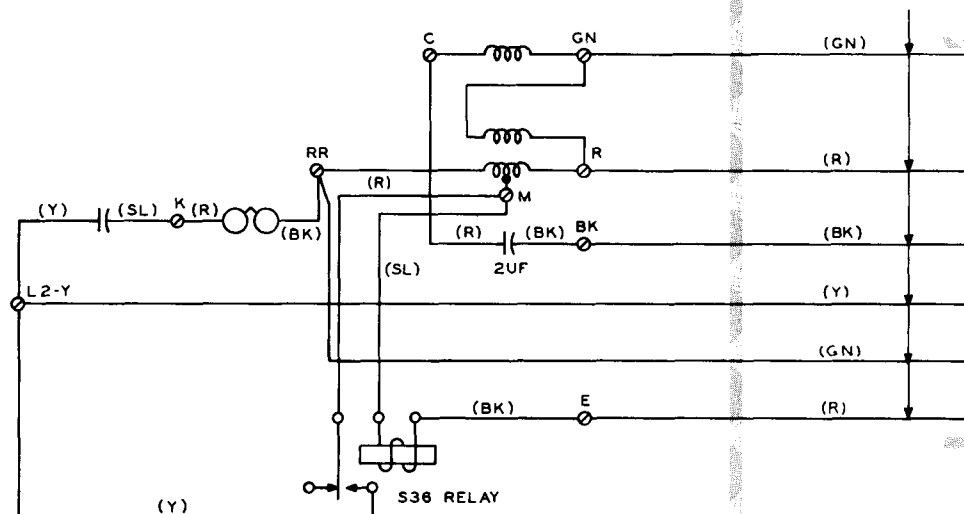


TABLE A — CONNECTIONS FOR LONG LOOPS

Type of Service	Subscriber Set 634CG, CH (Wire or Lead)											
	Ringer Lead		S-36 Relay Lead				Local Wiring from Coin Collector					
	R	BK	R	Y	BK	SL	GN	R	BK	Y	R	GN
Rcvr. Xmtr Types 155C, D, G, H 166C, D, G, H												
Hand Set Types 174C, D, G, H 174CS, GS, CT, GT 176C, D, G, H 176CS, GS, CT, GT	K	RR	M	L2Y	E	M	GN	R	BK	L2Y	E	RR

RINGING CIRCUIT

TALKING CIRCUIT

LOCAL WIRING

TABLE B
CONNECTIONS
FOR REDUCTION
OF INDUCTIVE NOISE

Type of Service	Subscriber Set 634CK, CL; 684CK, CL (Wire or Lead)							
	Ringer Lead		Local Wiring from Coin Collector					
	R	BK	GN	R	BK	Y	R	GN
Rcvr. Xmtr Types 155C, D, G, H 166C, D, G, H								
Hand Set Types 174C, D, G, H 174CS, GS, CT, GT 176C, D, G, H 176CS, GS, CT, GT	K	RR	GN	R	BK	L2Y	E	RR

Fig. 1 — Circuit Diagram for Connection with Coin Collectors