

SUBSCRIBER SETS—634CG, CH, CK, CL; 684CK, CL
COMMON BATTERY—INDUCTION COIL TYPE—CONNECTIONS

RINGING CIRCUIT

TALKING CIRCUIT

LOCAL WIRING

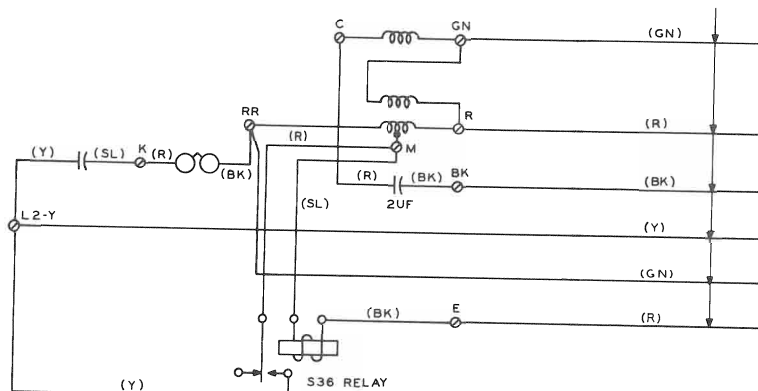


TABLE A—CONNECTIONS FOR LONG LOOPS

Type of Service	Subscriber Set 634CG, CH (Wire or Lead)												
Prepay Manual or Dial-Type Coin Collectors	Ringer Lead		S-36 Relay Lead					Local Wiring from Coin Collector					
	R	BK	R	Y	BK	SL	GN	R	BK	Y	R	GN	
Revrv. Xmtr Types 155C, D, G, H 166C, D, G, H													
Hand Set Types 174C, D, G, H 174CS, GS, CT, GT 176C, D, G, H 176CS, GS, CT, GT	K	RR	M	L2Y	E	M	GN	R	BK	L2Y	E	RR	

RINGING CIRCUIT

TALKING CIRCUIT

LOCAL WIRING

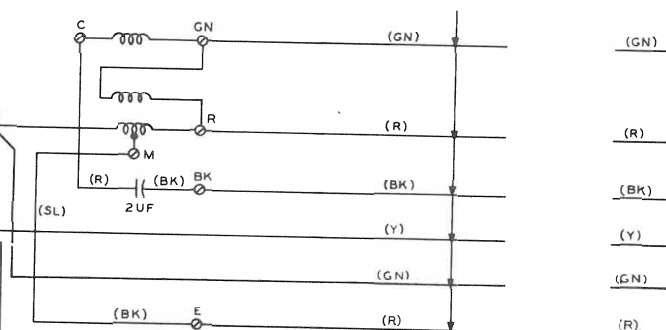


Fig. 1 — Circuit Diagram for Connection with Coin Collectors

TABLE B
CONNECTIONS
FOR REDUCTION
OF INDUCTIVE NOISE

Type of Service	Subscriber Set 634CK, CL; 684CK, CL (Wire or Lead)								
Prepay Manual or Dial-Type Coin Collectors (Reduction of Inductive Noise)	Ringer Lead			Local Wiring from Coin Collector					
	R	BK	GN	R	BK	Y	R	GN	
Revr, Xmtr Types 155C, D, G, H 166C, D, G, H									
Hand Set Types 174C, D, G, H 174CS, GS, CT, GT 176C, D, G, H 176CS, GS, CT, CT	K	RR	GN	R	BK	L2Y	E	RR	