

2.8 System Restart

(Extract)

After starting the system, if the system does not operate properly, restart the system.

Before restarting the system, try the system feature again to confirm whether there definitely is a problem or not.

System Restart causes the following.

1. Camp-on is cleared.
2. Calls on Hold are terminated.
3. Calls on Exclusive Hold are terminated.
4. Calls in progress are terminated.
5. Call Park is cleared.
6. Last Number Redial is cleared.
7. Saved Number Redial is cleared.
8. Message Waiting is cleared.

Other data is not cleared by System Restart.


1. Turn the Power switch off and then on.

Notice If the system still does not operate properly, please see Section 2.9, "System Data Clear".

2.9 System Data Clear

When the system does not operate properly after restarting, you can clear the programming data stored in the system. The system will restart with the default settings. First, try system program [999]. If the system still does not operate properly, please follow the procedure below.

1. Loosen the screws and open the top and bottom front covers.
2. Slide the System Clear Switch to the “CLEAR” position.
3. Press the Reset Button.
4. Return the System Clear Switch to the “NORMAL” position before the power indicator stops flashing.
(The power indicator will flash for about 10 seconds.)

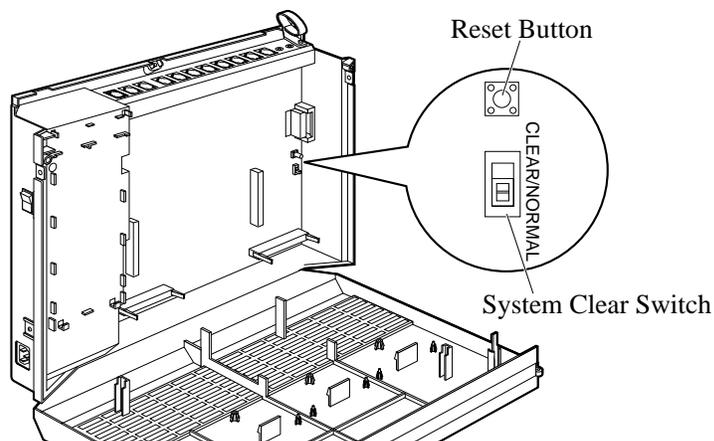

Notice After pressing the Reset Button, return the System Clear Switch to the “NORMAL” position in step 4 before the power indicator stops flashing. Otherwise, the system will not clear.

Programming Reference

Section 4, System Programming
[999] System Data Clear

